1.0 Reference and Address			
Report Number	241231145GZS-001	Original Issued: 9-Feb-2026	Revised: None
Standard(s)	Motor-operated Household Food Preparing Machines [UL 982:2019 Ed.8+R:23Apr2024] Portable Electrical Motor-Operated and Heating Appliances: General Requirements (R2018) [CSA C22.2#1335.1:1993 Ed.1+G1] Portable Electrical Motor-Operated and Heating Appliances: Particular Requirements for Electrical Motor-Operated Kitchen Appliances (R2018) [CSA C22.2#1335.2.14:1993 Ed.1+G1] Household Electric Cooking and Food Serving Appliances [UL 1026:2012 Ed.6+R:29Sep2023] Safety of Household and Similar Appliances - Part 1: General Requirements [CSA C22.2#60335-1:2016 Ed.2] Household and Similar Electrical Appliances - Safety - Part 2-9: Particular Requirements for Grills, Toasters and Similar Portable Cooking Appliances [CSA C22.2#60335-2-9:2020 Ed.2]		

Applicant	Zhejiang Tianxi Kitchen Appliance Co., Ltd.	Manufacturer 1	**Zhejiang Tianxi Kitchen Appliance Co., Ltd.**
Address	No. 1 West 2nd Road, Huzhen Town, Jinyun, LISHUI Zhejiang 321404	Address	No.8 Shanyan Road, Huzhen, Jinyun, LISHUI, Zhejiang
Country	CHINA	Country	CHINA
Contact	Caiqing Zhao	Contact	Caiqing Zhao
Phone	13928676429	Phone	13928676429
FAX	NA	FAX	NA
Email	c.qzhao@163.com	Email	c.qzhao@163.com
Manufacturer 2	**Tianxi Kitchen Appliances (Thailand) Co., Ltd.**	Manufacturer 3	**Tianxi Kitchen Appliances (Thailand) Co., Ltd.**
Address	7/254 Moo.6 T. Mabyangporn A. Pluakdaeng Rayong Province 21140	Address	384/1,2,3,4,7 Moo.2, Phana Nikhom Subdistrict, Nikhom Phatthana District, Rayong Province 21180
Country	THAILAND	Country	THAILAND
Contact	LIAO GUANGCE	Contact	LIAO GUANGCE
Phone	968638628	Phone	954297875
FAX	NA	FAX	NA
Email	liaoguangce@tianxi.com	Email	liaoguangce@tianxi.com

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

2.0 Product Description	
Product	Cookie Maker
Brand name	Zhejiang Tianxi Kitchen Appliance Co., Ltd
Description	The product covered by this report is Cookie Maker for household and indoor use, rated 120V, 60Hz, provided with a non-detachable power supply cord terminated in a 3-wire grounding plug.
Models	RRT34001, RRT34001-UL.
Model Similarity	Model RRT34001-UL is identical to Model RRT34001 except model number.
Ratings	120V, 60Hz, 1650W.
Other Ratings	NA

3.0 Product Photographs

Photo 1 - External view for model RRT34001


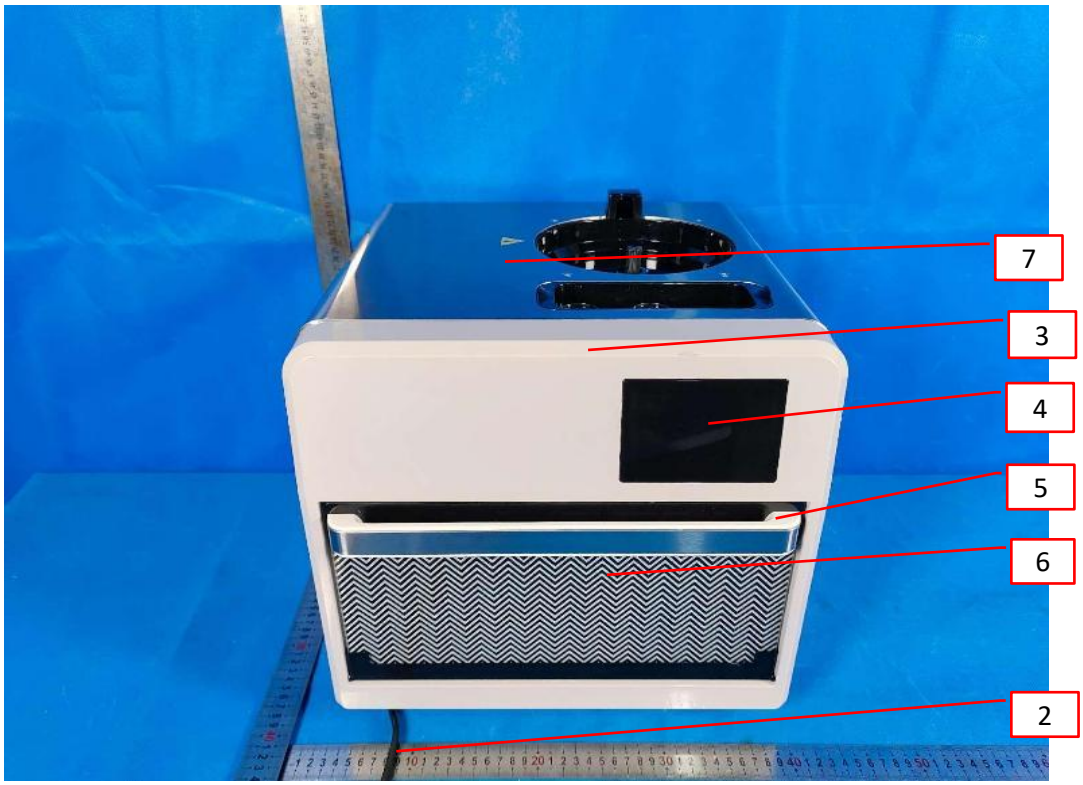


Photo 2 - External view for model RRT34001

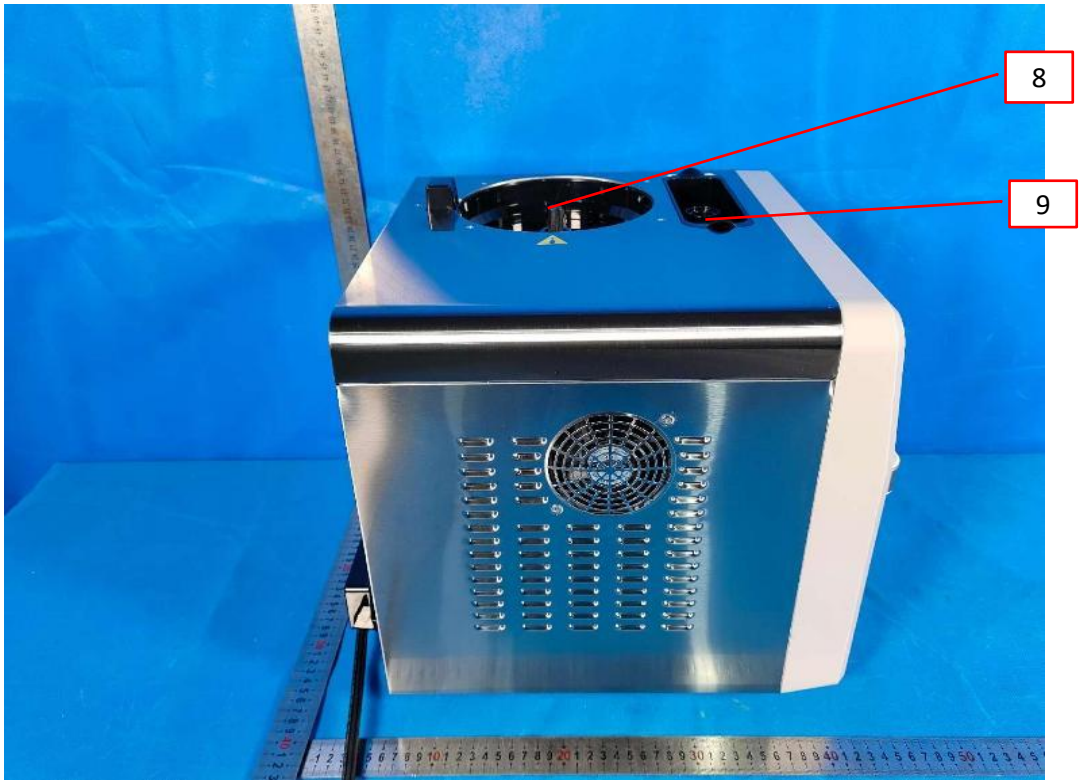

3.0 Product Photographs

Photo 3 - External view for model RRT34001


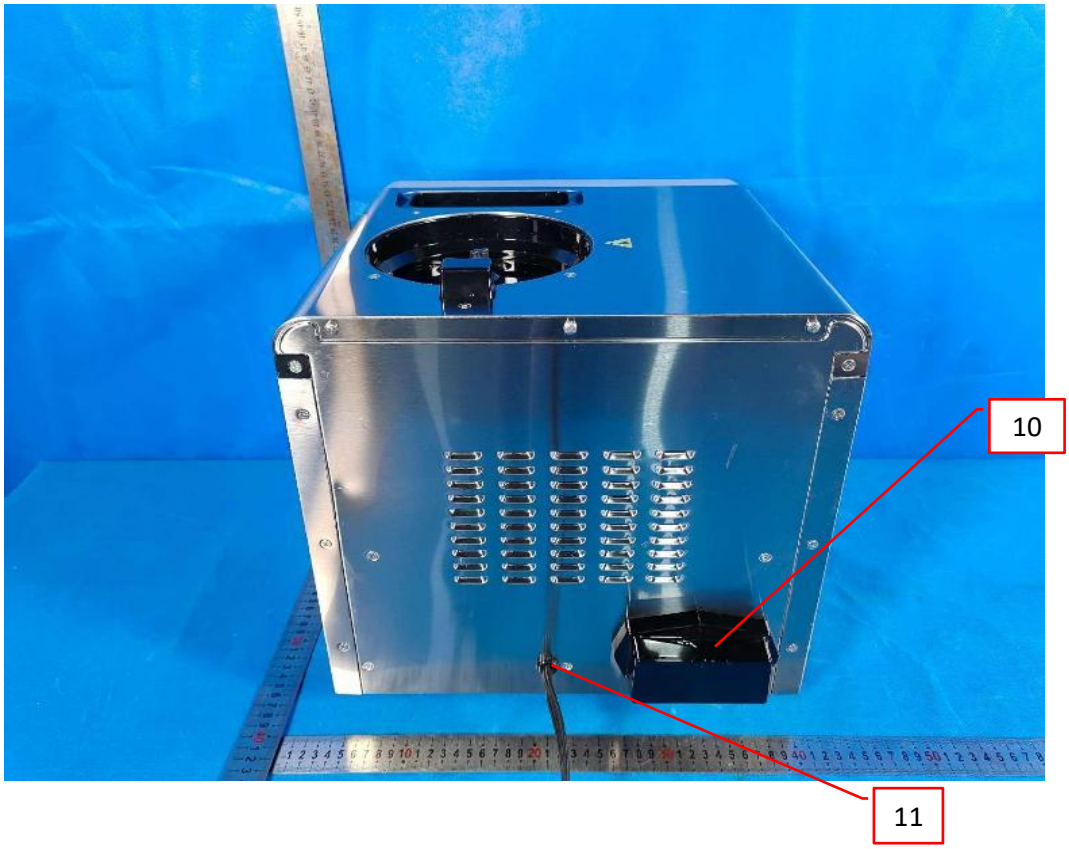


Photo 4 - External view for model RRT34001

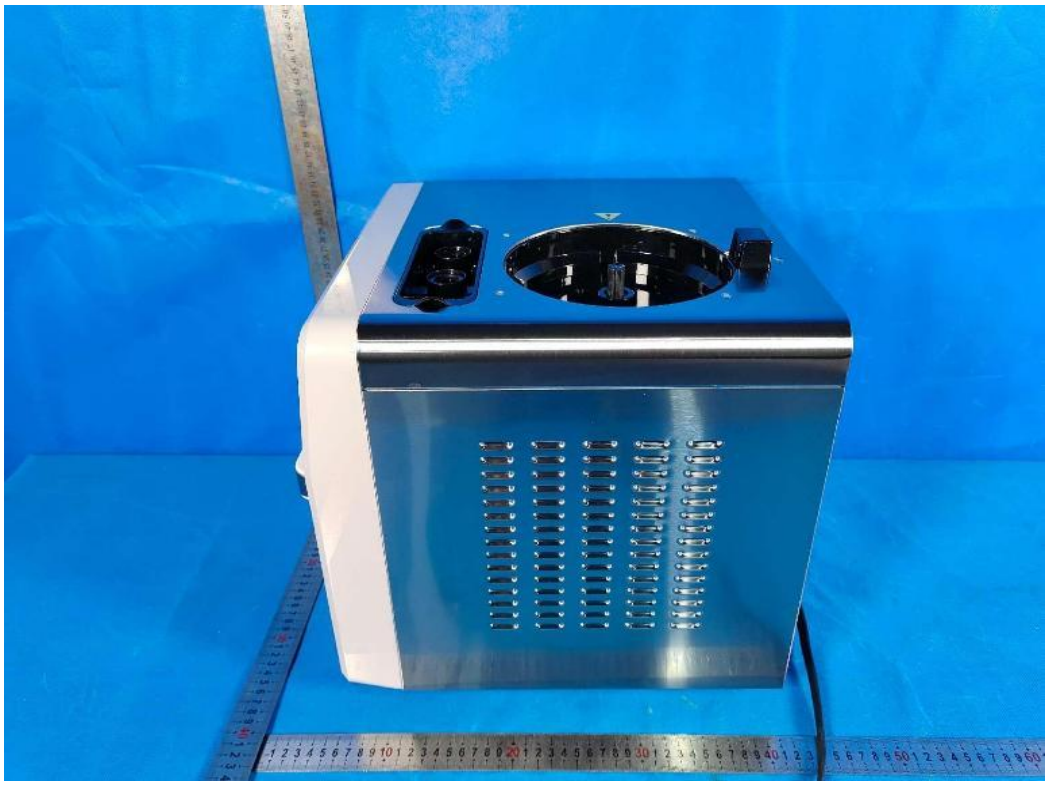

3.0 Product Photographs

Photo 5 - External view for model RRT34001


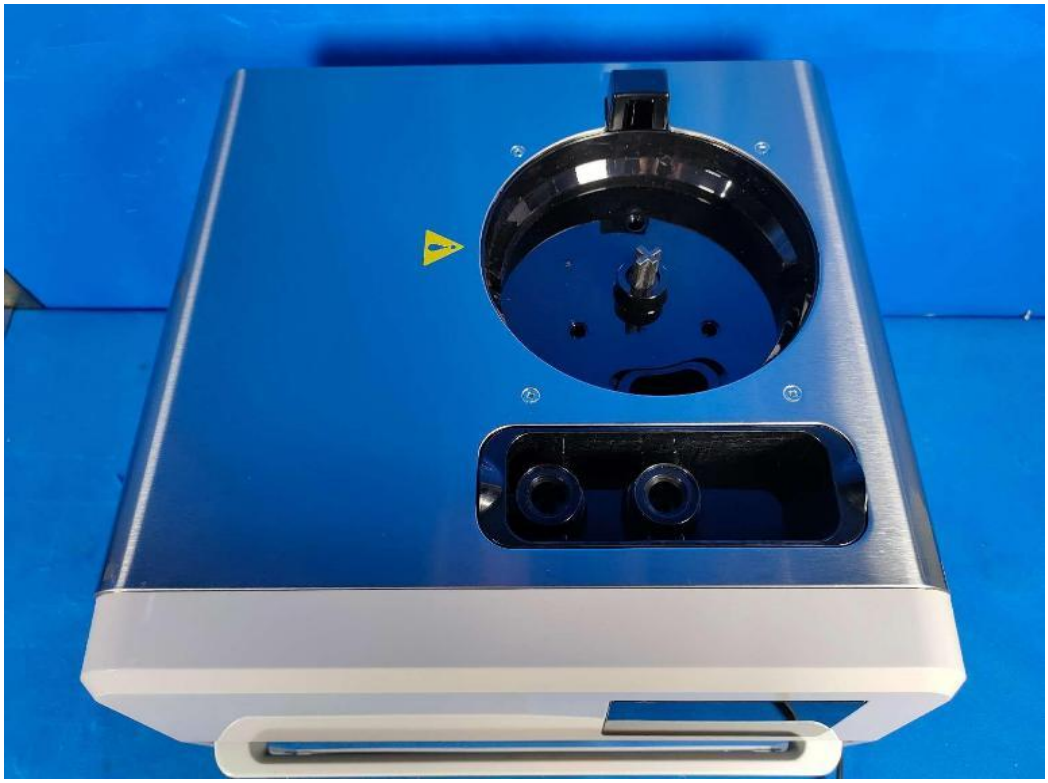


Photo 6 - External view for model RRT34001

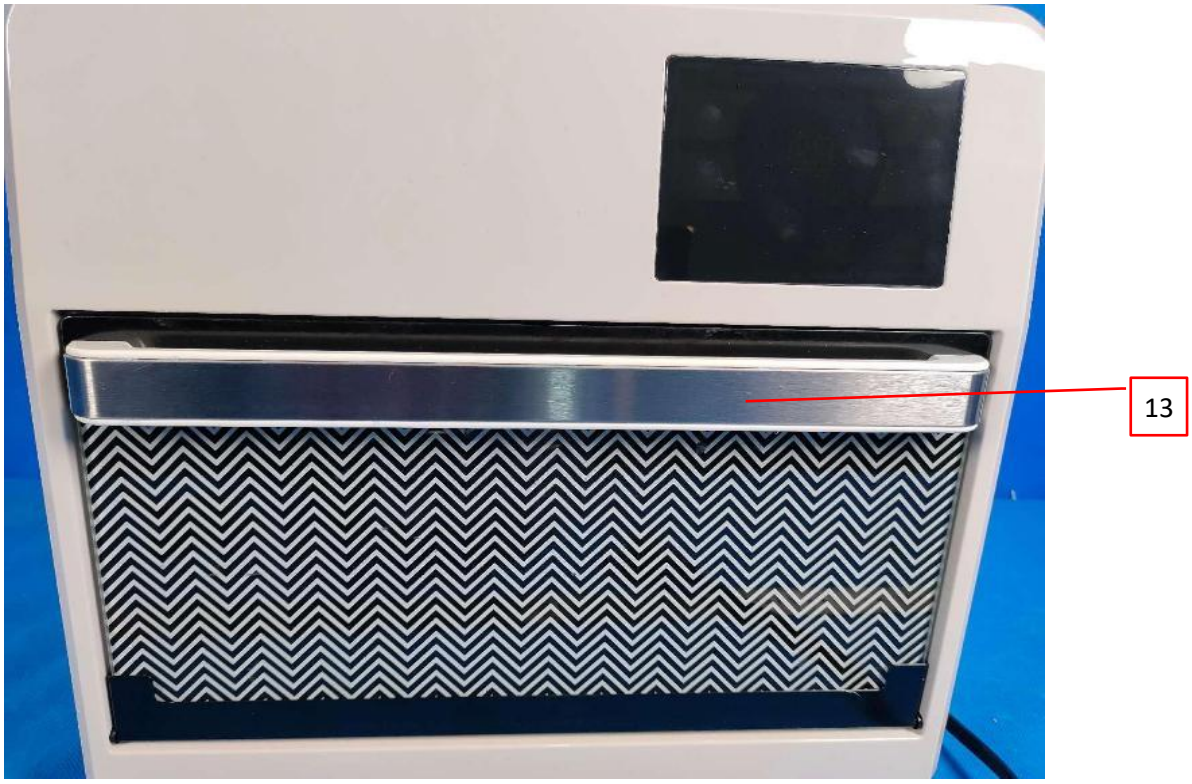

3.0 Product Photographs

Photo 7 - External view for model RRT34001

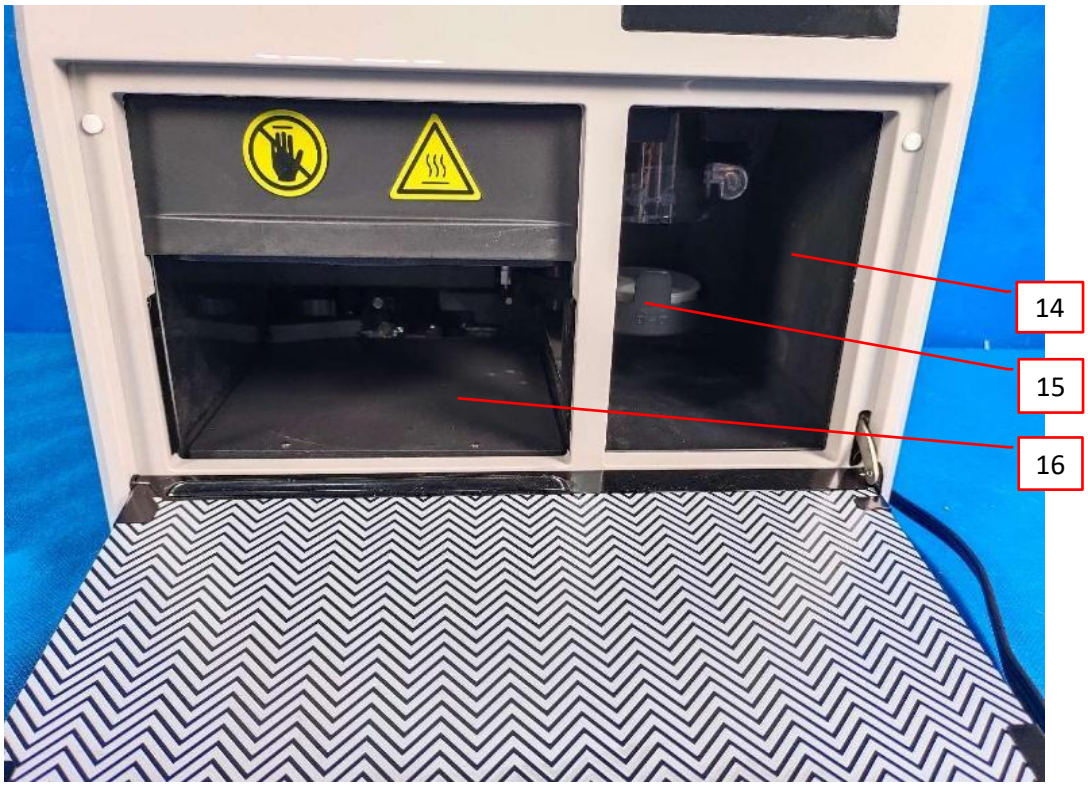


Photo 8 - External view for model RRT34001



3.0 Product Photographs

Photo 9 - Internal view for model RRT34001


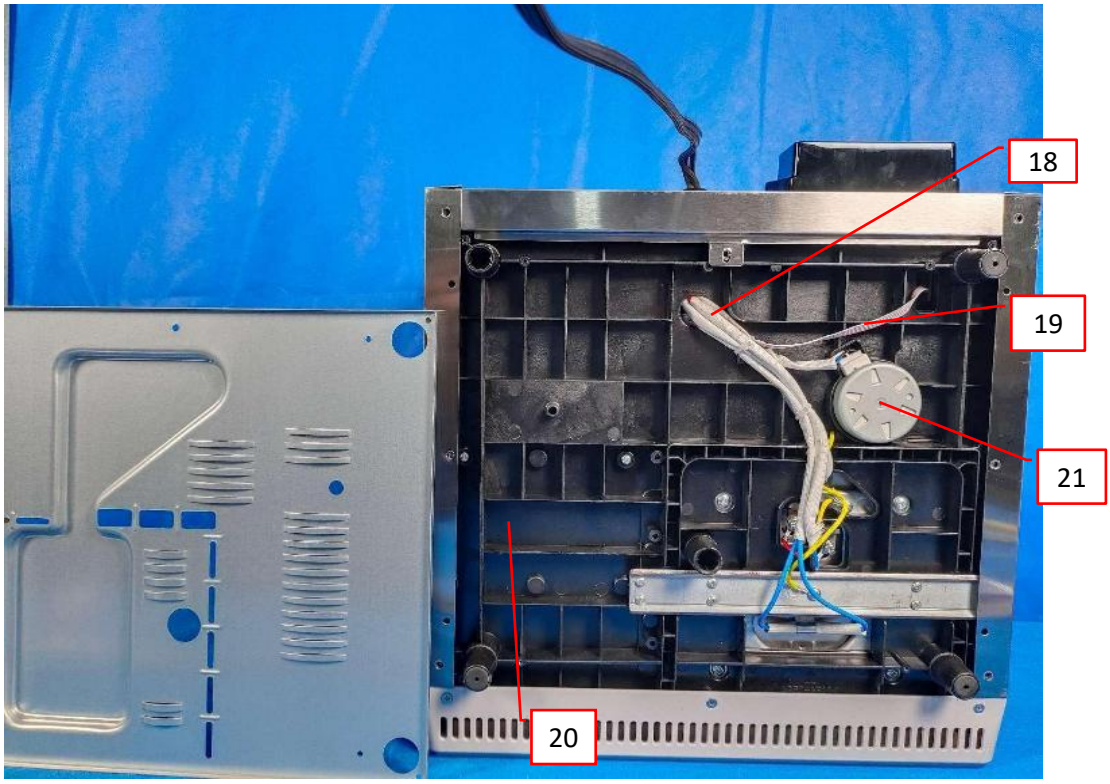


Photo 10 - Internal view for model RRT34001

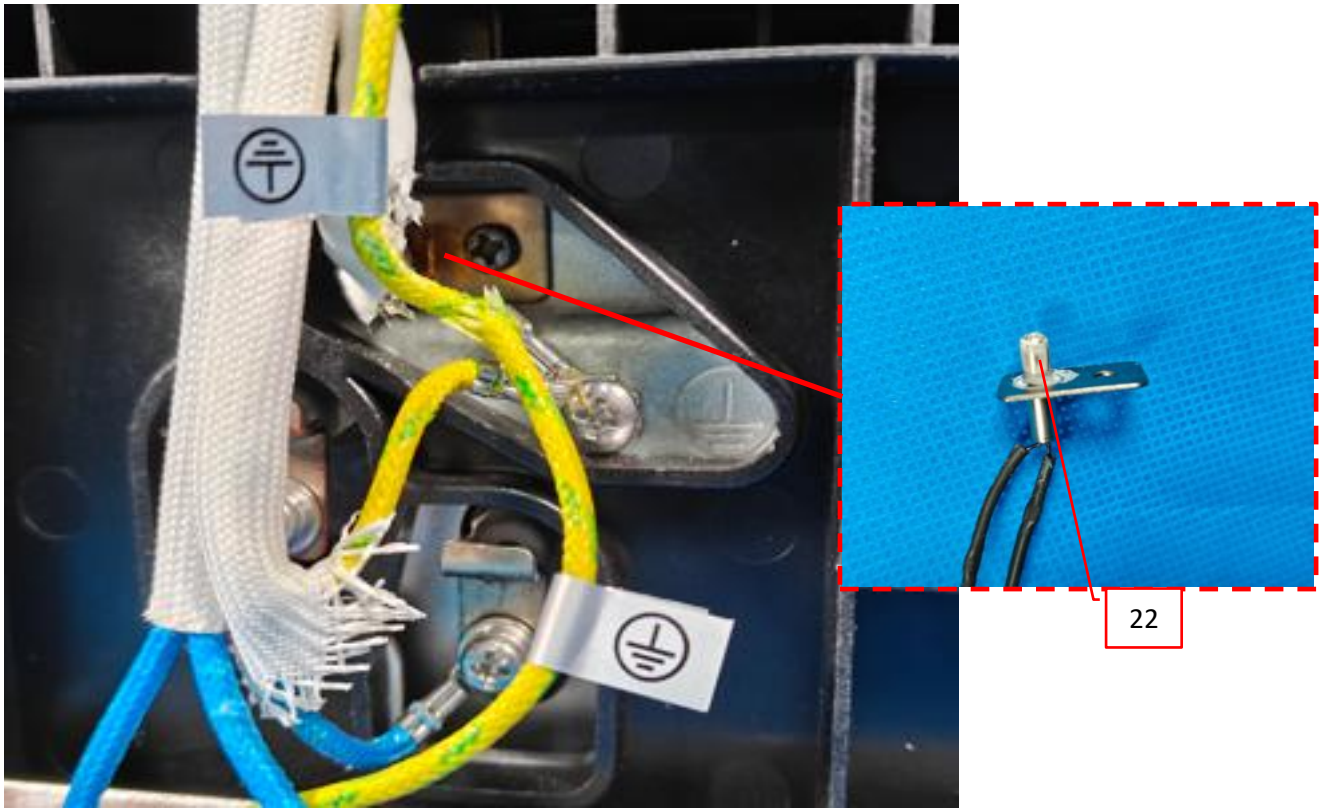

3.0 Product Photographs

Photo 11 - Internal view for model RRT34001


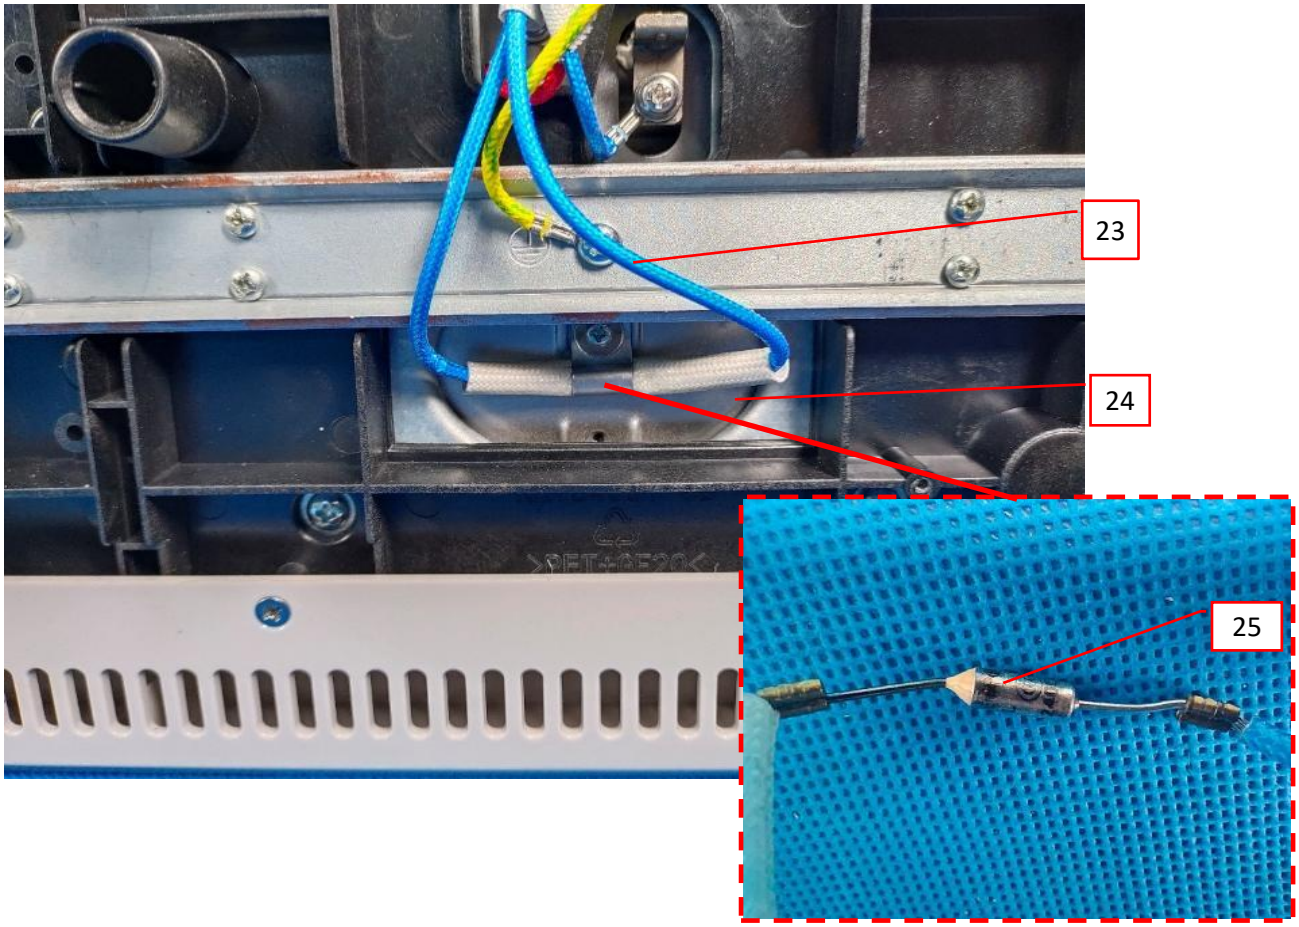


Photo 12 - Internal view for model RRT34001

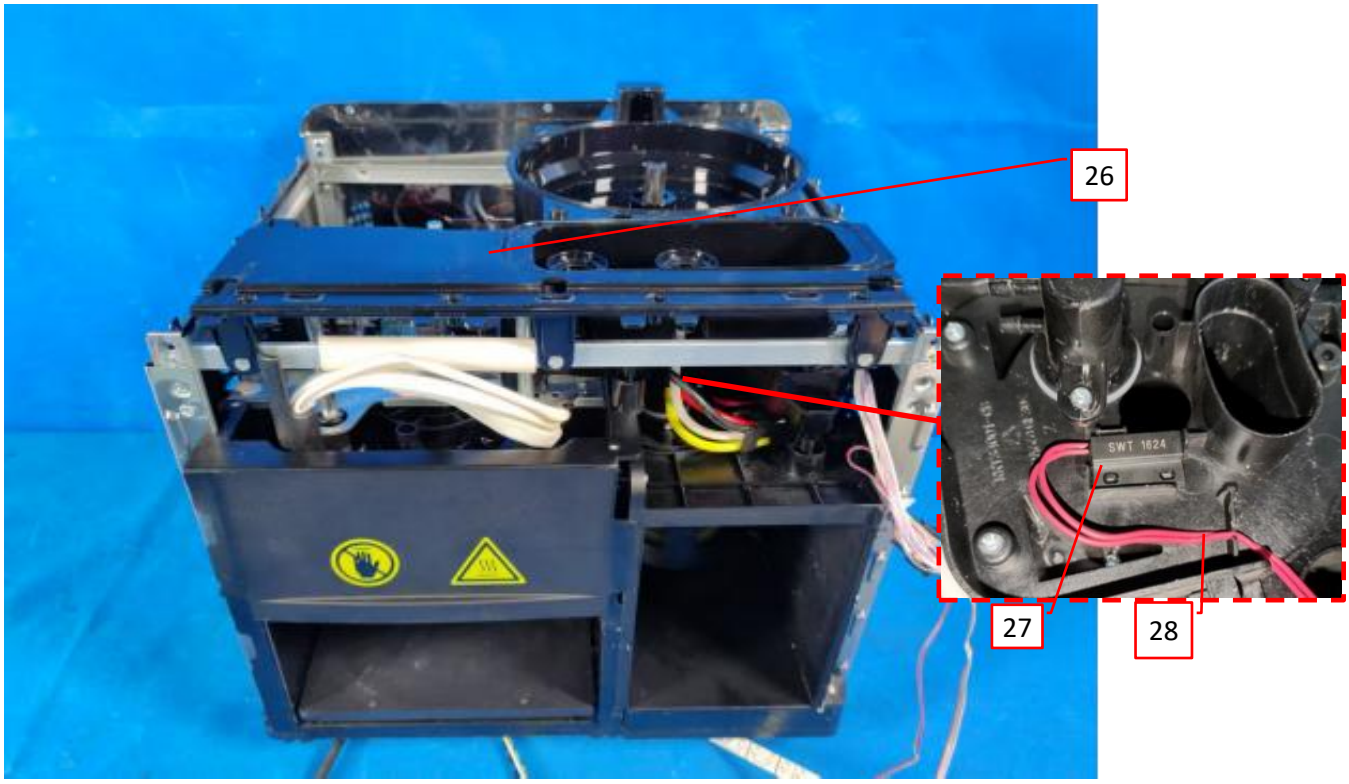

3.0 Product Photographs

Photo 13 - Internal view for model RRT34001


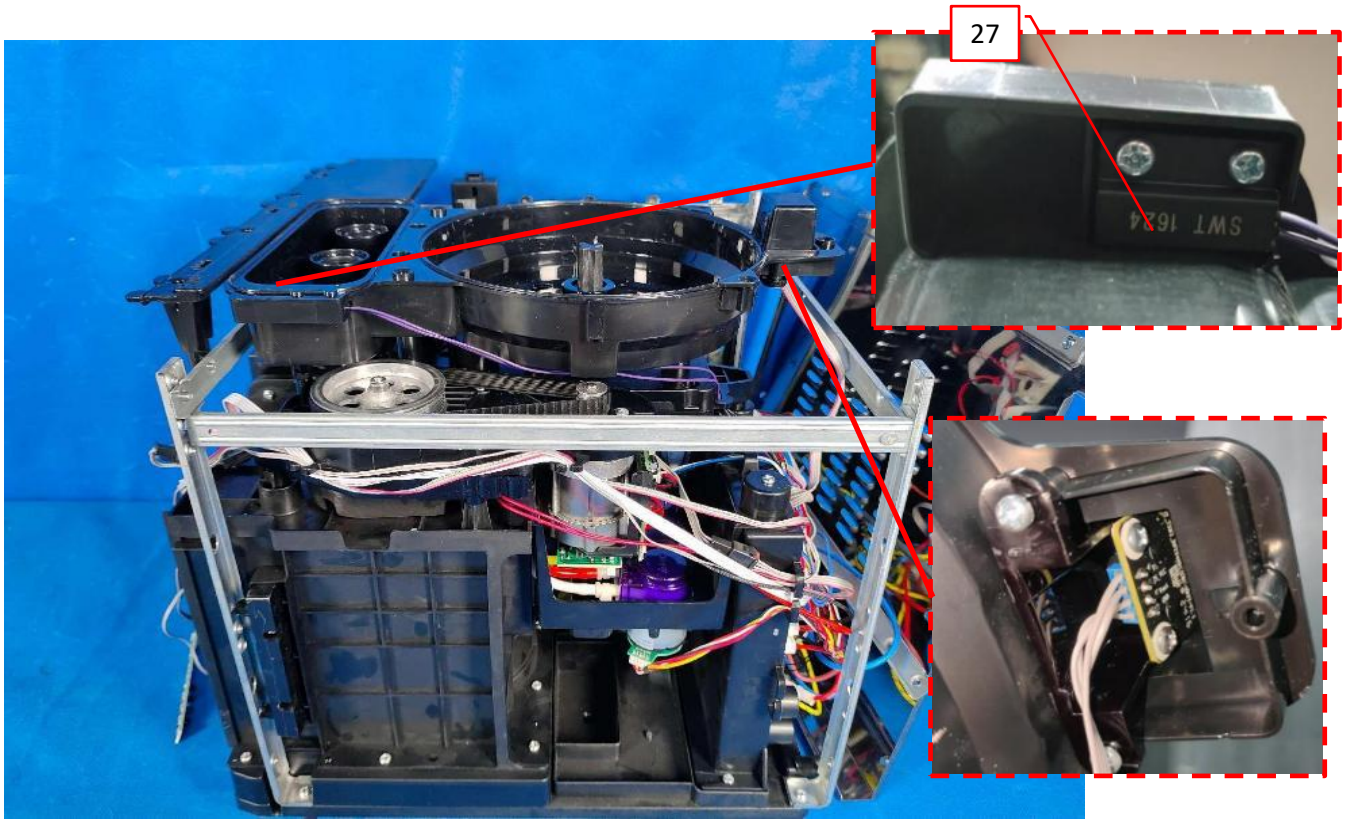


Photo 14 - Internal view for model RRT34001

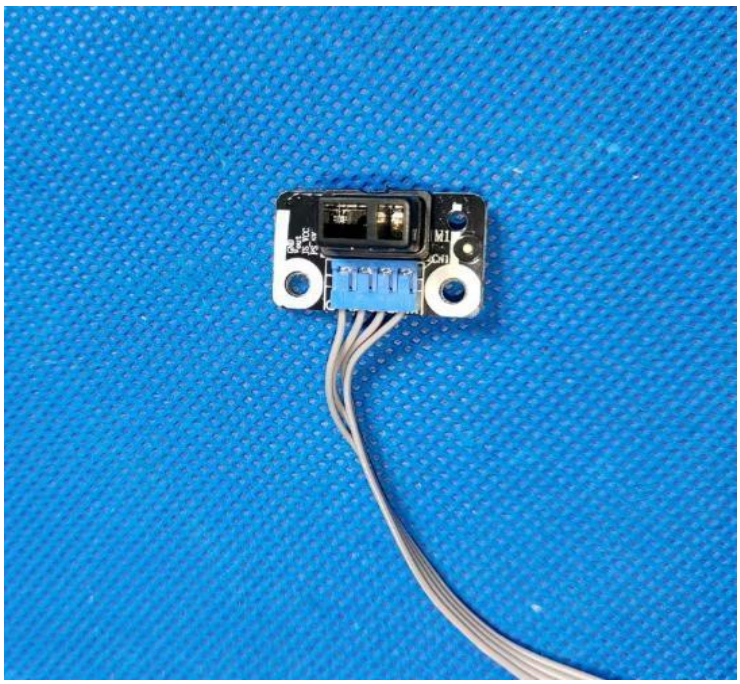

3.0 Product Photographs

Photo 15 - Internal view for model RRT34001


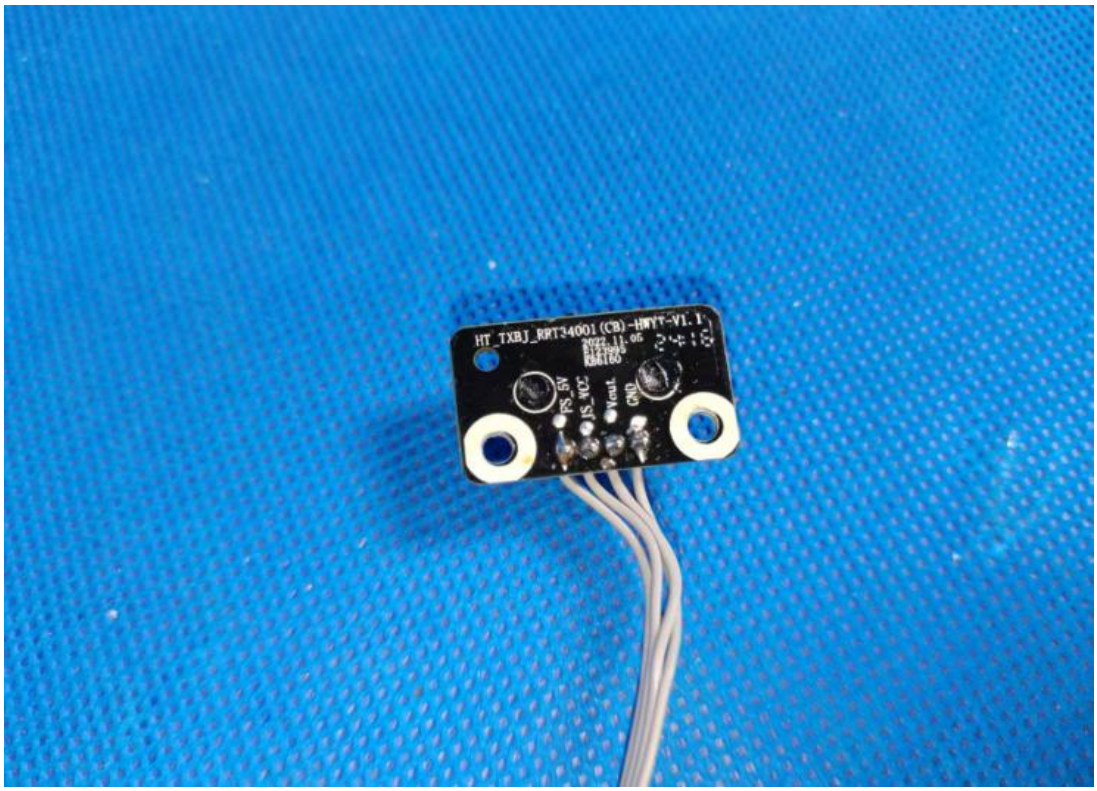


Photo 16 - Internal view for model RRT34001

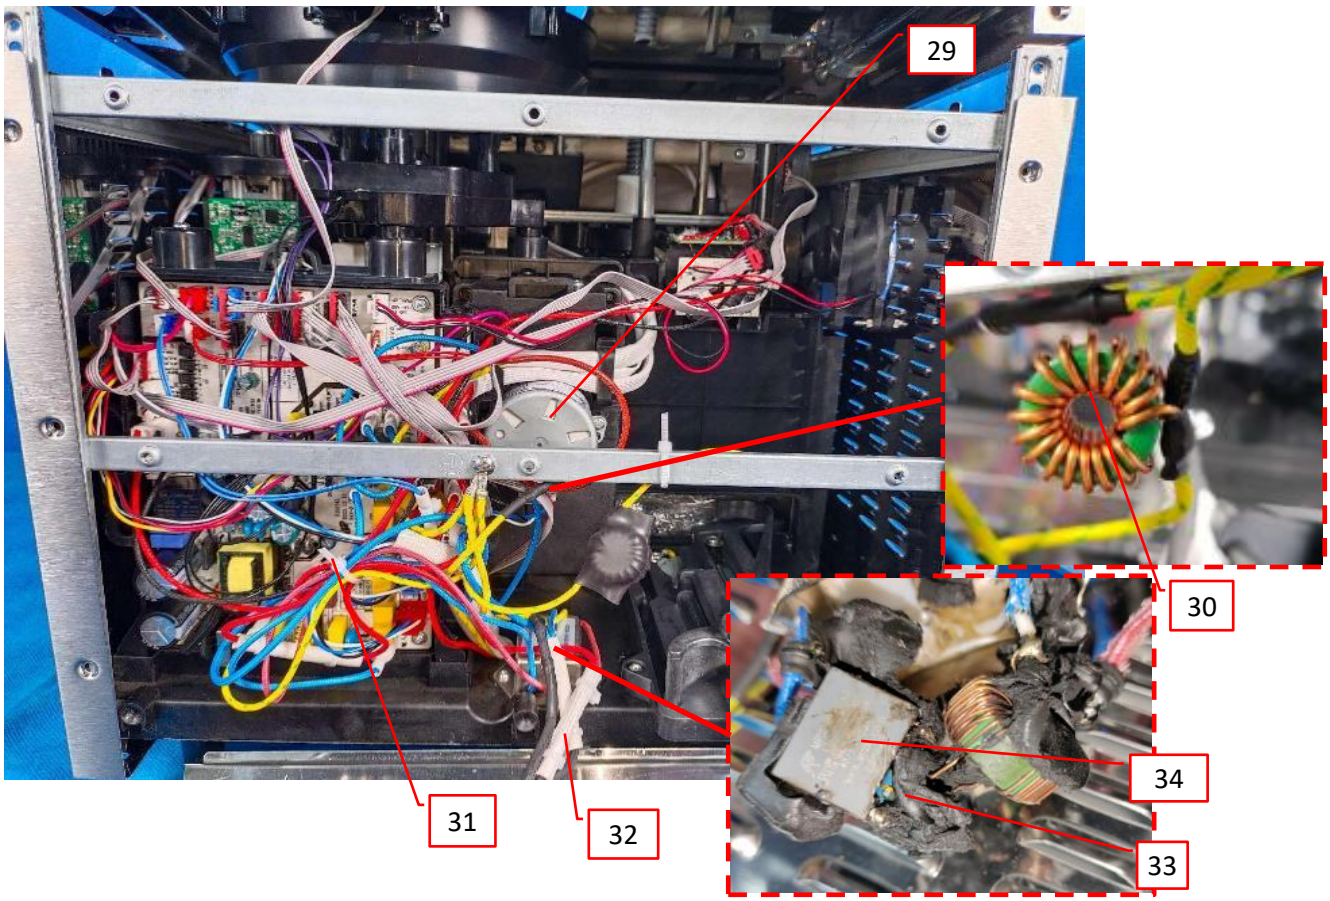

3.0 Product Photographs

Photo 17 - Power PCB view for model RRT34001


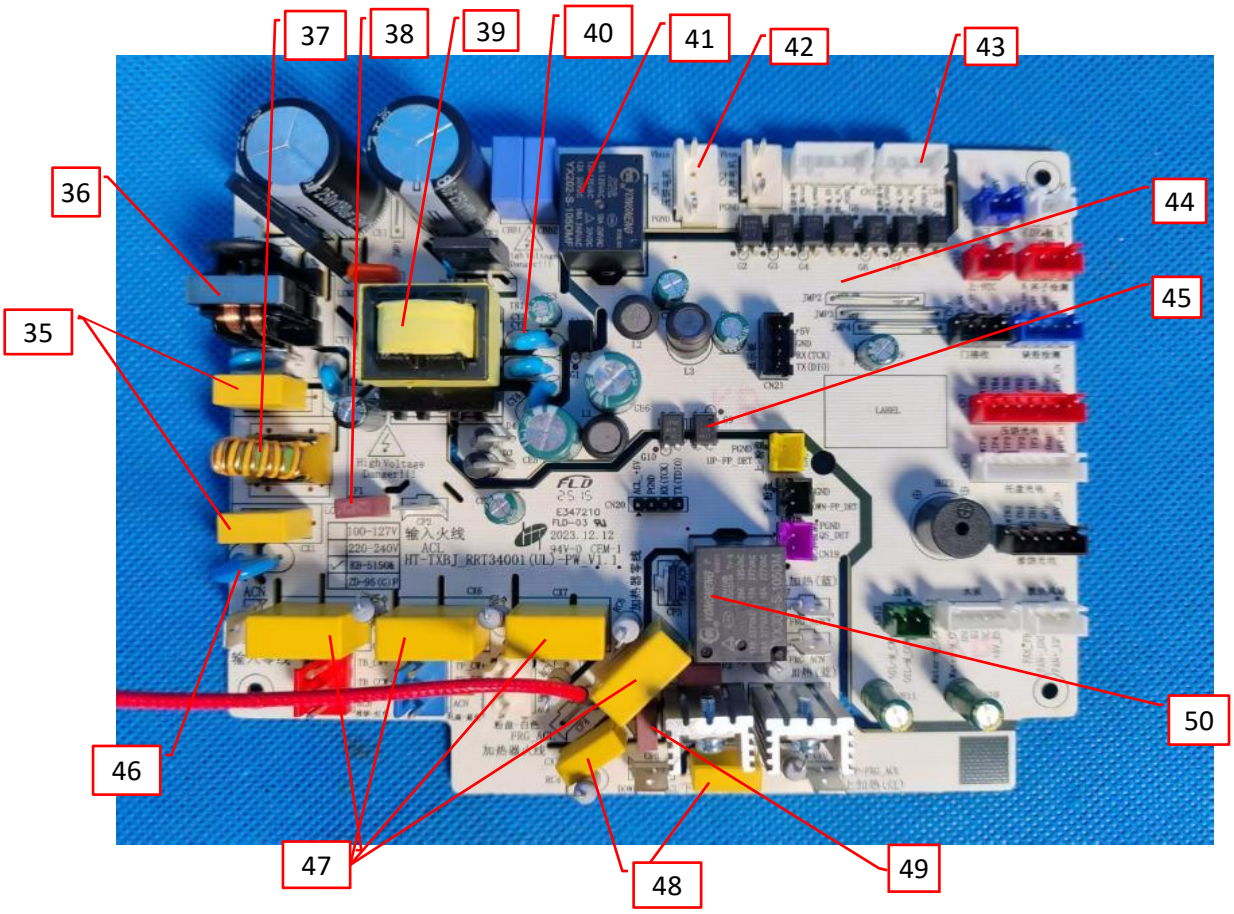


Photo 18 - Power PCB view for model RRT34001

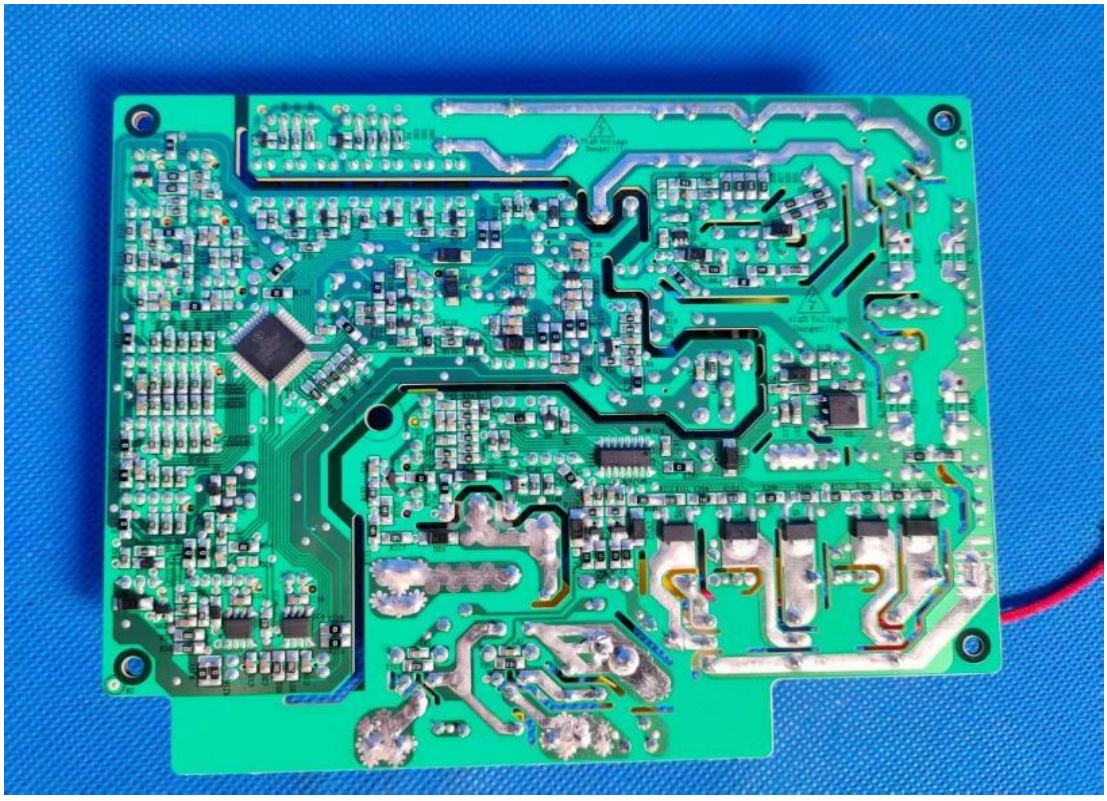

3.0 Product Photographs

Photo 19 - Internal view for model RRT34001


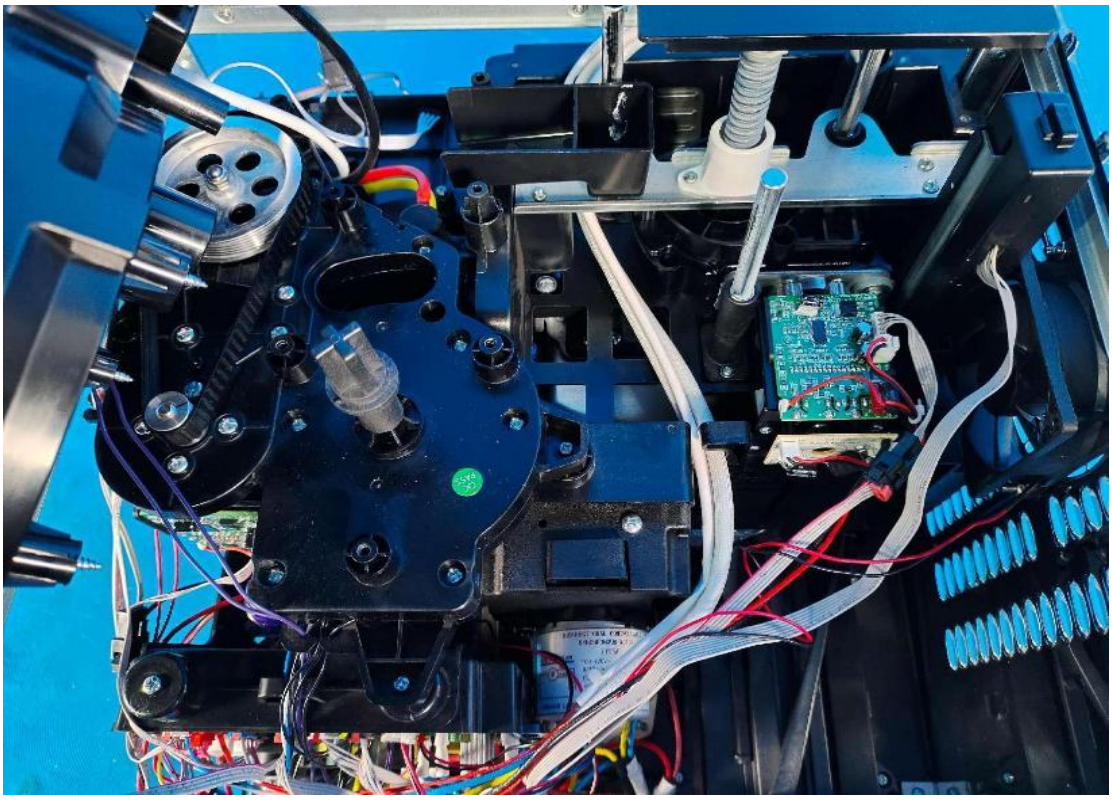


Photo 20 - Internal view for model RRT34001

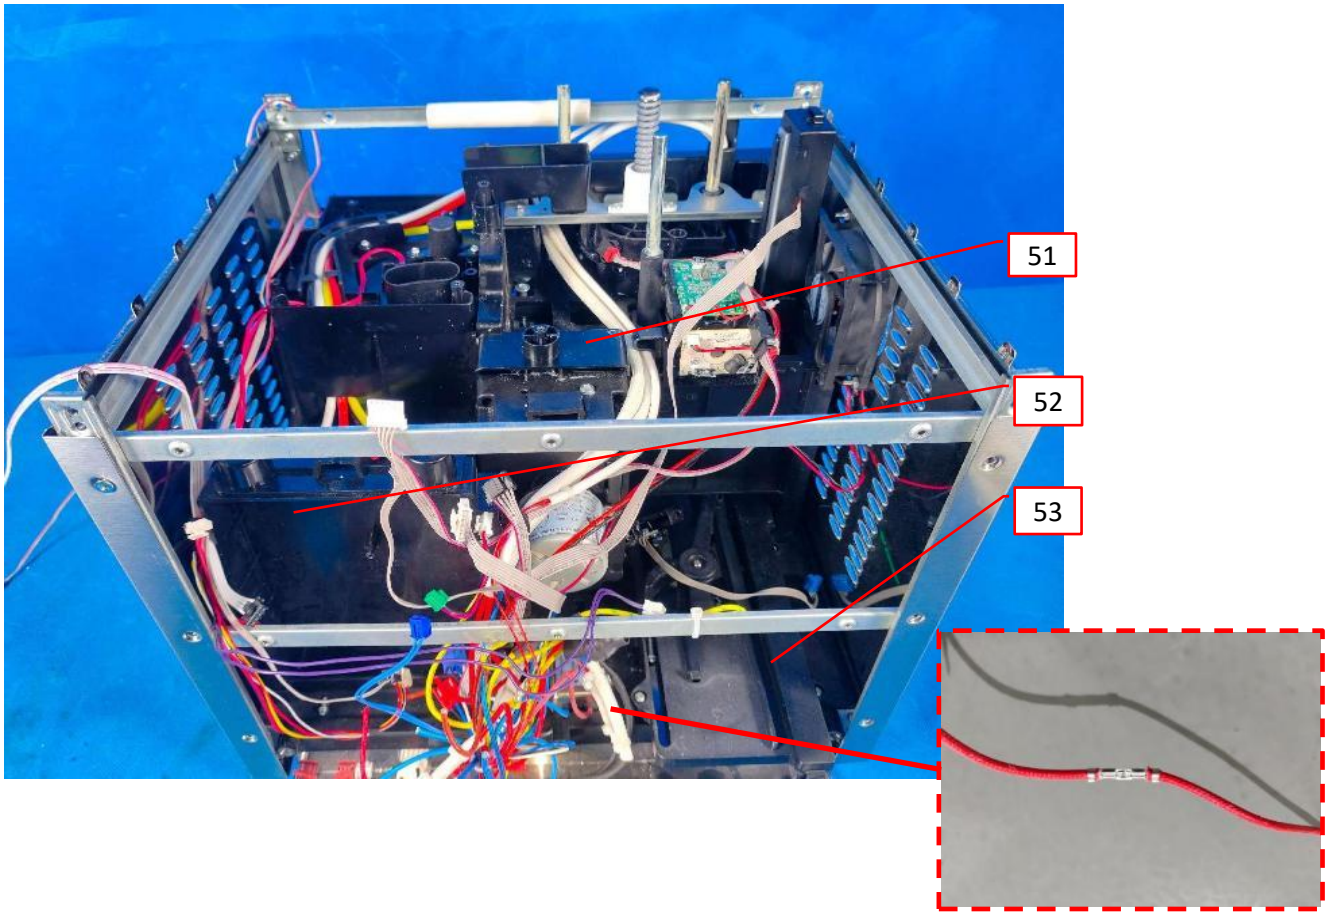

3.0 Product Photographs

Photo 21 - Internal view for model RRT34001


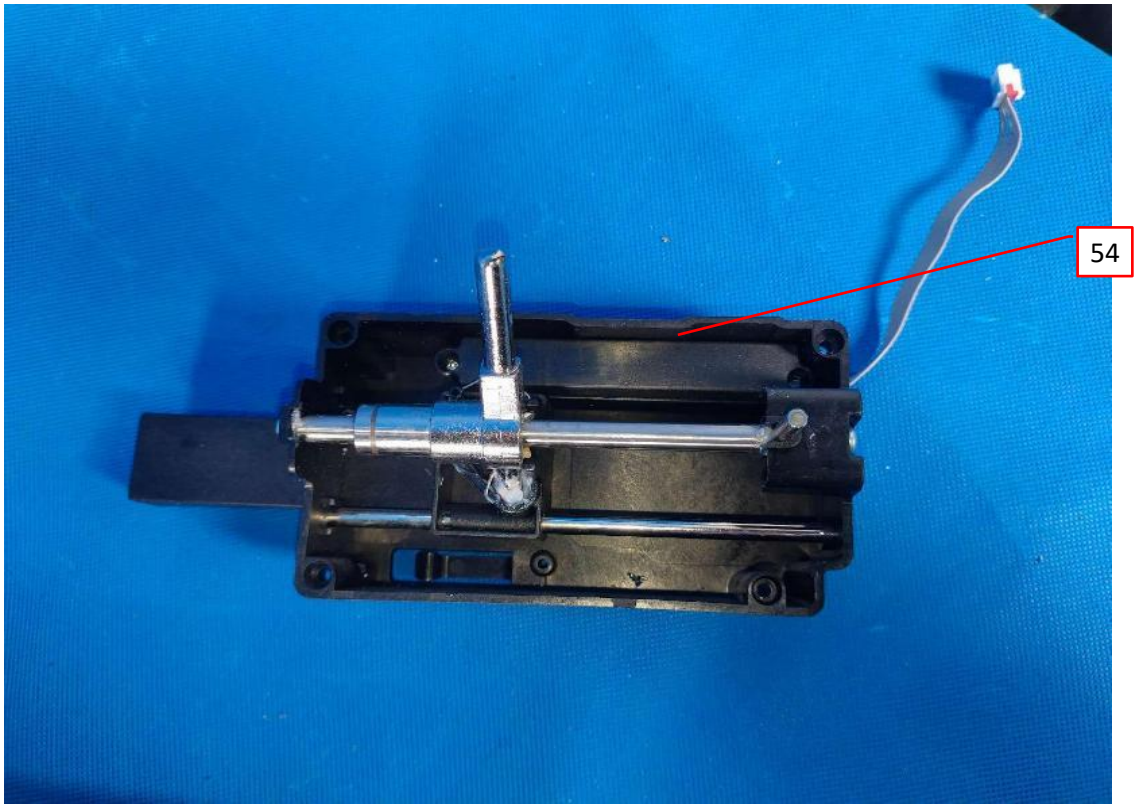


Photo 22 - Internal view for model RRT34001

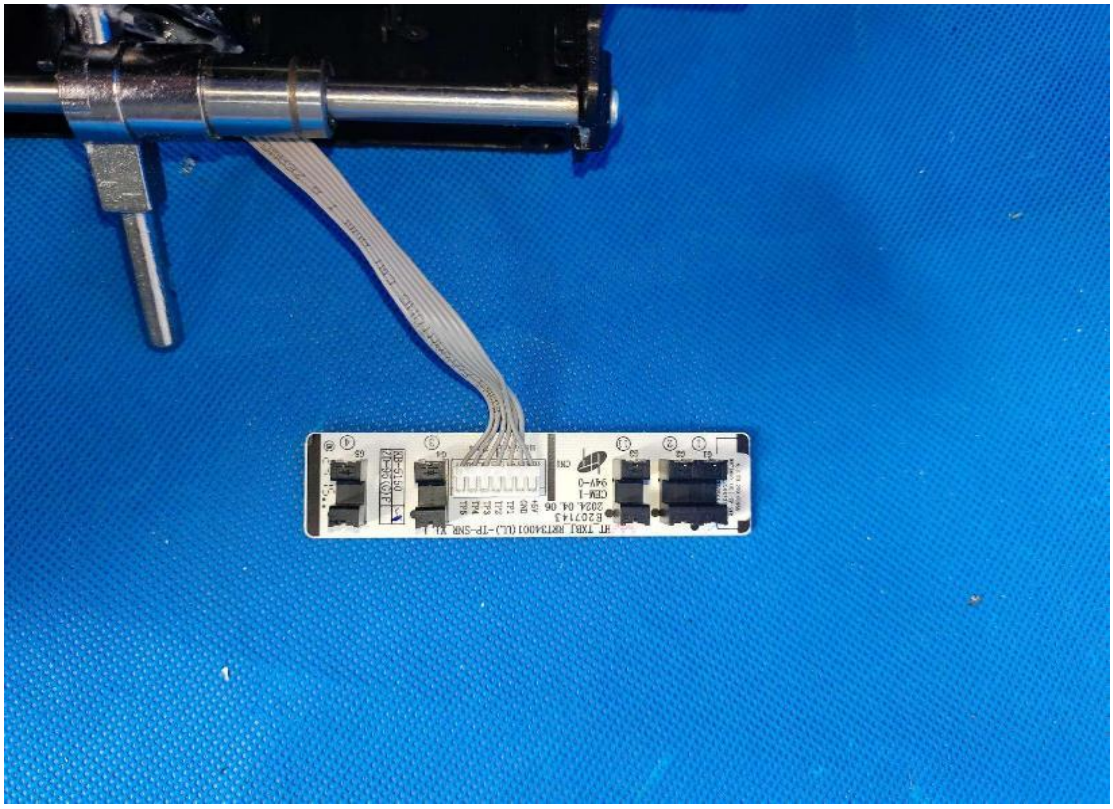

3.0 Product Photographs

Photo 23 - Internal view for model RRT34001


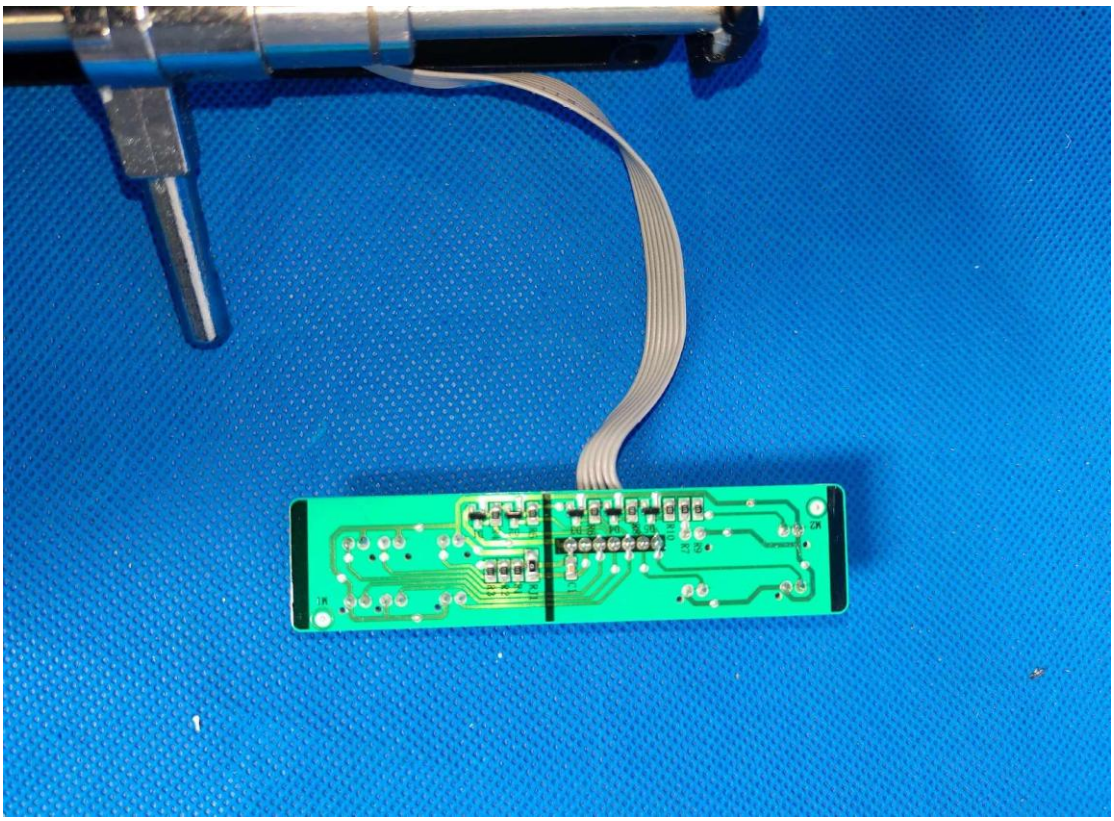


Photo 24 - Internal view for model RRT34001

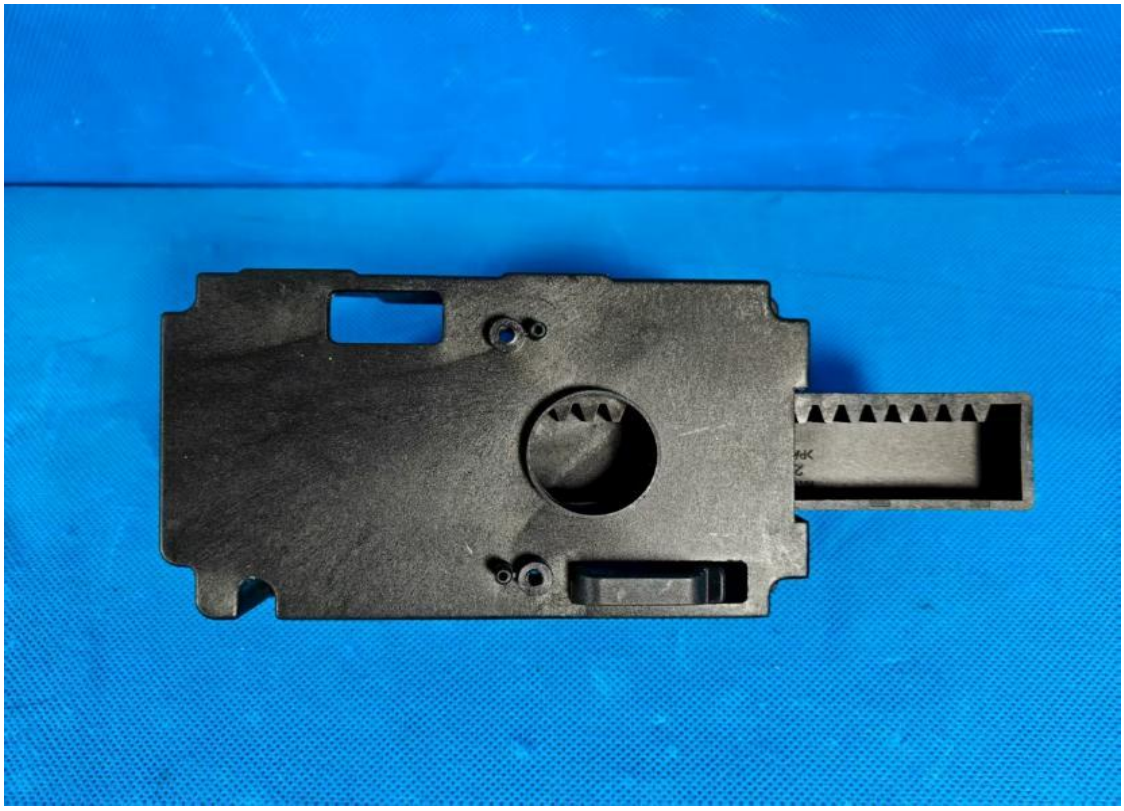

3.0 Product Photographs

Photo 25 - Internal view for model RRT34001


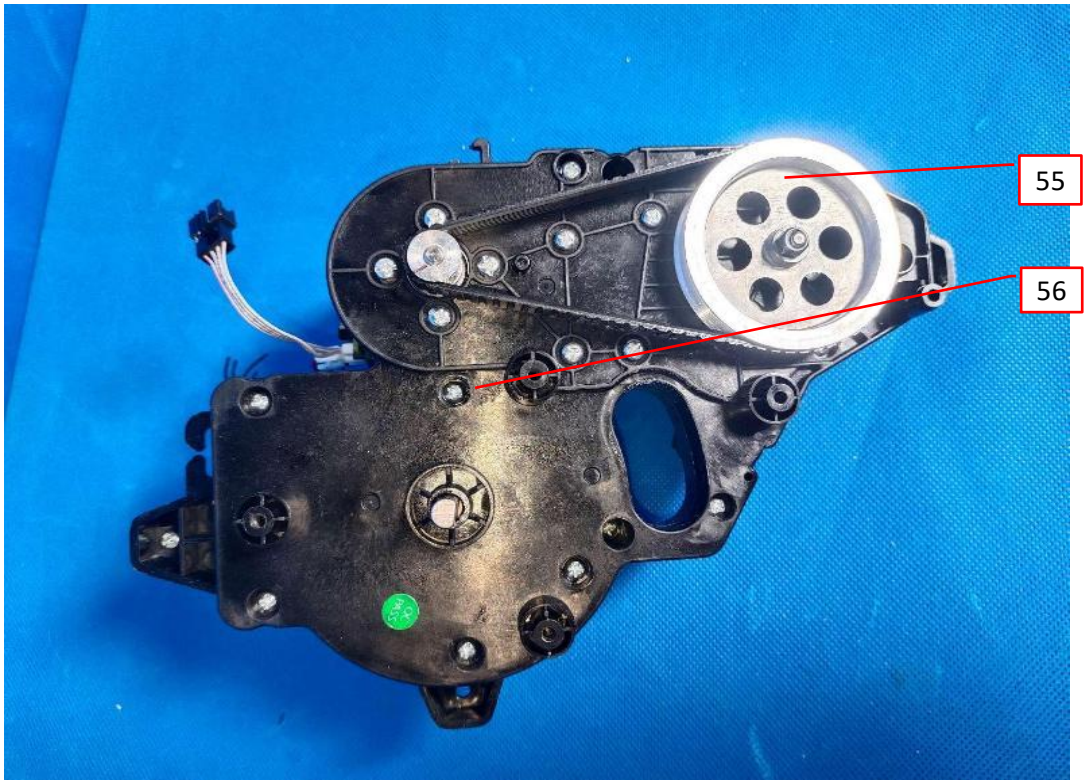


Photo 26 - Internal view for model RRT34001

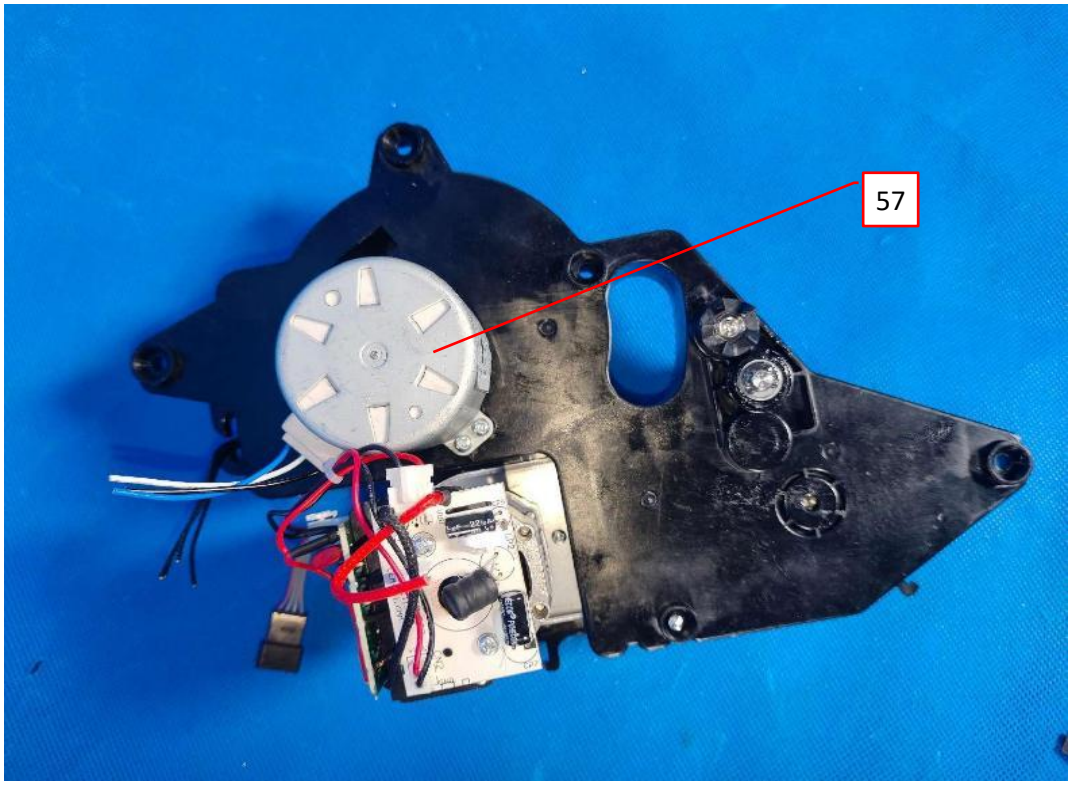

3.0 Product Photographs

Photo 27 - Internal view for model RRT34001


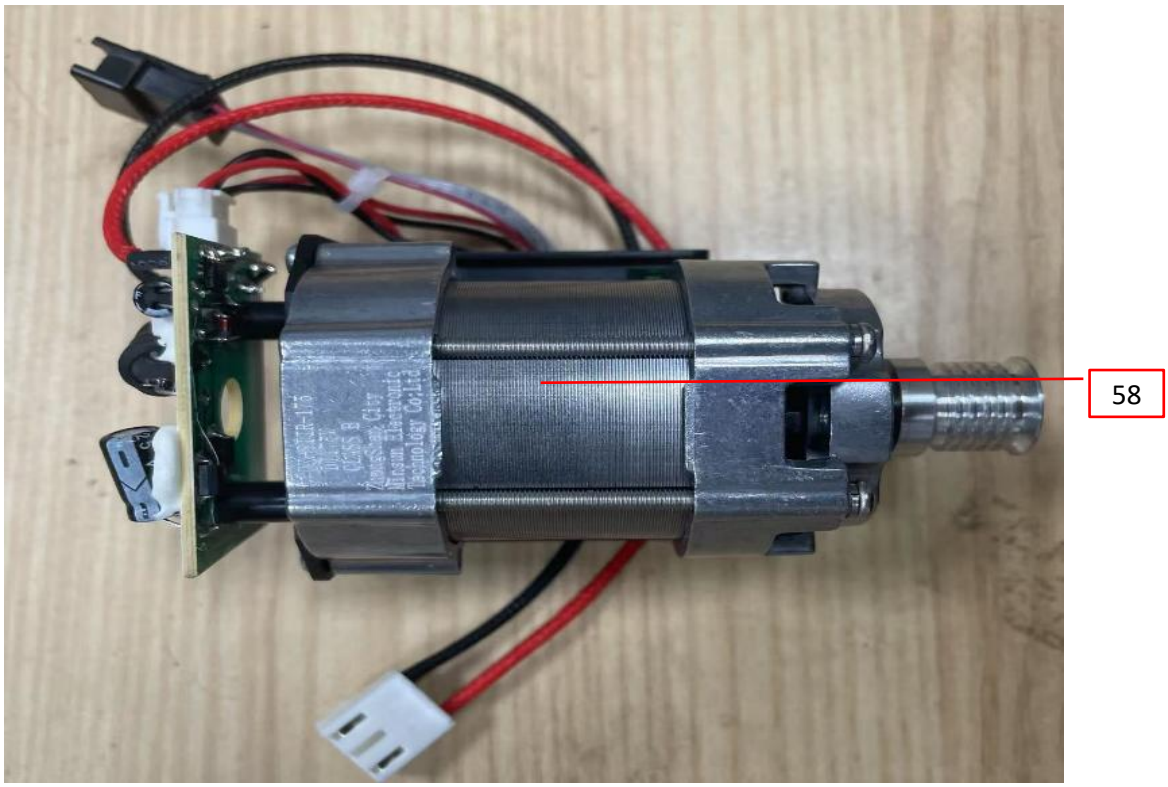


Photo 28 - Internal view for model RRT34001

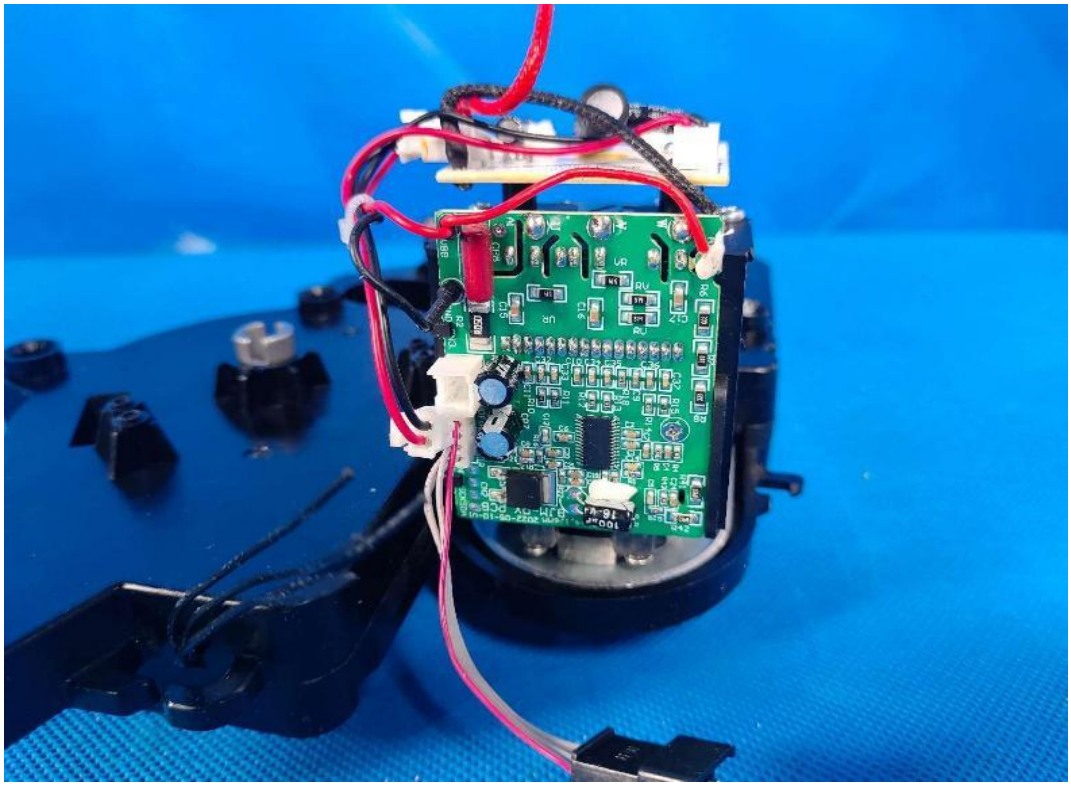

3.0 Product Photographs

Photo 29 - Internal view for model RRT34001


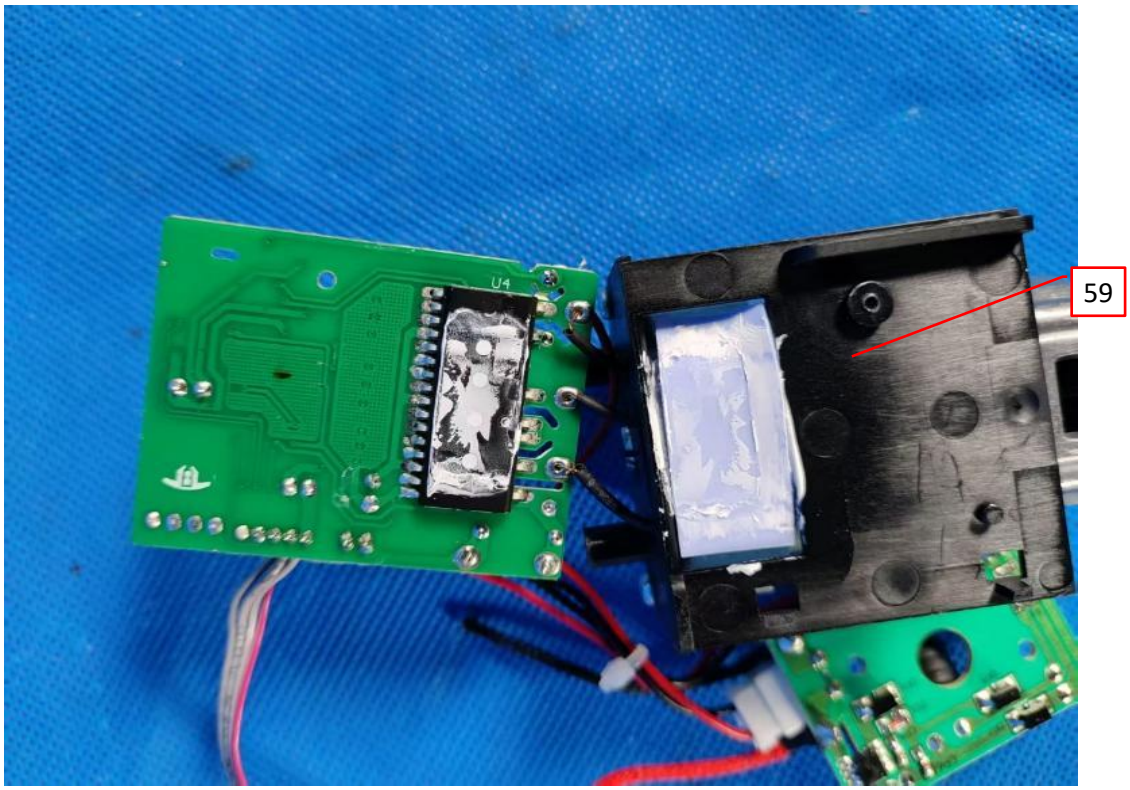


Photo 30 - Internal view for model RRT34001

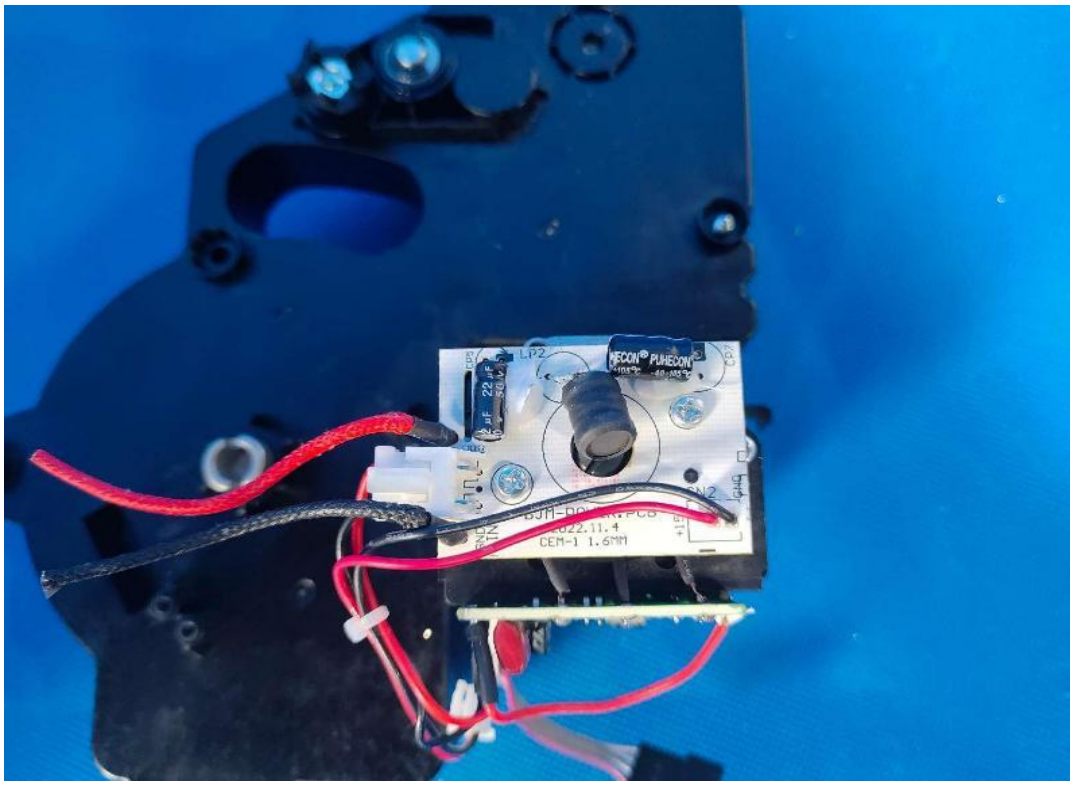

3.0 Product Photographs

Photo 31 - Internal view for model RRT34001


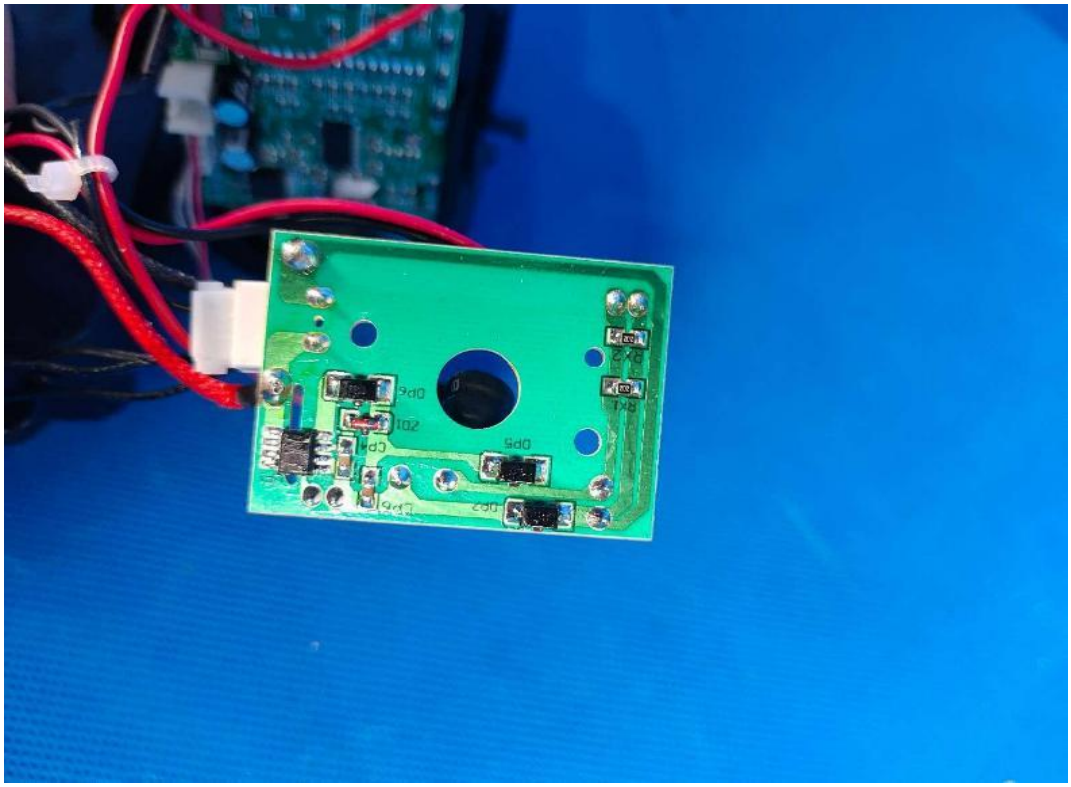


Photo 32 - Internal view for model RRT34001

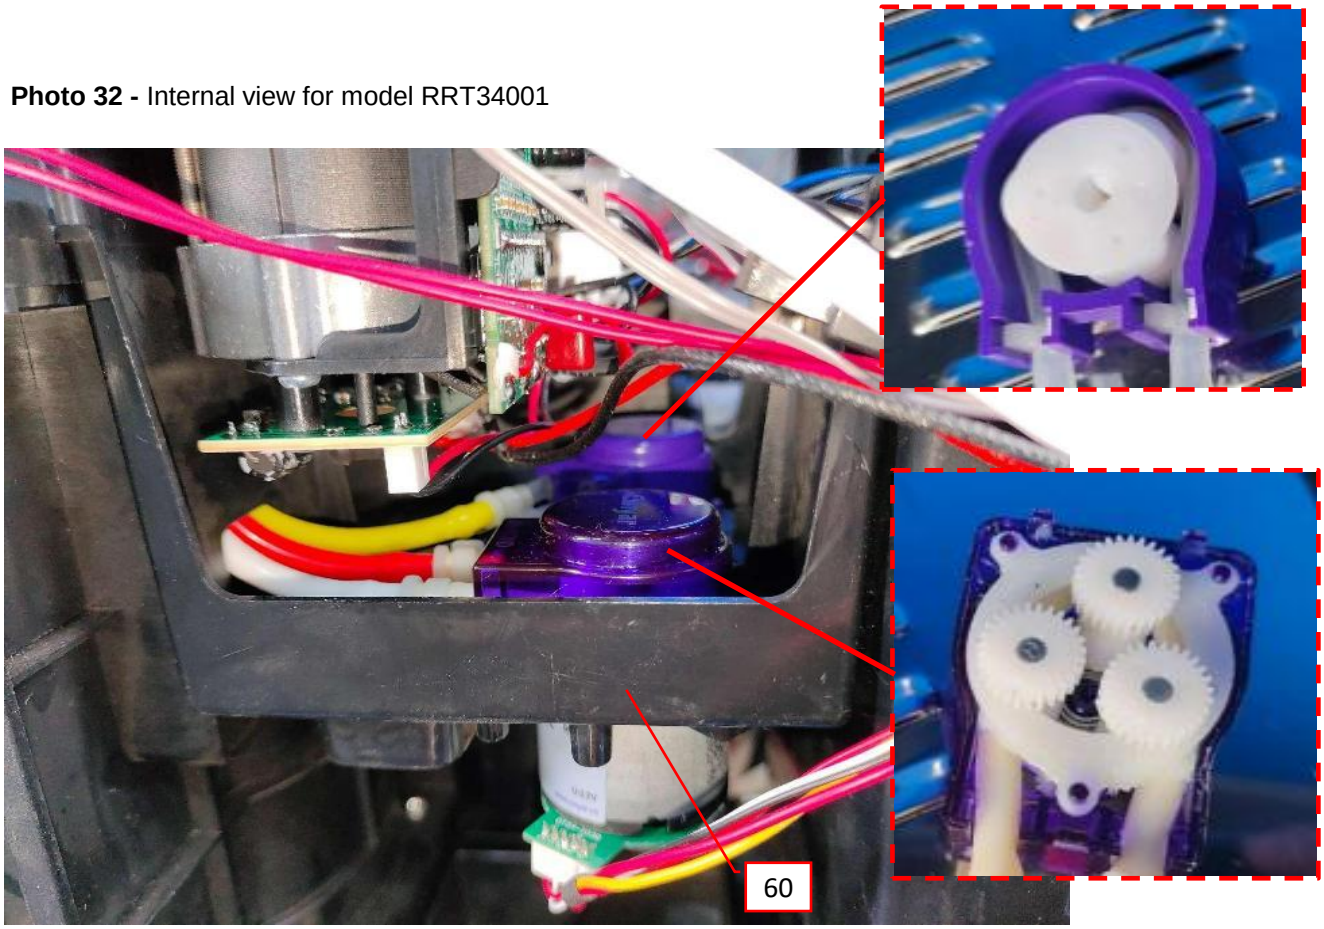

3.0 Product Photographs

Photo 33 - Internal view for model RRT34001


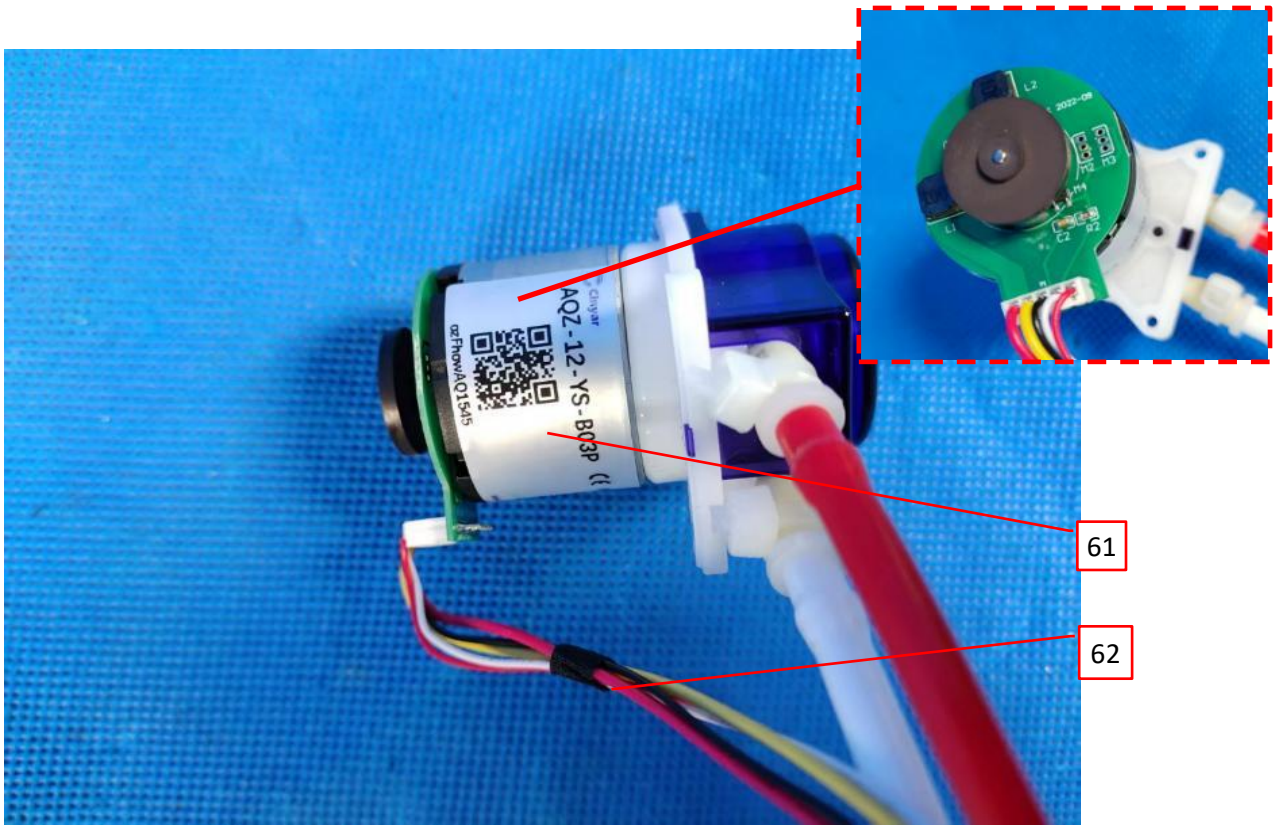


Photo 34 - Internal view for model RRT34001

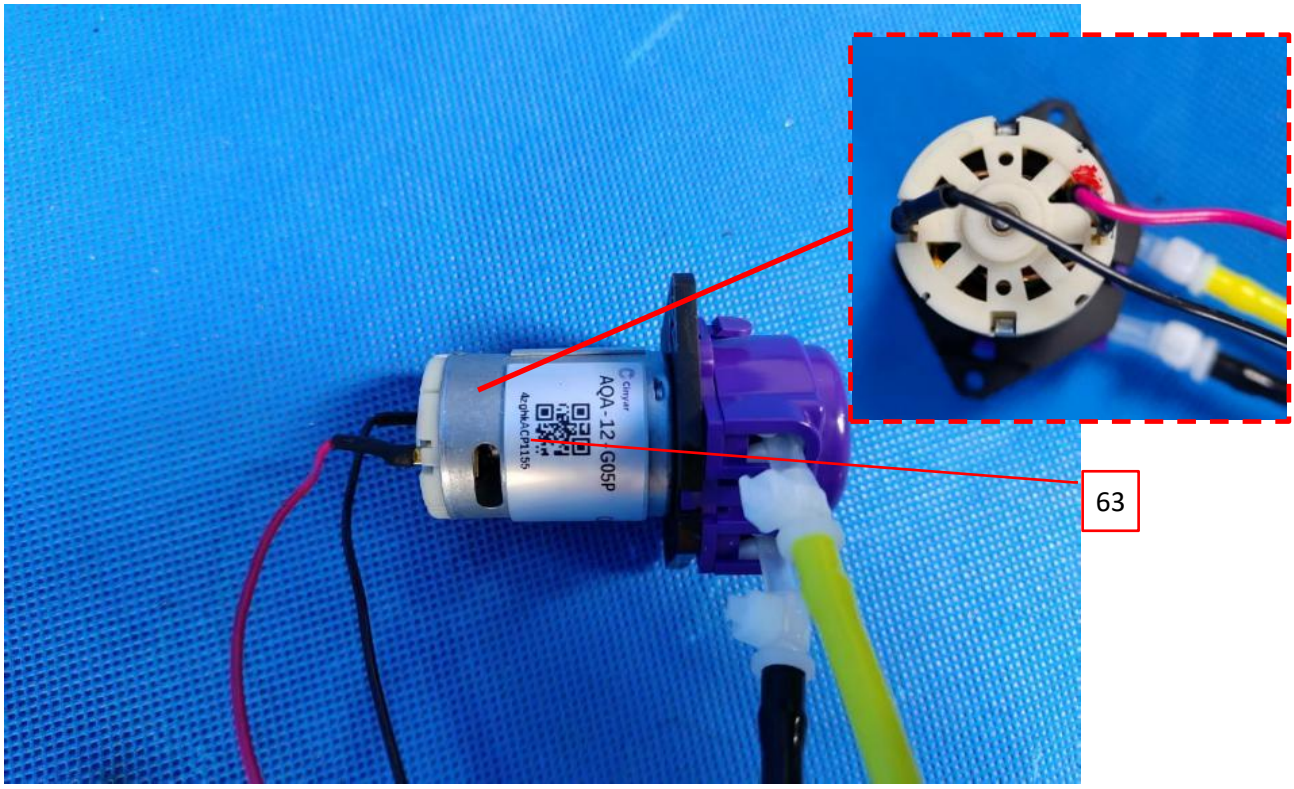

3.0 Product Photographs

Photo 35 - Internal view for model RRT34001


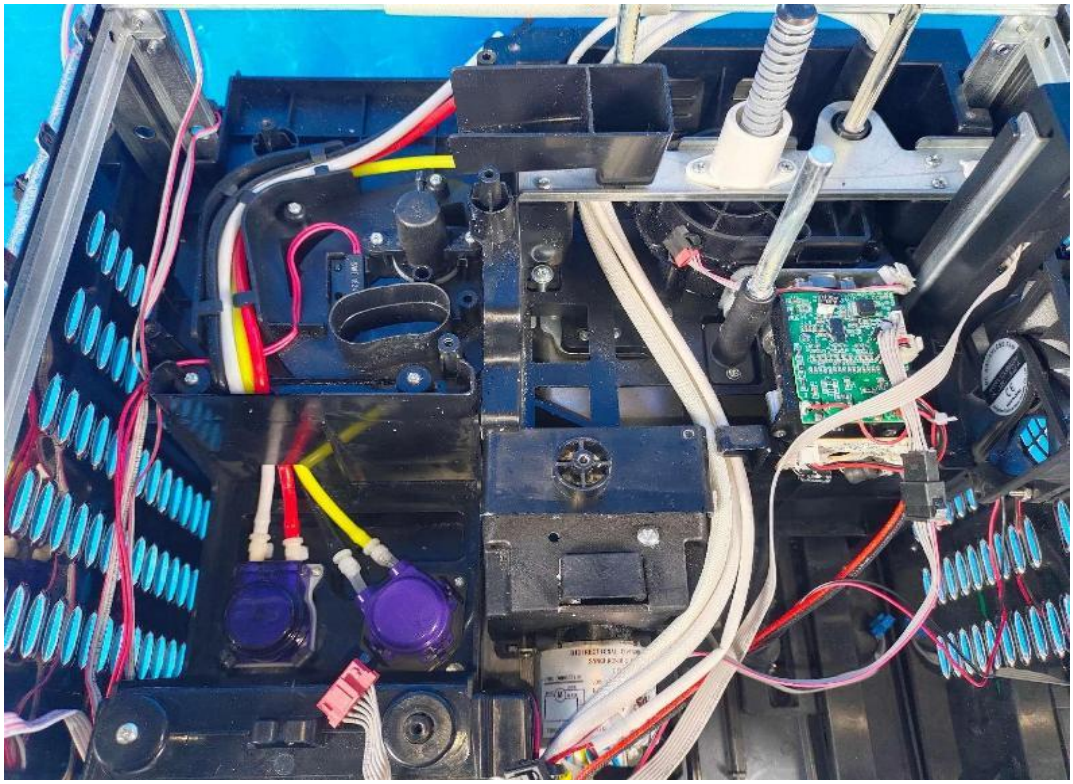


Photo 36 - Internal view for model RRT34001

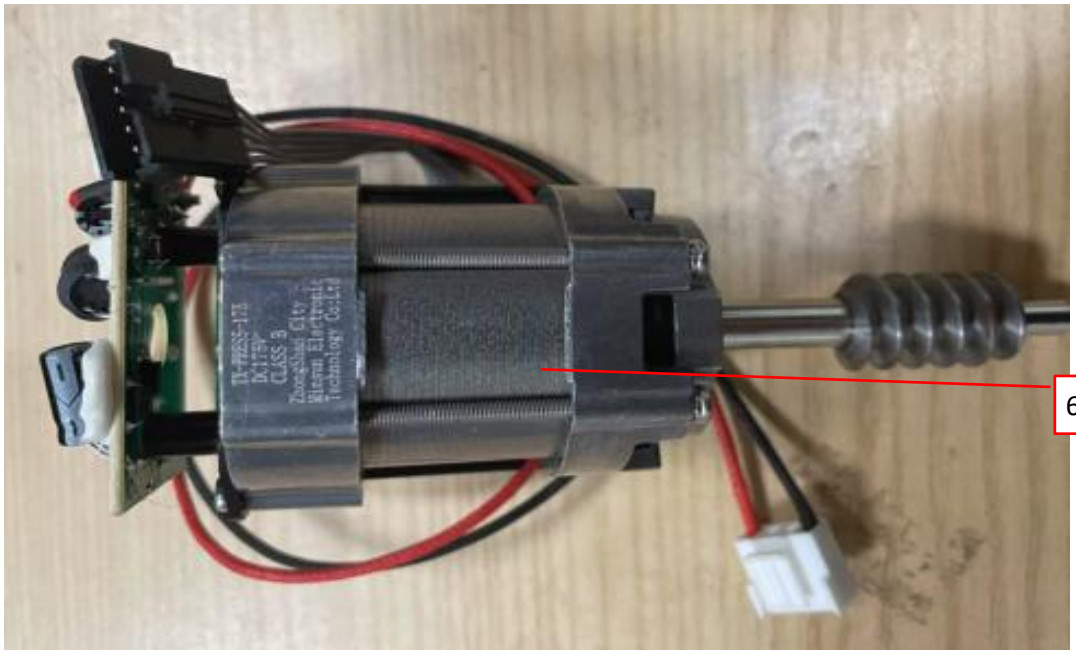

3.0 Product Photographs

Photo 37 - Internal view for model RRT34001


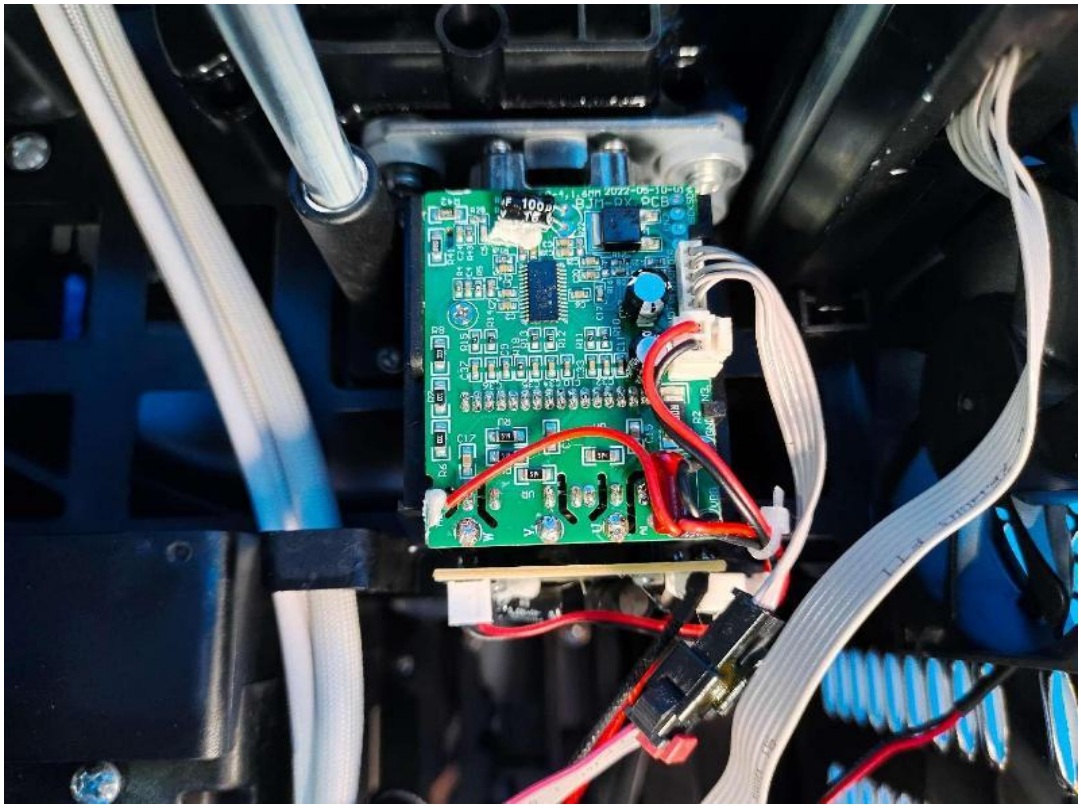


Photo 38 - Internal view for model RRT34001

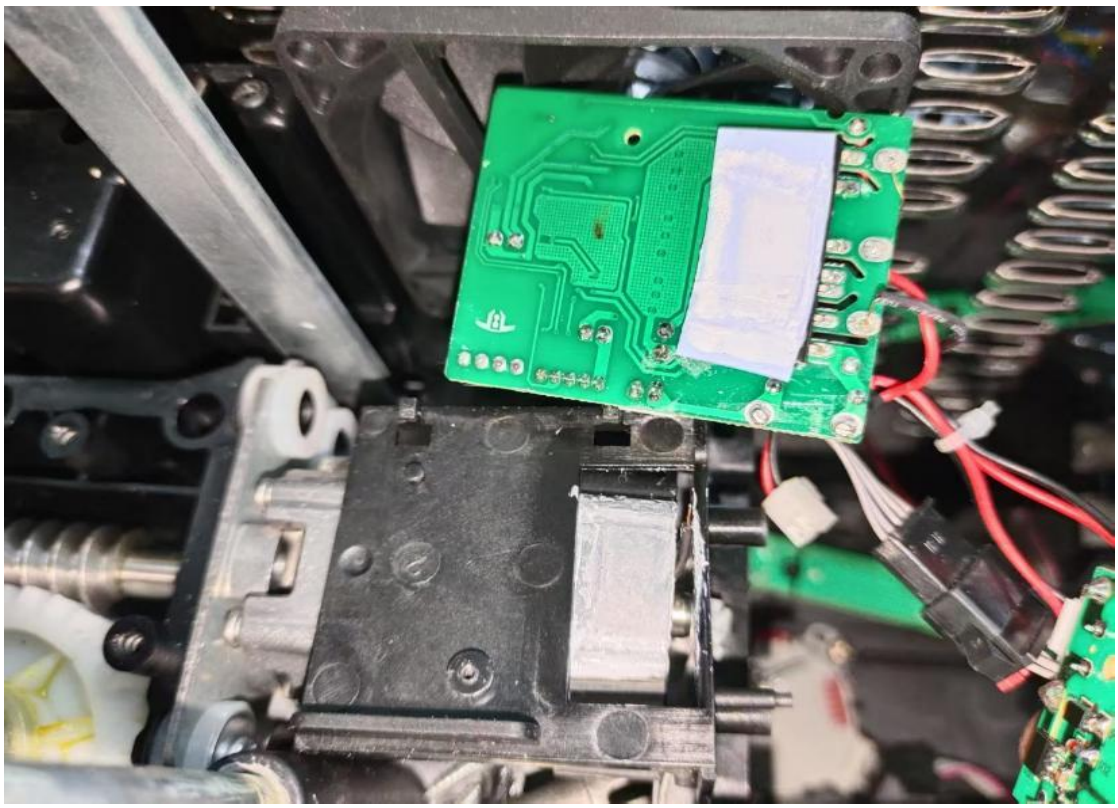

3.0 Product Photographs

Photo 39 - Internal view for model RRT34001


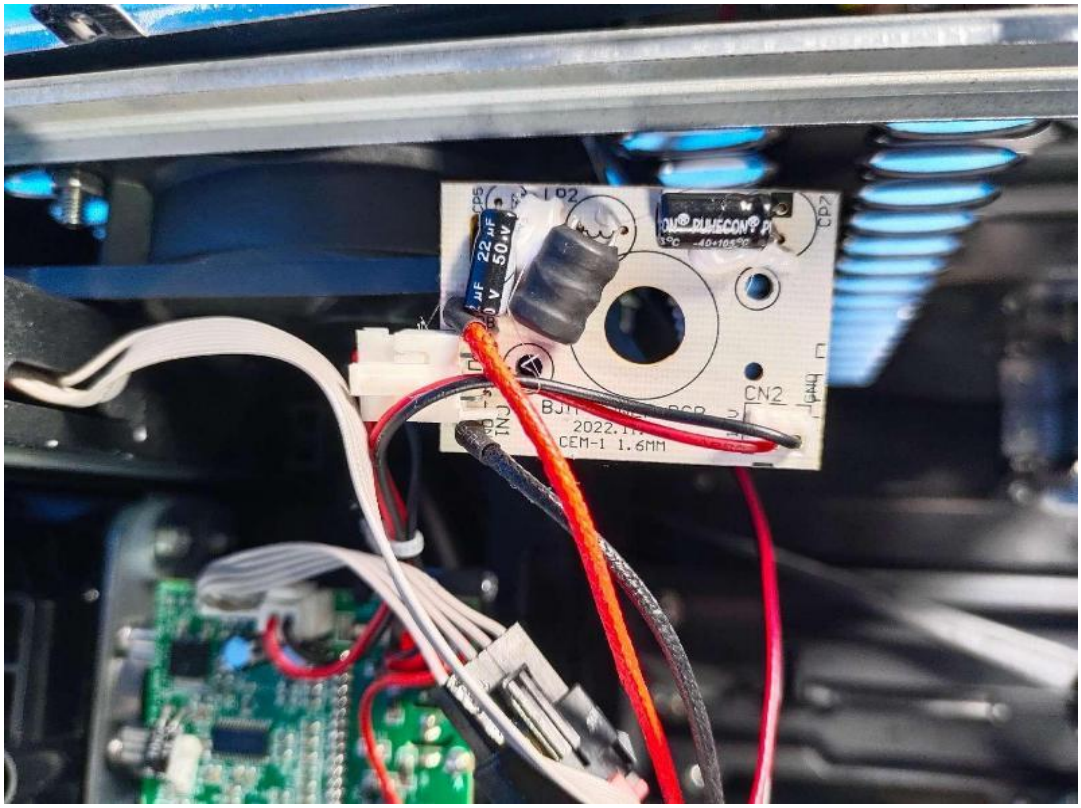


Photo 40 - Internal view for model RRT34001

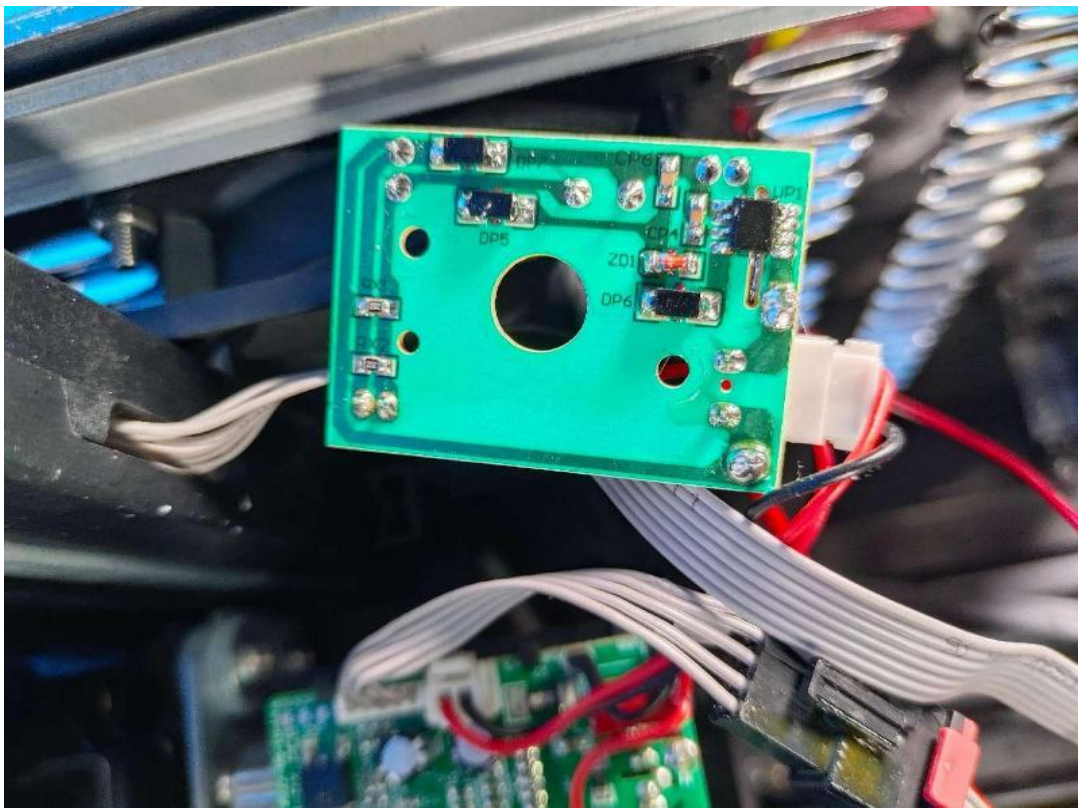

3.0 Product Photographs

Photo 41 - Internal view for model RRT34001


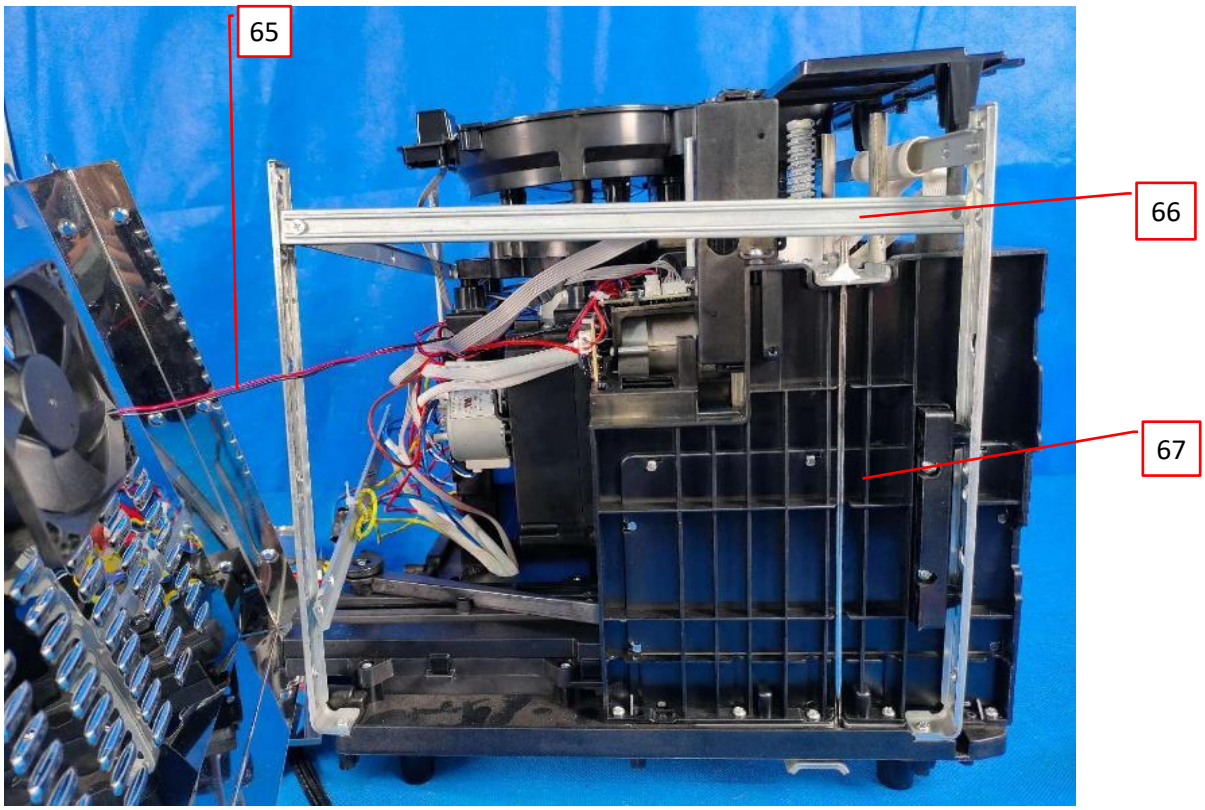


Photo 42 - Internal view for model RRT34001

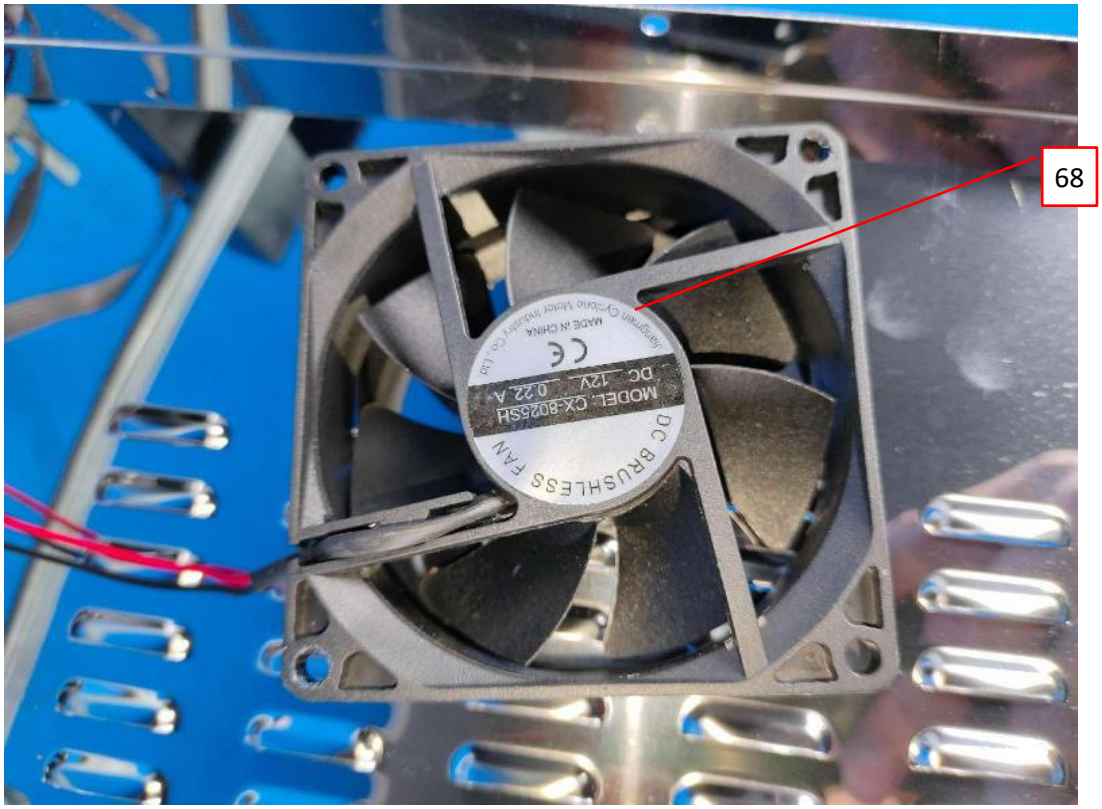

3.0 Product Photographs

Photo 43 - Internal view for model RRT34001


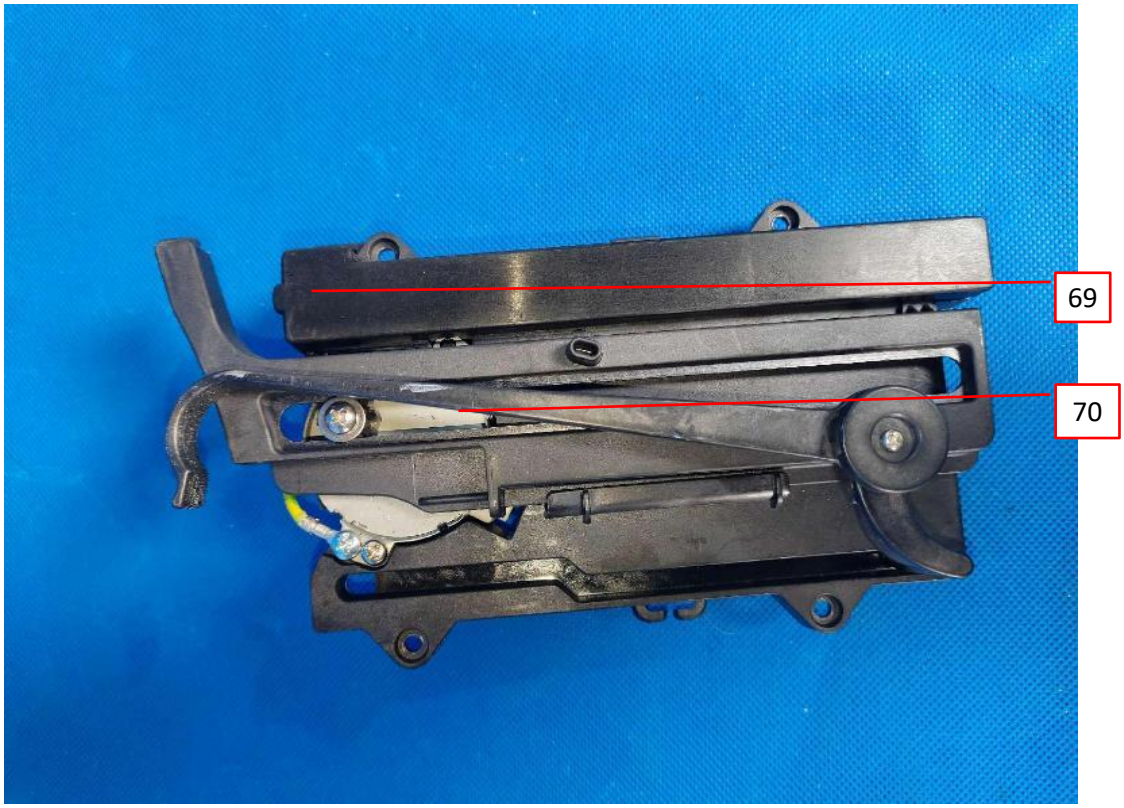


Photo 44 - Internal view for model RRT34001

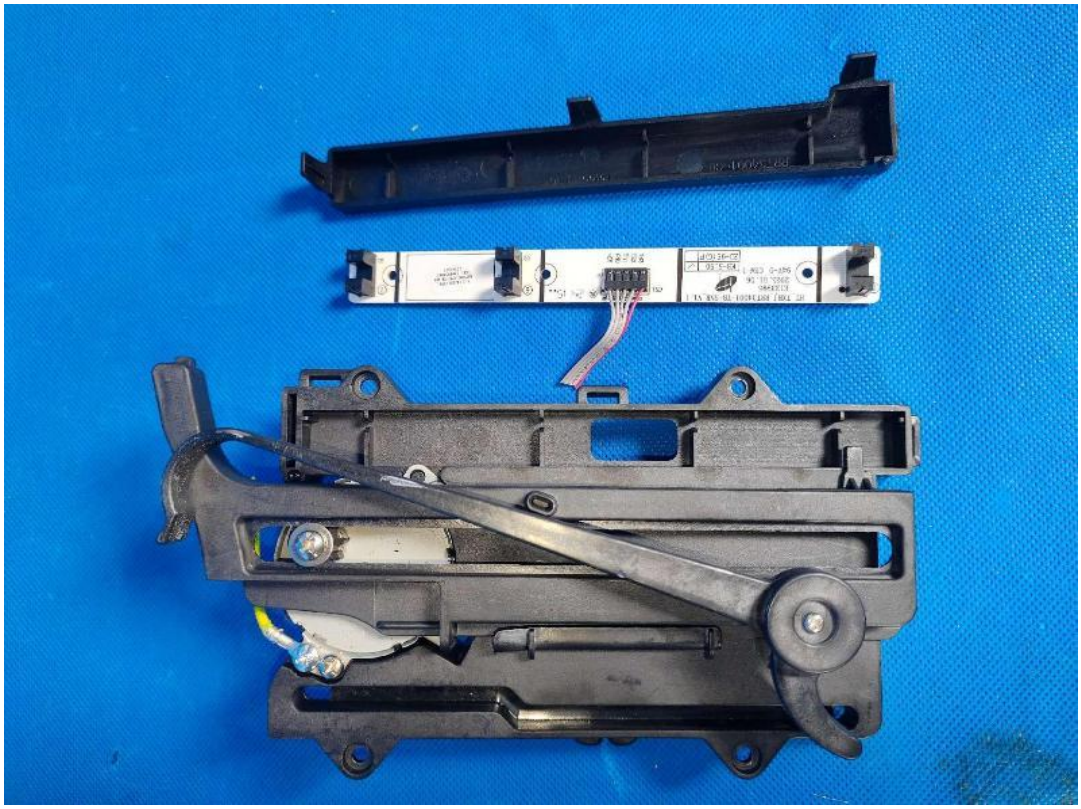

3.0 Product Photographs

Photo 45 - Internal view for model RRT34001


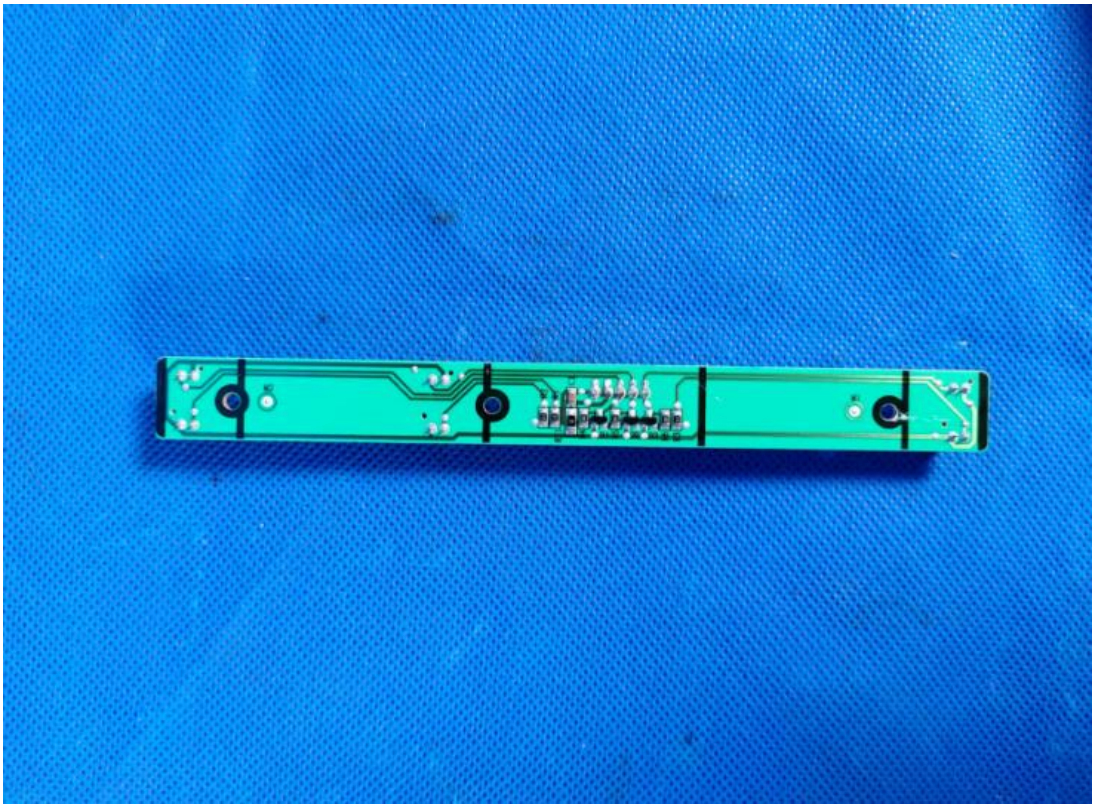


Photo 46 - Internal view for model RRT34001

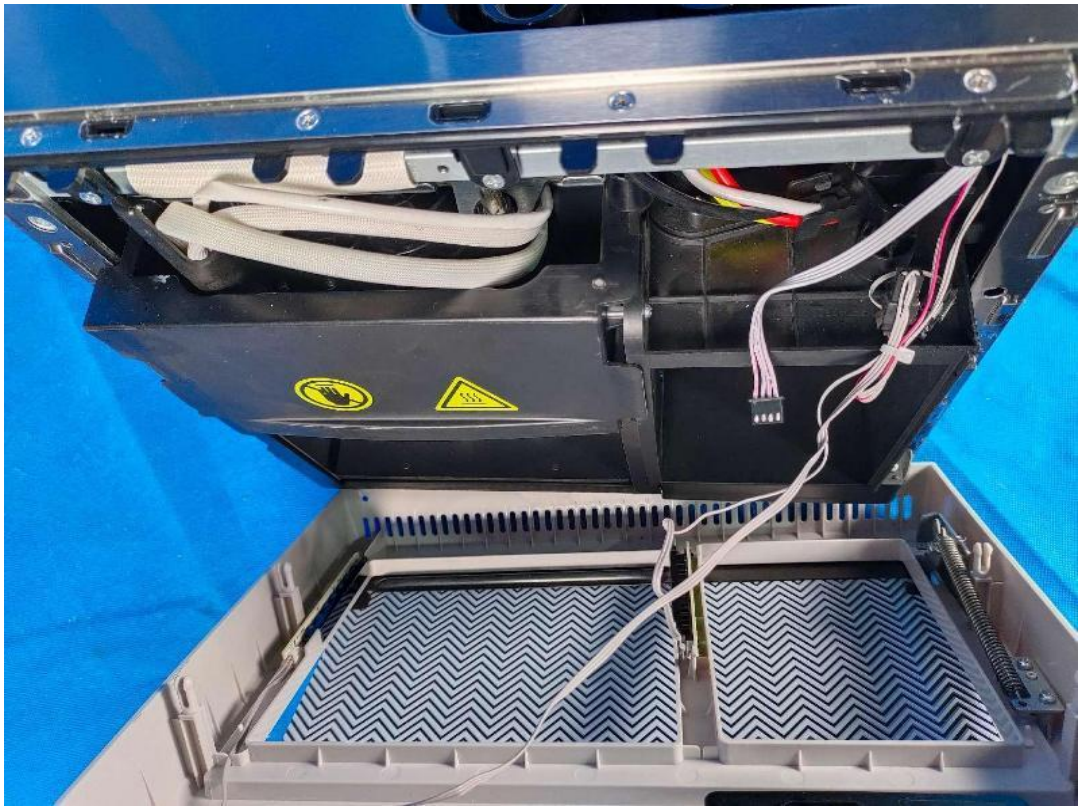


3.0 Product Photographs

Photo 47 - Internal view for model RRT34001



Photo 48 - Internal view for model RRT34001

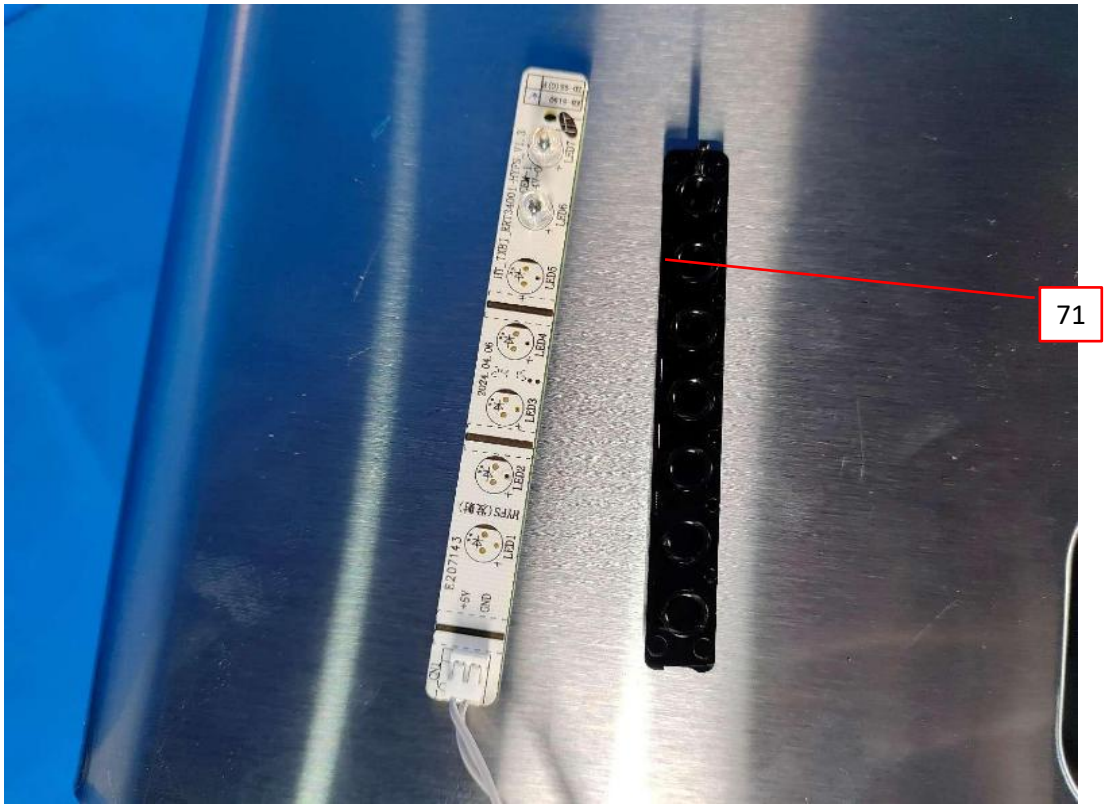

3.0 Product Photographs

Photo 49 - Internal view for model RRT34001


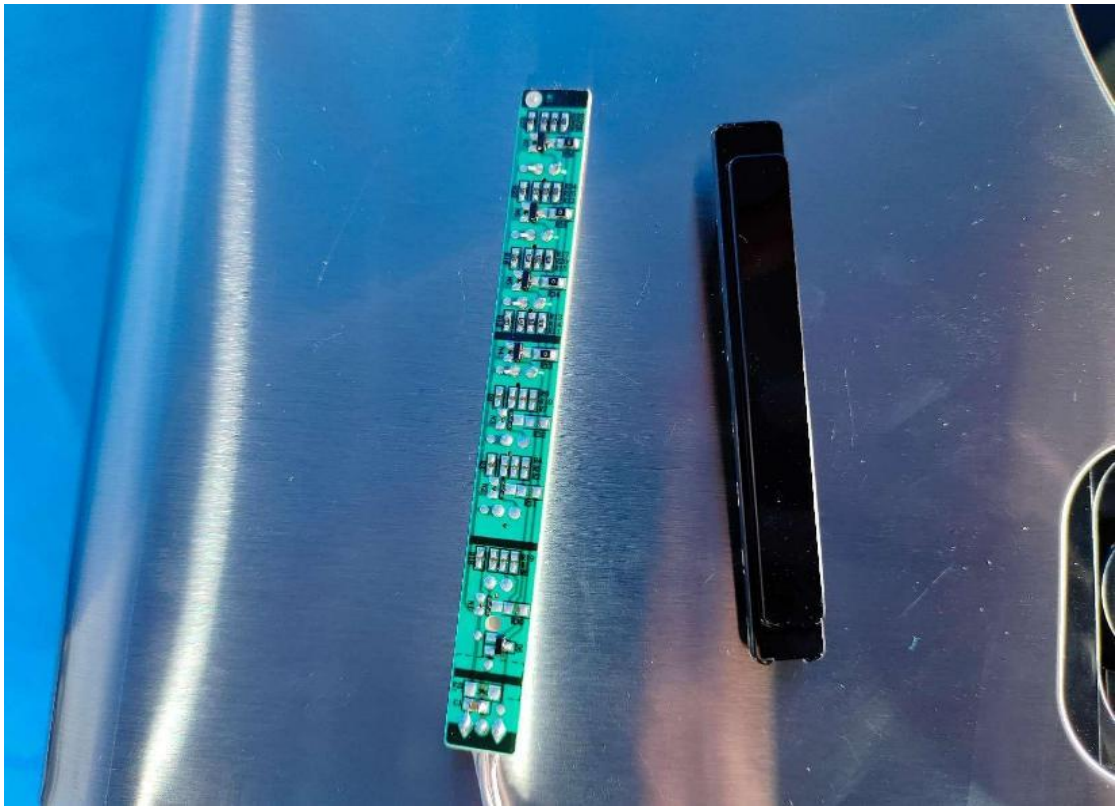


Photo 50 - Internal view for model RRT34001

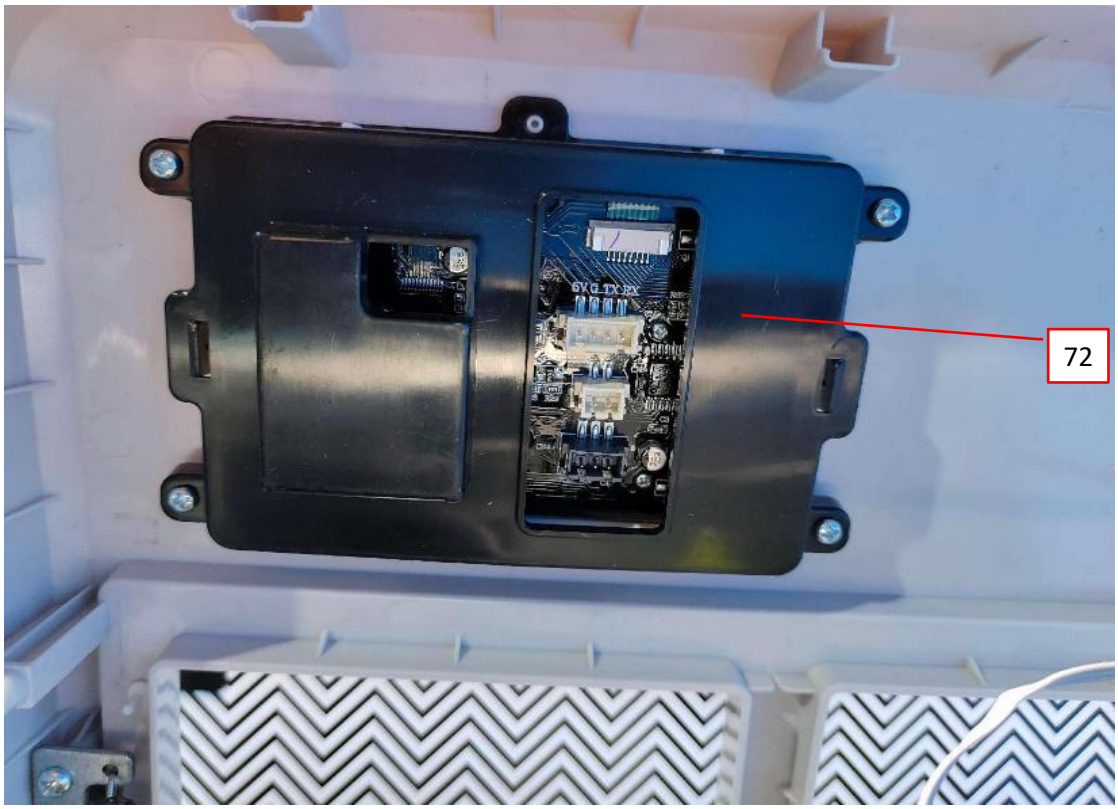

3.0 Product Photographs

Photo 51 - Internal view for model RRT34001

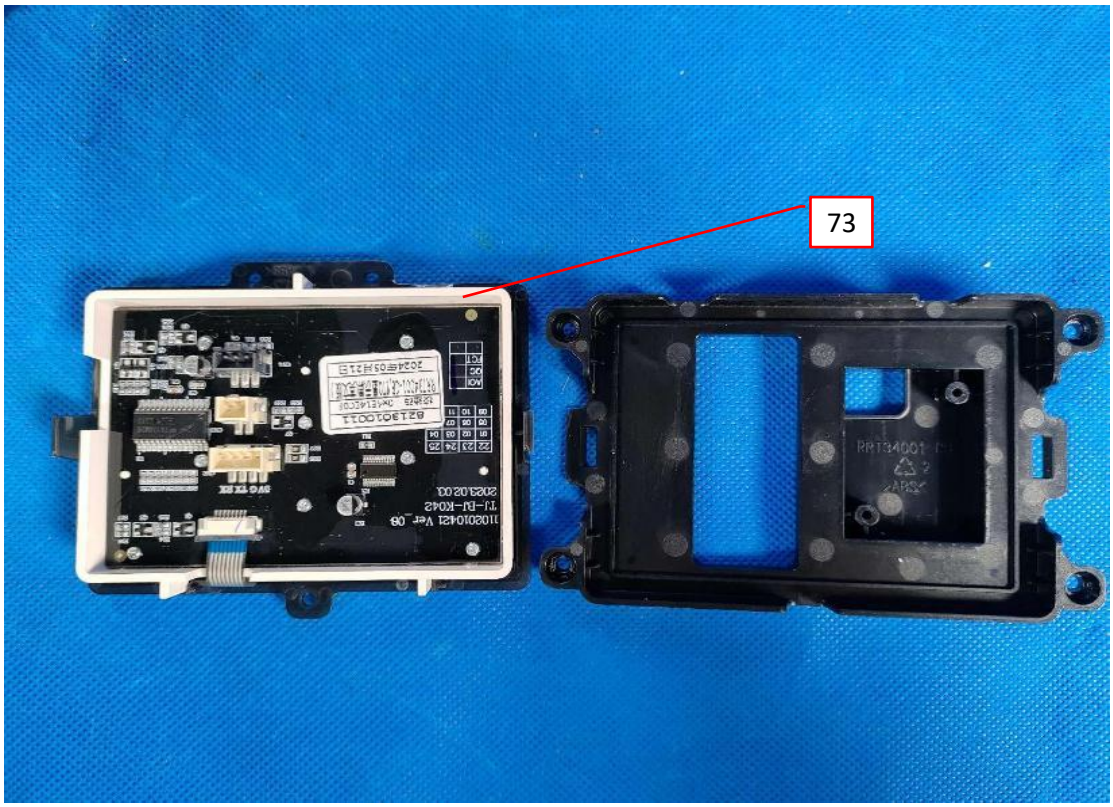


Photo 52 - Internal view for model RRT34001



3.0 Product Photographs

Photo 53 - Internal view for model RRT34001

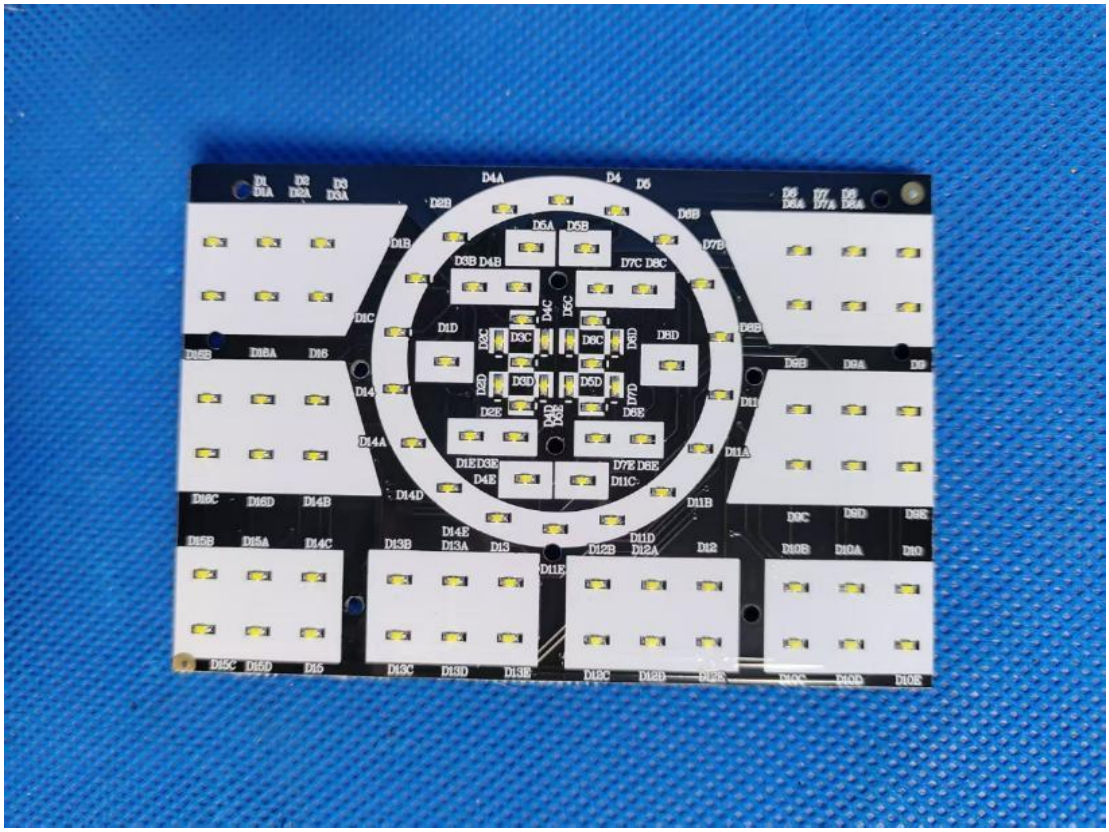


Photo 54 - Internal view for model RRT34001



3.0 Product Photographs

Photo 55 - Internal view for model RRT34001


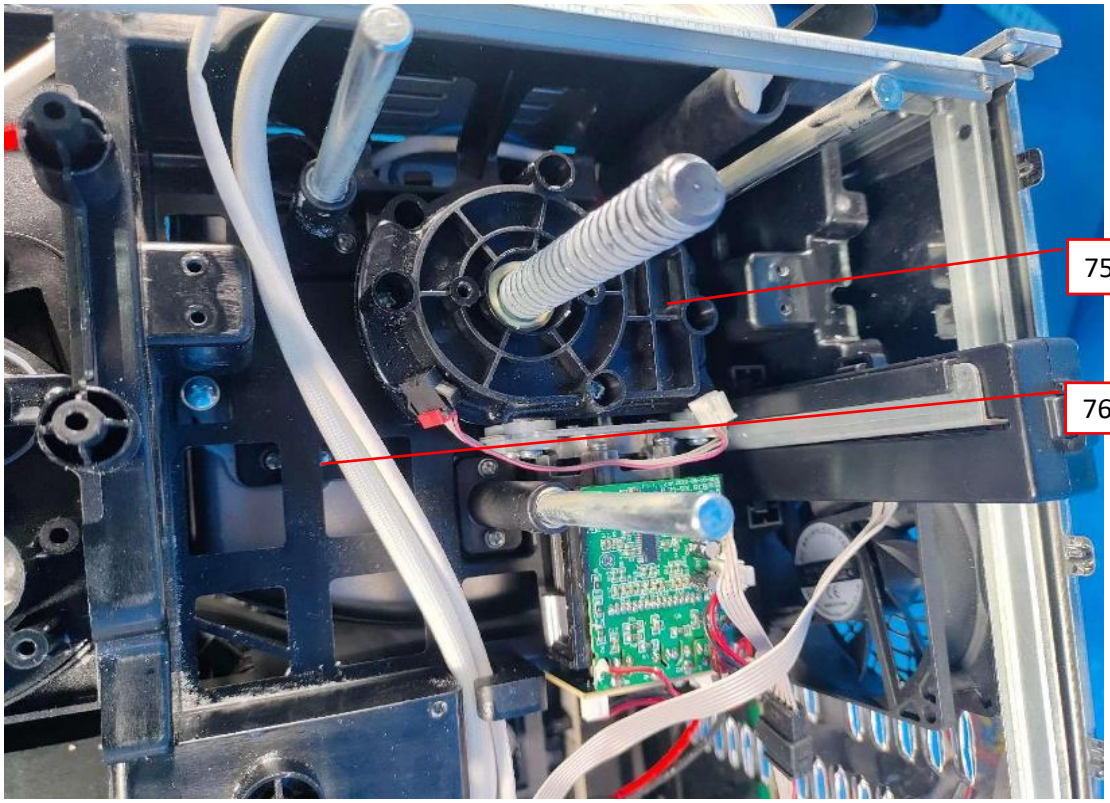


Photo 56 - Internal view for model RRT34001

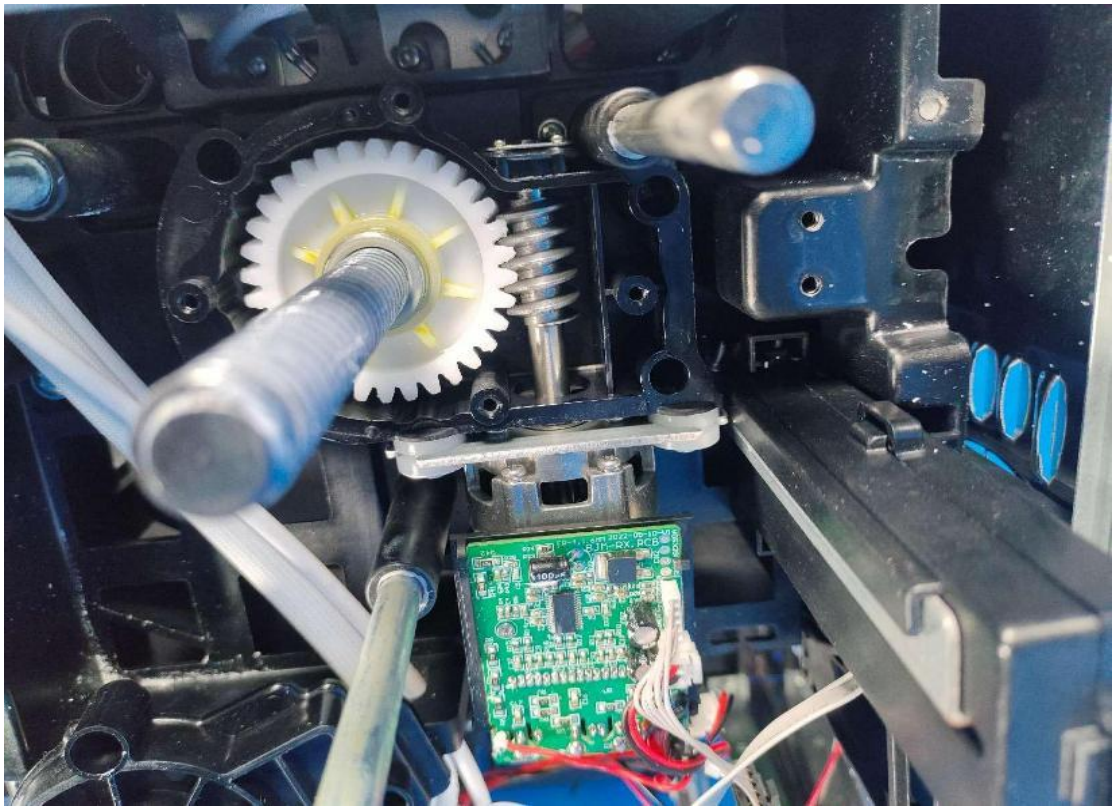

3.0 Product Photographs

Photo 57 - Internal view for model RRT34001


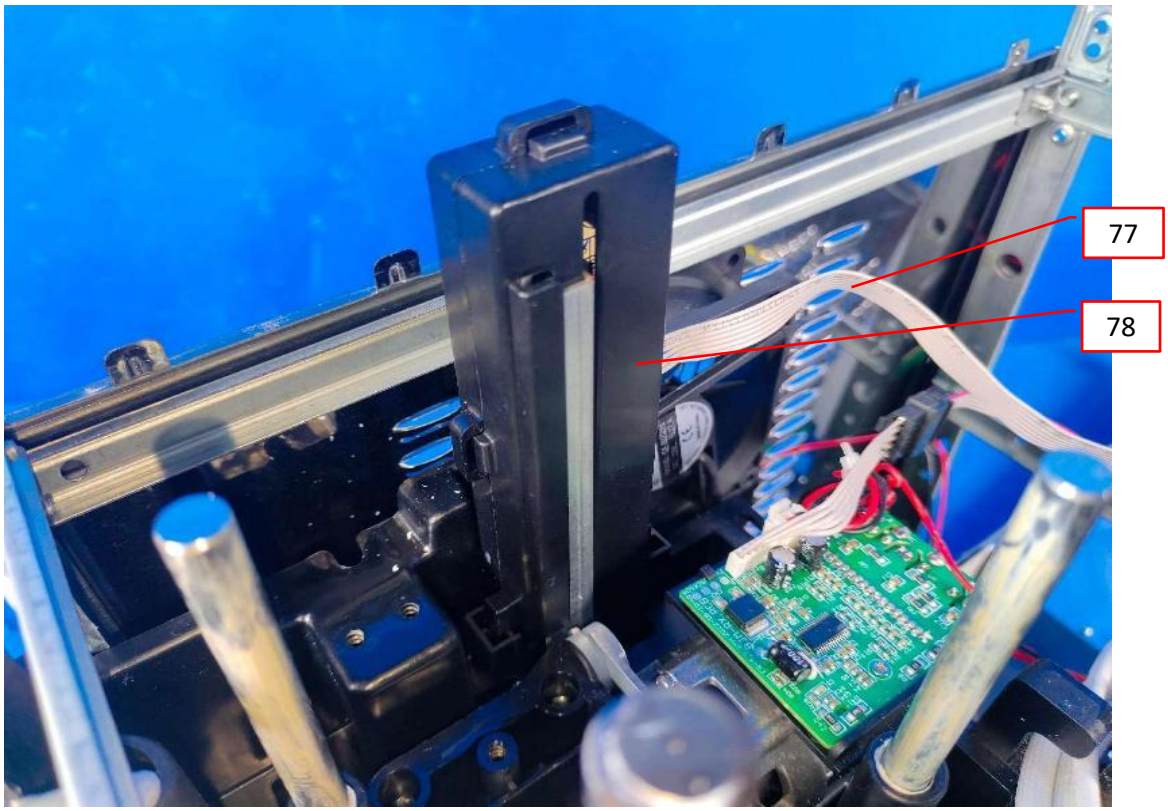


Photo 58 - Internal view for model RRT34001

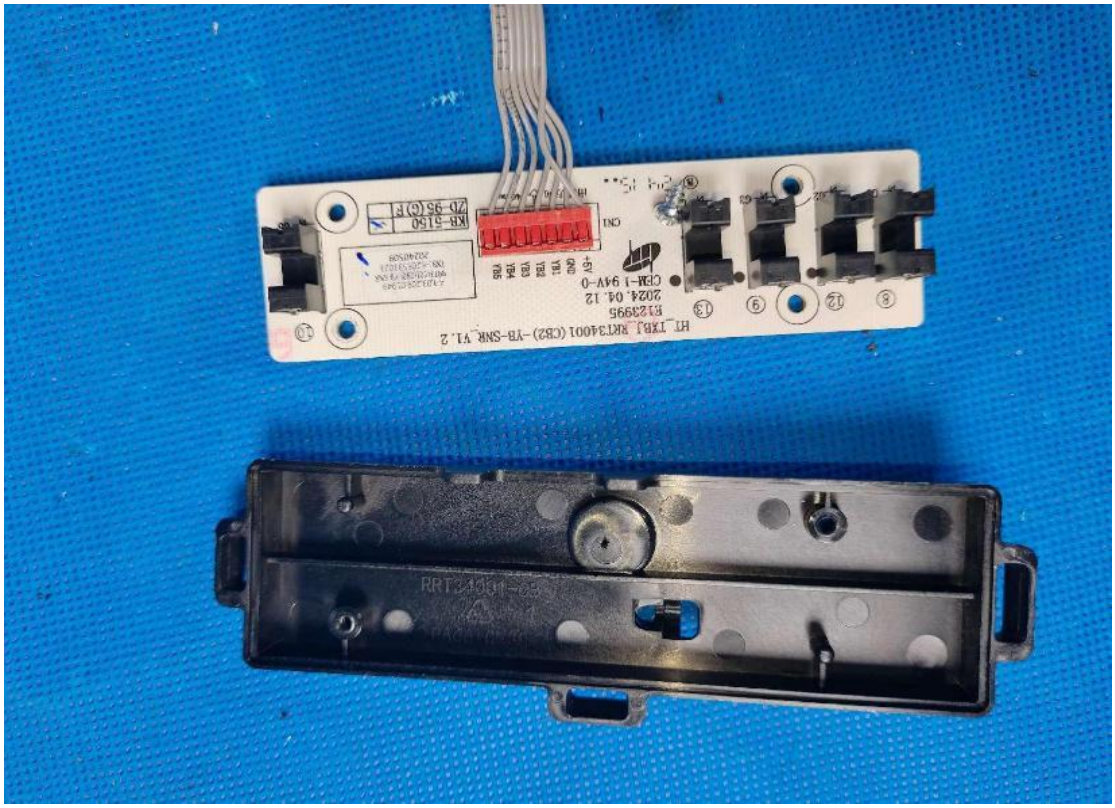

3.0 Product Photographs

Photo 59 - Internal view for model RRT34001


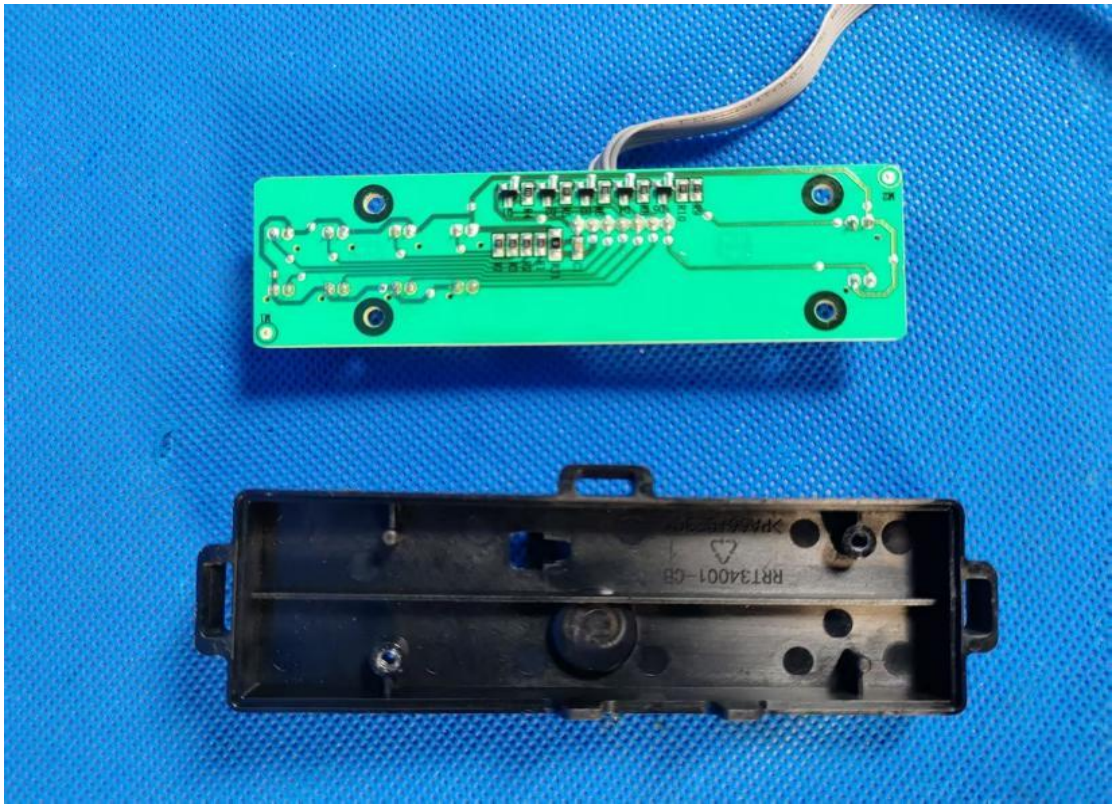


Photo 60 - Internal view for model RRT34001

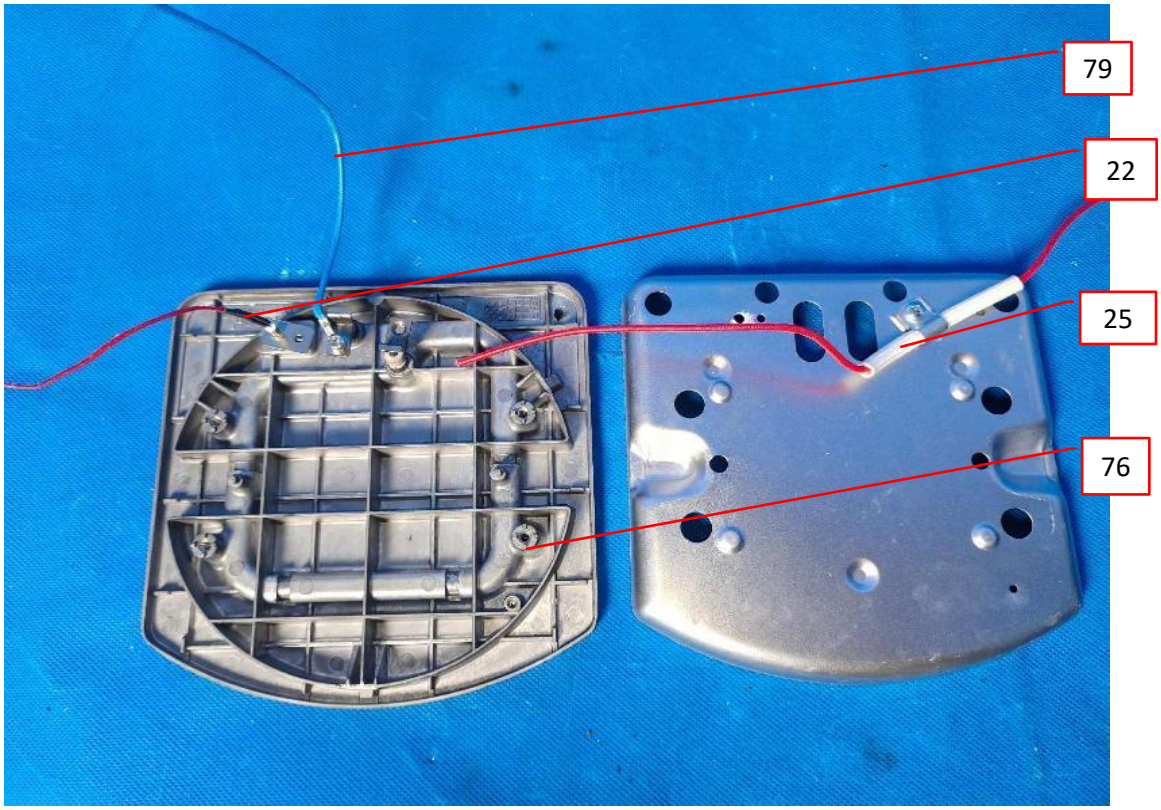

3.0 Product Photographs

Photo 61 - Internal view for model RRT34001


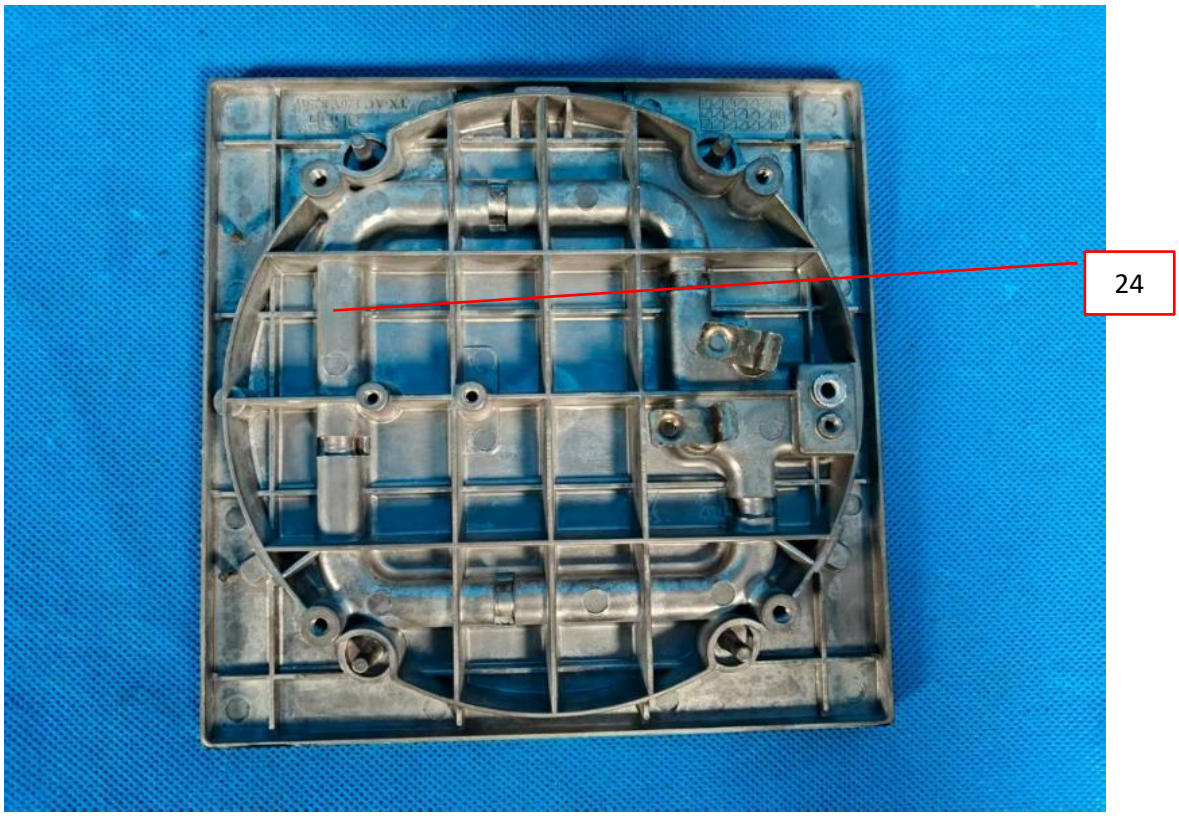


Photo 62 - Internal view for model RRT34001

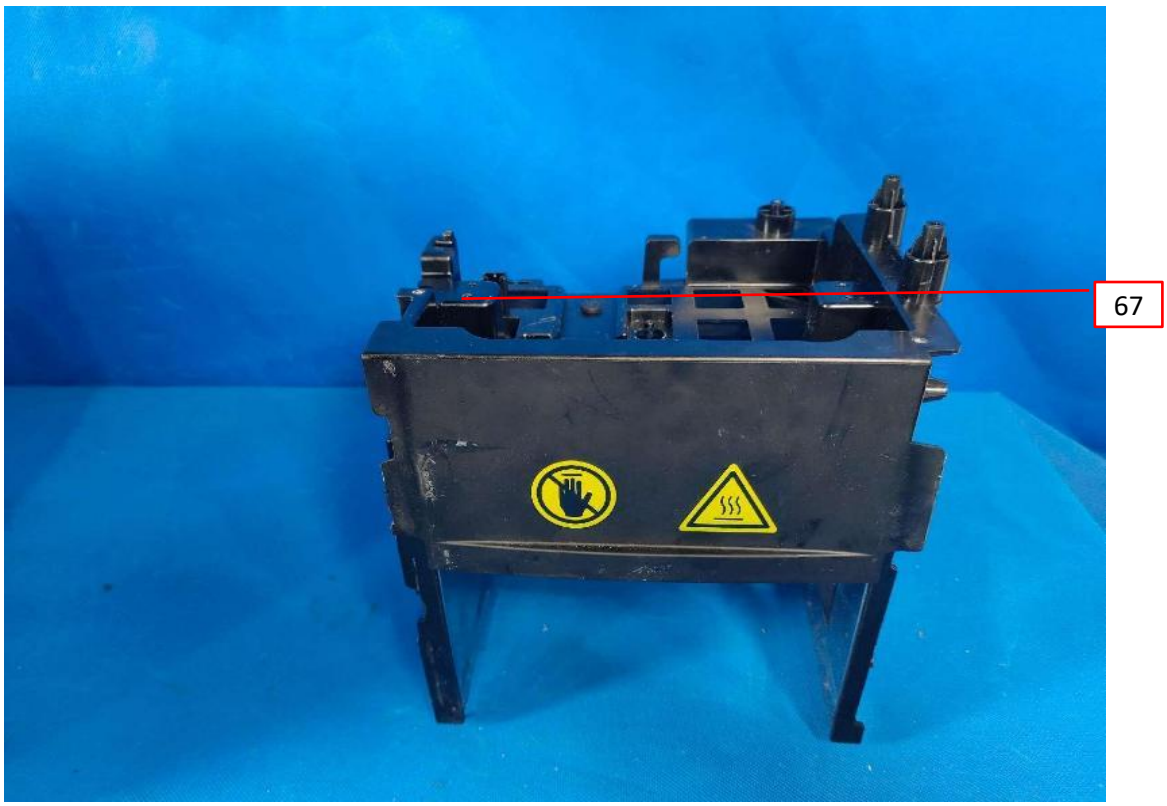

3.0 Product Photographs

Photo 63 - Internal view for model RRT34001


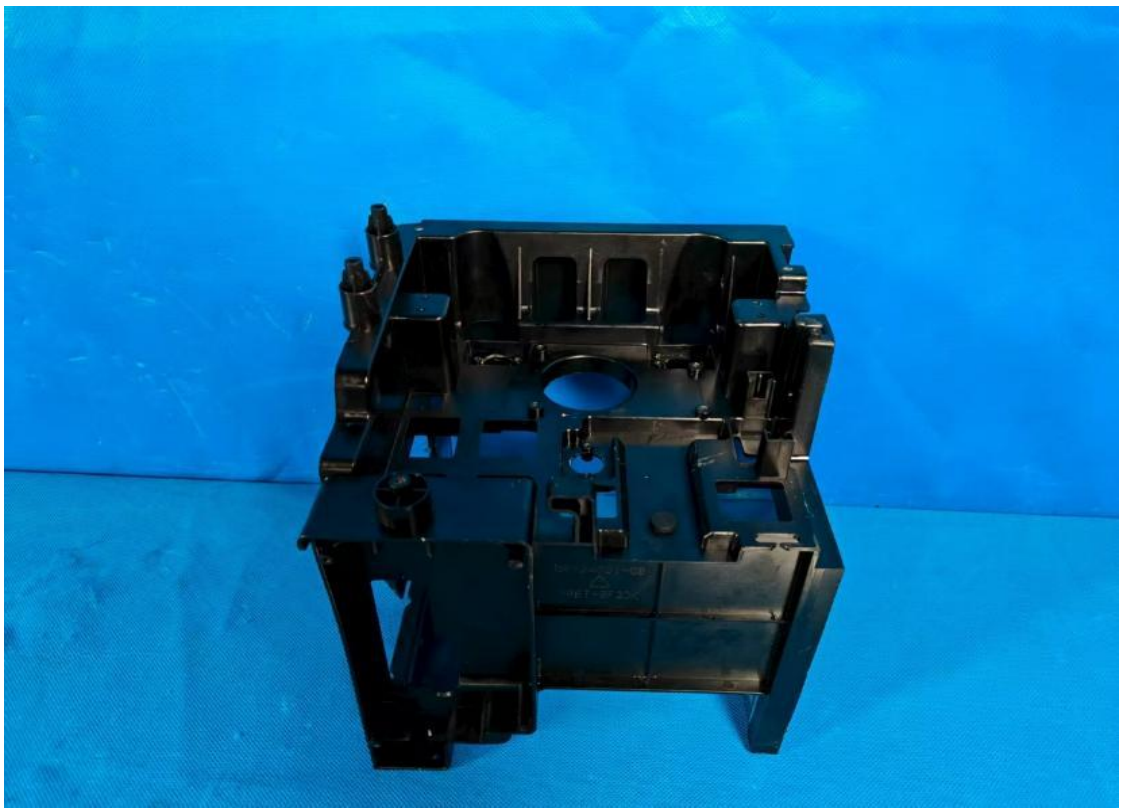


Photo 64 - Internal view for model RRT34001

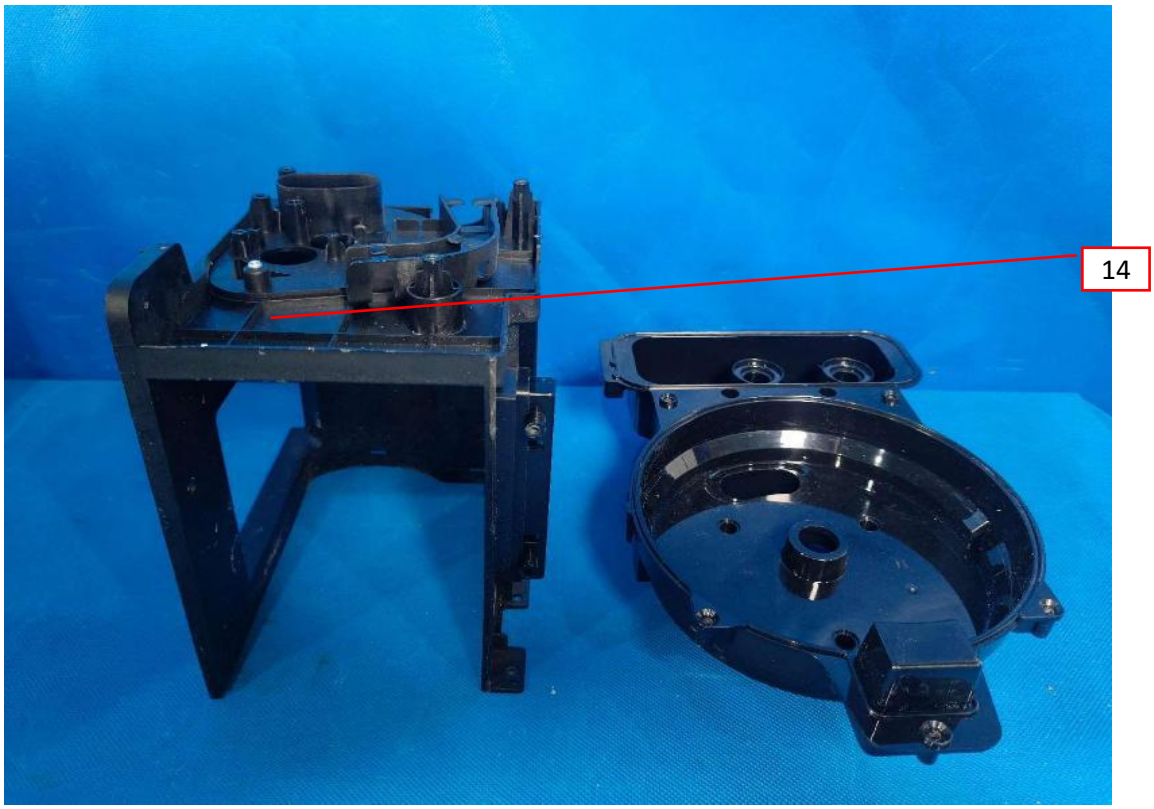

3.0 Product Photographs

Photo 65 - Internal view for model RRT34001

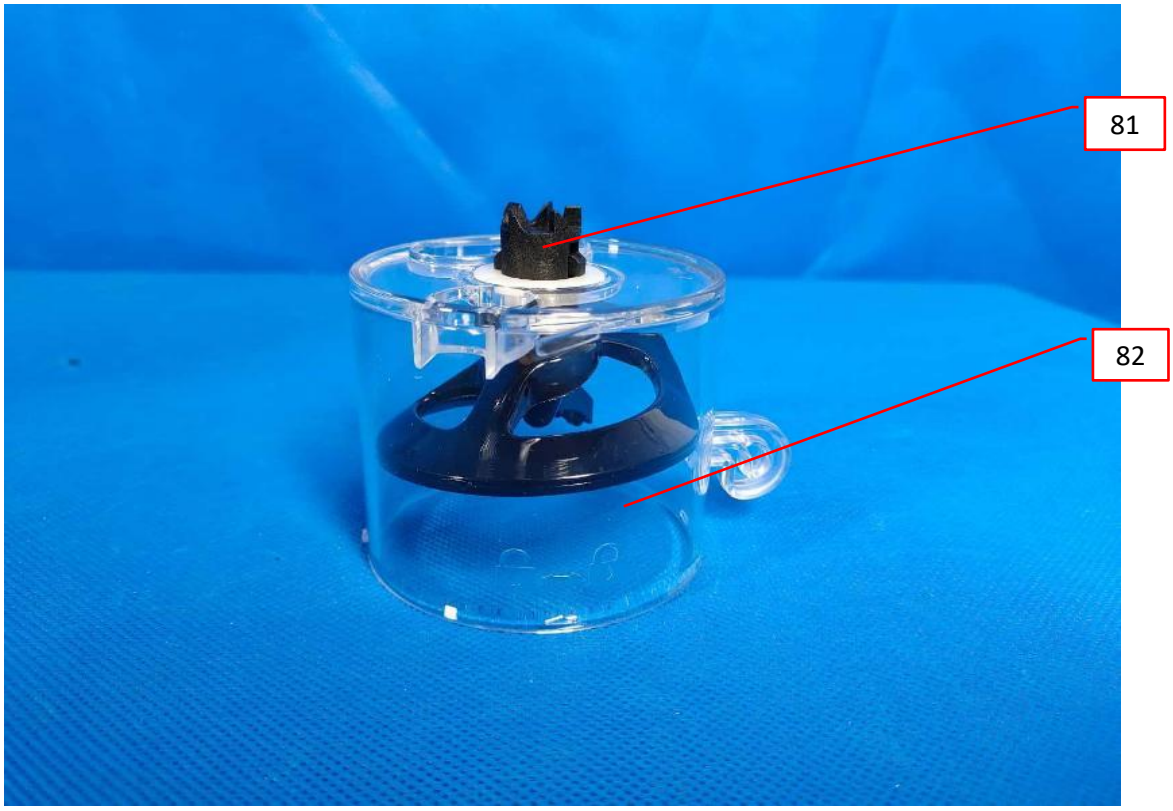


Photo 66 - Internal view for model RRT34001



3.0 Product Photographs

Photo 67 - Internal view for model RRT34001



4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
1	1	Power plug (not shown)	LINOYA ELECTRONIC TECHNOLOGY CO LTD	HD-3	Rated 125V, 15A. 3-wire grounding type plug 1-15P. Connected with power supply cord.	cULus or cETLus
			Various	Various	Rated 125V, 15A. 3-wire grounding type plug 1-15P. Connected with power supply cord.	cULus or cETLus
1	2	Power Supply Cord	NINGBO HAODA ELECTRONICS CO LTD	HPN	Rated 300V, 105°C, 16AWG×3C, VW-1. The length within the rang 0.61m to 2.1m from cord entry to plug face.	cULus or cETLus
			Various	HPN	Rated 300V, 105°C, 16AWG×3C, VW-1. The length within the rang 0.61m to 2.1m from cord entry to plug face.	cULus or cETLus
1	3	Front enclosure	POLYPLASTICS CO LTD	AN7515(++)	ABS/PBT. Rated V-0, HWI=2, HAI=1, 105°C. Min. 1.5 mm thick. Secured to Metal cover by screws.	cURus
1	4	Display panel	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	ABS. Rated HB, HWI=3, HAI=0, 80℃. Min. 1.5 mm thick	cURus
1	5	Handle	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	ABS. Rated HB, HWI=3, HAI=0, 80℃. Min. 1.5 mm thick	cURus
1	6	Door Glass	Various	Various	Tempered glass.Measured min 4 mm in thickness. 330*168.5MM	NR
1	7	Metal cover	Various	Various	SUS430. Measured min 0.5 mm in thickness. Secured to Metal cover by screws.	NR
2	8	Flour container holder	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	ABS. Rated HB, HWI=3, HAI=0, 80℃. Min. 1.5 mm thick	cURus
2	9	Water tank and oil tank holder	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	ABS. Rated HB, HWI=3, HAI=0, 80℃. Min. 1.5 mm thick	cURus
3	10	Rear plastic cover	KINGFA SCI & TECH CO LTD	PP-11285	PP material, rated HB, HWI=4, HAI=0, 130°C, Min. 1.5 mm thick. Kept away from bare live part more than 12.7mm. Secured to Metal cover by screws.	cURus
3	11	Cord clamp	HEYCO PRODUCTS CORP	6N4-4	Bushings, incorporating a strain relief. Rated 75°C. Fixed to the Metal cover.	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
3	12	Marking Label (not shown)	FOSHAN CITY SHUNDE DISTRICT SHUNFA HONG XING COLOR PRINTING CO LTD	SFHXCY0501	UL category PGDQ2 and PGDQ8. Rated 80°C, Suitable for Stainless steel surface. Adhered to Metal cover.	cURus
6	13	Handle cover	Various	Various	SUS430. Measured min 0.5 mm in thickness.	NR
7, 64	14	Right inner housing	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	PET. Rated 155°C, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum.	cURus
7	15	Mixing cup tray	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125℃. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125℃. Min. 3.2 mm thick.	cURus
7	16	Baking surface	Various	Various	Die-cast aluminum easured 3 mm thick minimum.	NR
8	17	Foot	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	PET material. Rated 155°C, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum. Fixed to bottom cover.	cURus
9	18	Fiberglass Sleeving	Various	Various	Grade A silicone rubber coated fiberglass sleeving. Rated 600V, 240ºC, VW-1.	cURus
9	19	Data wire	Various	2651	Rated 105°C, 300V. 24-26AWG for connection PCB.	cURus
9	20	Bottom plastic cover	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	PET material. Rated 155℃, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum.	cURus
9	21	Motor 5	DONGGUAN LANSHUNXIN INDUSTRIAL CO LTD	TY50K	Rated 100-120V~, 50/60Hz, 6W, 60/72r/min, Class H.	cURus
10, 60	22	NTC Sensor assembly	Various	Various	Assembled of item 22a thru 22e.	NR
10, 60	22a	NTC Sensor (not shown)	SHIBAURA ELECTRONICS CO LTD	U1-382	Rated 10V, Tmoa=395℃, R(25℃) =8@.CA #2, 4	cURus
10, 60	22b	NTC Wire (not shown)	Various	1332	Rated 300V, 200℃, Min 24-26AWG for connections of NTC.	cURus
10, 60	22c	Teflon Tube (not shown)	Various	Various	Not heat Shrinkable PTFE tubing. Rated 600V, VW-1, 200℃.	cURus
10, 60	22d	Metal Tube (not shown)	Various	Various	Stainless steel, φ5x18mm.	NR

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
10, 60	22e	Glue (not shown)	RASCHIG GMBH	EP 3585	EP - Molding. rated HB, 130°C, HWI=2, HAI=2, CTI=3. Min. 0.8 mm thick.	cURus
11	23	Internal wire of Thermal link	Various	3122	Rated 300V, 200°C, 16-18 AWG.	cURus
11, 61	24	Lower heating plate	Zhejiang Tianxi Kitchen Appliance Co., Ltd.	TX	Rated 120Vac, 60 Hz, 825w, Sheath type heater. Resistance wire Ocr25AL5 size 0.45mm embedded in magnesium oxide filer encasedin copper cast sheath, 9.5*0.7mm thick, then encased in aluminum cast sheath. Terminated in steel cold pins spaced min. 21 mm, extended 2.5*M2.5*55 mm long from Ceramic end seal. Each end of heating element is provided with a Ceramic. Refer to illustration 4.2 for more dimension detail.	NR
11, 60	25	Thermal link assembly	Various	Various	Two provided. Assembled of item 25a thru 25c.	NR
11, 60	25a	Thermal link (Not shown)	Therm-O-Disc, Incorporated	G4A00	Rated 250V, 15A, Tf: 257°C.	cURus
11, 60	25b	Thermal link tube (Not shown)	Various	Various	Grade A silicone rubber coated fiberglass sleeving. Rated 600V, 240ºC, VW-1.	cURus
11, 60	25c	Clamp Sheet (Not shown)	Various	Various	Galvanized Sheet. Minimum thickness 0.4mm.	NR
12	26	Upper plastic	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	ABS. Rated HB, HWI=3, HAI=0, 80℃. Min. 1.5 mm thick	cURus
12, 13	27	Reed Sensor assembly	Various	Various	Assembled of item 27a thru 27b.	NR
12	27a	Sensor (not shown)	Zhuhai SW-TECHNOLOGY Co., Ltd.	SWT	Rated 180VDC, 80VAC, Max Switching current: 0.5A.	NR
12	27b	Housing (not shown)	Various	Various	ABS. Rated 85°C.	cURus
12	28	Internal wire of Reed Sensor	Various	1569	Rated 300 V, 105°C, min 24 AWG.	cURus
16	29	Motor 1	DONGGUAN LANSHUNXIN INDUSTRIAL CO LTD	TY50K	Rated 100-120V~, 50/60Hz, 6W, 8 or 10r/min, Class H.	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
16	30	Winding coil on ground wire	Shenzhen Chuangda Electromagnetism Technology Co., Ltd.	DM 3.7mH	Rated 3.7mH, Class A. Assembled of item 31a thru 31b.	NR
16	30a	Magnetic core (not shown)	CHANG CHUN PLASTICS CO LTD	T375J	Ferrite matrial.	cURus
16	30b	Wire (not shown)	TAI-I COPPER (GUANGZHOU) CO LTD	UEWF	ANSI TypeMW79C, rated Temperature Class 155.	cURus
16	31	Cable tie	Various	Various	Rated min. 120°C, For fixing the Power Cord.	cURus
16	32	Silicone coated fiberglass sleeving	Various	Various	Grade A silicone rubber coated fiberglass sleeving. Rated 600V, 240ºC, VW-1.	cURus
16	33	Sealer	GUANGZHOU BAIYUN TECHNOLOGY CO.,LTD.	SMG533	Industrial Silicone Sealant,115°C.	cURus
16	34	Filter assembly	Shenzhen Chuanda Electromagnetic Technology Co., Ltd.	CCD4-1A-03-068	Rated 250Vac, 3A. Assembled of item 34a thru 34b.	NR
16	34a	Winding coil (not shown)	Various	Various	Magnetic core: Ferrite matrial. Wire: ANSI Type MW79C, rated Temperature Class 155.	NR
16	34b	Capacitor (not shown)	SHENZHEN SINCERITY TECHNOLOGY CO LTD	MPX	X2 type. Rated min 275V, 0.47µF, 110°C.	cURus
			SHENZHEN SINCERITY TECHNOLOGY CO LTD	MKP	X2 type. Rated min 275V, 0.47µF, 110°C.	cURus
17	35	X2 capacitor 3	CHANGZHOU DEJIE PHOTOELECTRIC TECHNOLOGY CO LTD	MPX	X2. Rated 275VAC, 0.22µF, min. 100°C. Soldered on PCB.	cURus
			CHANGZHOU DEJIE PHOTOELECTRIC TECHNOLOGY CO LTD	MKP	X2. Rated 275VAC, 0.22µF, min. 100°C. Soldered on PCB.	cURus
			Various	Various	X2. Rated 275VAC, 0.22µF, min. 100°C. Soldered on PCB.	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
17	36	Inductor	WEIMEI ELECTRONICS FACTORY DONG GUAN CITY	WM-U11109	Rated 20mH, class A. Assembled of item 36a thru 36b. Refer to illustration 4.4 for more dimension detail.	NR
17	36a	Bobbin (not shown)	CHANG CHUN PLASTICS CO LTD	T375J	Rated V-0, HWI=1, HAI=0, 150 °C.	cURus
17	36b	Wire (not shown)	TAI-I COPPER (GUANGZHOU) CO LTD	UEWF	ANSI TypeMW79C, rated Temperature Class 155.	cURus
17	37	Winding coil	Shenzhen Chuangda Electromagnetism Technology Co. , Ltd.	T1495-1mH min	Rated 1mH, Class A. Assembled of item 37a thru 37b. Refer to illustration 4.5 for more dimension detail.	NR
17	37a	Bobbin (not shown)	CHANG CHUN PLASTICS CO LTD	T375J	Rated V-0, HWI=1, HAI=0, 150 °C.	cURus
17	37b	Wire (not shown)	SHENZHEN CHENGWEI INDUSTRY CO LTD	(x)UEW-F-(&)-(*)	ANSI TypeMW79C, rated Temperature Class 155.	cURus
17	38	Fuse 1	DONGGUAN BETTER ELECTRONICS TECHNOLOGY CO LTD	932	Rated 250VAC, 3.15A. Soldered on PCB.	cURus
			XC ELECTRONICS (SHENZHEN) CORP LTD	5TE	Rated 250VAC, 3.15A. Soldered on PCB.	cURus
			DONGGUAN CHEVRON ELECTRONIC TECHNOLOGY CO LTD	SET	Rated 250VAC, 3.15A. Soldered on PCB.	cURus
17	39	Transformer	NINGBO HUAYU ELECTRONICS.CO., LTD	YC-E22-040	NON-ISOLATING TRANSFORMER. Marked class B, tested and accepted as Class A. Rated Input: 220-240V~, output: 12VDC. It includes the components as shown in item nos. 39a to 39e. Refer to illustration 4.6 for detail.	NR
17	39a	bobbin (not shown)	CHANGSHU SOUTH-EAST PLASTIC CO LTD	PF2A5-151J(b)	Rated 150°C, V-0. Min. 2.0 mm thick	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
17	39b	Insulating Tape (not shown)	JINGJIANG FUWEI ADHESIVE PRODUCT CO LTD	FW	PET film insulating tapes with acrylic adhesive. Rated 130°C	cURus
			JINGJIANG JINGYI ADHESIVE PRODUCT CO LTD	JY25-A (b)	PET film tapes with acrylic adhesive. Rated 130°C.	cURus
17	39c	Magnet Wire (not shown)	ZHEJIANG LANGLI ELECTRIC EQUIPMENTS CO LTD	*UEW/155	ANSI Type MW 79-C. Rated 155 °C. N1: 0.30mm, 46TS. N2: 0.17mm, 40TS. N5: 0.30mm, 40TS. N6: 0.17mm, 13TS.	cURus
			ZHEJIANG LANGLI ELECTRIC EQUIPMENTS CO LTD	QA-*/155	ANSI Type MW 79-C. Rated 155 °C. N3: 0.40mm, 12TS. N4: 0.30mm, 8TS.	cURus
17	39d	varnishe (not shown)	SUZHOU TAIHU ELECTRIC ADVANCED MATERIAL CO LTD	T-4260(a)	ANSI Type MW 80-C, 155°C.	cURus
17	39e	Tubing (not shown)	Various	Various	PTFE tubing. Rated 150V, 200°C, VW-1.	cURus
17	40	Y capacitor	SHANTOU HIGH-NEW TECHNOLOGY DEVELOPMNT ZONE SONGTIAN ENTERPRISE CO LTD	CE-222M	Y2 type. Rated 250Vac, 2200 pF, T125.	cURus
			Various	Various	Y2 type. Rated 250Vac, 2200 pF, T125.	cURus
17	41	Relay 2	DONGGUAN YONGNENG ELECTRONICS CO LTD	YX202-S-105DMF	Rated 125V, 15A, 105°C. 100K cycles endurance. Coil voltage: 5VDC. Soldered on Power PCB	cURus
			Sanyou Corporation Limited	SRG-SH-105DM	Rated 127VAC, 17A, 105°C. 100K cycles endurance. Coil voltage: 5VDC. Soldered on PCB.	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
17	42	Wire connector 1	YUEQING CHANGSHUN ELECTRONICS CO LTD	CS15002-A	Rated 250V, 3A, 85°C. Soldered onto PCB.	cURus
			Various	Various	Rated 250V, 3A, 85°C. Soldered onto PCB.	cURus
17	43	Wire connector 2	YUEQING JIADE ELECTRONICS CO LTD	B250012-1B	Rated 250V, 3A, 85℃, Soldered onto PCB.	cURus
			Various	Various	Rated 250V, 3A, 85℃, Soldered onto PCB.	cURus
17	44	PCB	Various	Various	Rated V-0, 130°C, met UL 796. Measured 1.6 mm thick minimum.	cURus
17	45	optocoupler	LITE-ON Technology Corporation	LTV-817	Isolation voltage of 5300 Vrms.	cURus
			EVERLIGHT ELECTRONICS CO LTD	EL817	Isolators, providing 5000 vac isolation.	cURus
17	46	Varistor	SHANTOU HIGH-NEW TECHNOLOGY DEVELOPMNT ZONE SONGTIAN ENTERPRISE CO LTD	10D271K	Rated 175VAC, 270VDC, 105℃, Soldered on PCB.	cURus
			Various	Various	Rated 175VAC, 270VDC, 105℃, Soldered on PCB.	cURus
17	47	X2 capacitor 1	CHANGZHOU DEJIE PHOTOELECTRIC TECHNOLOGY CO LTD	MPX	X2. Rated 275VAC, 0.68μF, min. 100°C. Soldered on PCB.	cURus
			CHANGZHOU DEJIE PHOTOELECTRIC TECHNOLOGY CO LTD	MKP	X2. Rated 275VAC, 0.68μF, min. 100°C. Soldered on PCB.	cURus
			Various	Various	X2. Rated 275VAC, 0.68μF, min. 100°C. Soldered on PCB.	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
17	48	X2 capacitor 2	CHANGZHOU DEJIE PHOTOELECTRIC TECHNOLOGY CO LTD	MPX	X2. Rated 275VAC, 0.01μF, min. 100°C. Soldered on PCB.	cURus
			CHANGZHOU DEJIE PHOTOELECTRIC TECHNOLOGY CO LTD	MKP	X2. Rated 275VAC, 0.01μF, min. 100°C. Soldered on PCB.	cURus
			Various	Various	X2. Rated 275VAC, 0.01μF, min. 100°C. Soldered on PCB.	cURus
17	49	Fuse 2	DONGGUAN BETTER ELECTRONICS TECHNOLOGY CO LTD	932	Rated 250VAC, 10A. Soldered on PCB.	cURus
			XC ELECTRONICS (SHENZHEN) CORP LTD	5TE	Rated 250VAC, 10A. Soldered on PCB.	cURus
17	50	Relay 1	DONGGUAN YONGNENG ELECTRONICS CO LTD	YX305-S-105DM	Rated 125V, 20A, 105°C, 100K cycles endurance. Coil voltage: 5VDC. Soldered on Power PCB.	cURus
20	51	Motor 1 bracket	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	PET. Rated 155°C, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum.	cURus
20	52	Power PCB bracket	POLYROCKS CHEMICAL CO LTD	168(+)(f1)	PP. Rated V-0, HWI=4, HAI=0, 120℃. Min. 1.7 mm thick.	cURus
20	53	Pusher bracket	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
21	54	Optoelectronic switch cover	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
25	55	Gera	Various	Various	Aluminum alloy material, Min.13 mm thick.	NR
25	56	Container bracket	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
26	57	Motor 3	DONGGUAN LANSHUNXIN INDUSTRIAL CO LTD	TY50K	Rated 100-120V~, 50/60Hz, 6W, 2 or 2.5r/min, Class H.	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
27	58	Motor 2	Zhongshan Mingsheng Electronic Technology Co., Ltd.	TX-STIR-175	Rated DC175V, 20W, Class B.	See 5.0
29	59	Motor PCB bracket	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125℃. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125℃. Min. 3.2 mm thick.	cURus
32	60	Pump bracket	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	ABS. Rated HB, HWI=3, HAI=0, 80℃. Min. 1.5 mm thick.	cURus
33	61	Water Pump	Cinyar Fluid Technology (Suzhou) Co., Ltd	AQZ-12-YS-B03P	12VDC, 0.4A, Class B.	NR
33	61a	Insulation System of Water Pump (not shown)	YUEYANG GREEN TECHNOLOGY CO LTD	YYG-130-1	Class B insulation systems. Including the Bobbin, Winding, Insulation tape, Insulation Tube and Varnish.	cURus
33	62	Internal wires of the pump	Various	1007	Rated 300V, 105℃, 22-26AWG.	cURus
34	63	Oil Pump	Cinyar Fluid Technology (Suzhou) Co., Ltd	AQA-12-G05P	12VDC, 0.4A, Class A.	NR
36	64	Motor 4	Zhongshan Mingsheng Electronic Technology Co., Ltd.	TX-PRESS-175	Rated DC175V, class B, 20W.	See 5.0
41	65	Internal wire of DC Fan	ZHONGSHAN HE YI ELECTRICAL APPLIANCES FACTORY	1569	Rated 300V, 24-26AWG, 105℃.	cURus
41	66	Metal sheet	Various	Various	Galvanized sheet, Min.0.8 mm thick	NR
41, 62	67	Chamber	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	PET material. Rated 155℃, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum.	cURus
42	68	DC fan	Jiangmen Cyclone Motor Industry Co., Ltd.	CX-8025SH	Rated DC 12V, 0.22A, Class A.	NR
43	69	Push pie	KINGFA SCI & TECH CO LTD	PPS-M65(ccc) (##)	PPS, Rated V-0, 130℃, HWI=4, HAI=0, Min. 0.25 mm thick.	cURus
43	70	Push pie bracket	KINGFA SCI & TECH CO LTD	PPS-M65(ccc) (##)	PPS, Rated V-0, 130℃, HWI=4, HAI=0, Min. 0.25 mm thick.	cURus
48	71	Photoelectric PCB cover	LG Chem (Guangzhou) Engineering Plastics Co Ltd	LUPOY GP1000	PC, rated HB, HWI=2, HAI=0, 130 ℃. Measured 1.5mm thick minimum.	cURus

4.0 Critical Components						
Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
50	72	Control PCB bracket	NINGBO LG YONGXING CHEMICAL CO LTD	HI-121H	ABS. Rated HB, HWI=3, HAI=0, 80℃. Min. 1.5 mm thick	cURus
51	73	Control PCB support	NANTONG XING CHEN SYNTHETIC MATERIAL CO LTD	LXS112 BK(f1)	PPE, V-0, HWI=0, HAI=0, Min. 1.0 mm thick, 115℃	cURus
52	74	Panel sticker	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	PET. Rated 155°C, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum.	cURus
55	75	Gear cover	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
55, 60	76	Upper heating plate	Zhejiang Tianxi Kitchen Appliance Co., Ltd.	TX	Rated 120Vac, 60 Hz, 825w, Sheath type heater. Resistance wire Ocr25AL5 size 0.45mm embedded in magnesium oxide filer encasedin copper cast sheath, 9.5*0.7mm thick, then encased in aluminum cast sheath. Terminated in steel cold pins spaced min. 21 mm, extended 2.5*M2.5*55 mm long from Ceramic end seal. Each end of heating element is provided with a Ceramic. Refer to illustration 4.3 for more dimension detail.	NR

4.0 Critical Components

Photo #	Item no.[1]	Name	Manufacturer/ trademark[2]	Type / model[2]	Technical data and securement means	Mark(s) of conformity [3]
57	77	Data wire	Various	2651	Rated 300V, 105°C, 24-26 AWG.	cURus
			Various	2468	Rated 300V, 80°C, 24-26 AWG.	cURus
57	78	Photovoltaic box	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125°C. Min. 3.2 mm thick.	cURus
60	79	Internal wire of heating plate	Various	3122	Rated 300Vac, 200 °C, 16-18 AWG.	cURus
66	80	Container cover	KINGFA SCI & TECH CO LTD	PPS-M65(ccc) (##)	PPS, V-0, 130℃, HWI: 4, HAI: 0, Min. 0.25 mm thick.	cURus
67	81	Driver	KINGFA SCI & TECH CO LTD	PA66-G(f)	PA66. Rated HB, HWI=4, HAI=0, 125℃. Min. 3.2 mm thick.	cURus
			KINGFA SCI & TECH CO LTD	PA66-G(f) (ddd)	PA66. Rated HB, HWI=4, HAI=0, 125℃. Min. 3.2 mm thick.	cURus
67	82	Mixing cup	LG Chem (Guangzhou) Engineering Plastics Co Ltd	LUPOY GP1000	PC material, rated HB, HWI=2, HAI=0, 130℃. Measured 1.5mm thick minimum.	cURus

NOTES:

1) Not all item numbers are indicated (called out) in the photos, as their location is obvious.

2) “Various“ means any type, from any manufacturer that complies with the "Technical data and securement means" and meets the "Mark(s) of conformity" can be used.

3) Indicates specific marks to be verified, which assures the agreed level of surveillance for the component. "NR" - indicates Unlisted and only visual examination is necessary. "See 5.0" indicates Unlisted components or assemblies to be evaluated periodically refer to section 5.0 for details.

5.0 Critical Unlisted CEC Components

INSULATED COIL				
Photo #	Item no.	Name	Manufacturer/Trademark	Type / model
27	58	Motor 2	Zhongshan Mingsheng Electronic Technology Co., Ltd.	TX-STIR-175
Electrical Rating:		Rated DC175V, 20W		Insulation class B
Component Standard used:		UL 1004-1:2012 Ed.2+R:05Nov2020; UL 1004-2:2014 Ed.2+R:28Feb2020; CSA C22.2#100:2014 Ed.7+U1; CSA C22.2#77:2014 Ed.8+E1.		

MATERIALS LIST (refer to illustration 4 for assembly drawing)

Component	Manufacturer	Type/model	Dimensions/thickness/assembly information
Insulation System	YUEYANG GREEN TECHNOLOGY CO LTD	YYG-130-2	UL Recognized. Class B insulation systems. Including the Bobbin, Winding, Insulation tape, Insulation Tube and Varnish.
Core axis	Various	Various	Measured Length 84.9 mm minimum, Diameter 8 mm minimum.
Housing	Various	Various	SUS430. Measured 2.8 mm thick minimum.
Bobbin	According to Insulation System	According to Insulation System	Measured 1.5 mm thick minimum.
Rotor	Various	Various	Φ20 × Φ8 × H30.1 stack thickness, 0.35 silicon steel sheet, 86 pieces.
Stator Winding	According to Insulation System	According to Insulation System	UL Recognized. ANSI Type MW30-C. Rated 180°C.
Insulating paper	According to Insulation System	According to Insulation System	UL Recognized. Measured 0.055 mm thick minimum.
Cable Tie	Various	Various	UL Recognized. Rated min. 120°C, For fixing the Internal wire
Internal wire	Various	3122	UL Recognized. Rated 300Vac, 200°C, 16-22 AWG.
	Various	1007	UL Recognized. Rated 300V, 105°C, 22-26AWG.
Data wire	Various	2651	UL Recognized. Rated 300V, 105°C, 24-26 AWG.
Wire connector	Various	Various	UL Recognized. Rated 250V, 3A, 85°C, Soldered to PCB.
PCB bracket	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	UL Recognized. PET. Rated 155°C, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum.
PCB	Various	Various	UL Recognized. Rated V-0, 130°C, met UL 796. Measured 1.6 mm thick minimum.

5.0 Critical Unlisted CEC Components						
WINDING(S) RESISTANCE						
Winding Designation	Wire Size (mm)	Wire Type	Turns	Volts	Amps	DC resistance (Ω) +/- 10%:
Stator Winding	Ø0.25	According to Insulation System	128T	120V	NA	16.4

VERIFICATION PROCESS			
Frequency: **Annual**	Test Site: **CEC**	Number of samples to test: **1**	
Test Name	Test Parameters		
Winding resistance	See resistance per winding above.		
Dielectric Strength	Apply voltage Between	Test Voltage	Test Time
	Primary to core	1400	60s

5.0 Critical Unlisted CEC Components

INSULATED COIL

Photo #	Item no.	Name	Manufacturer/Trademark	Type / model
36	64	Motor 4	Zhongshan Mingsheng Electronic Technology Co., Ltd.	TX-PRESS-175

Electrical Rating:	Rated DC175V, 20W	Insulation class B
Component Standard used:	UL 1004-1:2012 Ed.2+R:05Nov2020; UL 1004-2:2014 Ed.2+R:28Feb2020; CSA C22.2#100:2014 Ed.7+U1; CSA C22.2#77:2014 Ed.8+E1.	

MATERIALS LIST (refer to illustration 4.1 for assembly drawing)

Component	Manufacturer	Type/model	Dimensions/thickness/assembly information
Insulation System	YUEYANG GREEN TECHNOLOGY CO LTD	YYG-130-2	UL Recognized. Class B insulation systems. Including the Bobbin, Winding, Insulation tape, Insulation Tube and Varnish.
Core axis	Various	Various	SUS430. Measured Length 128.5 mm minimum, Diameter 8 mm minimum.
Housing	Various	Various	SUS430. Measured 2.8 mm thick minimum.
Bobbin	According to Insulation System	According to Insulation System	Measured 1.5 mm thick minimum.
Rotor	Various	Various	Φ20 × Φ8 × H30.1 stack thickness, 0.35 silicon steel sheet, 86 pieces.
Stator Winding	According to Insulation System	According to Insulation System	UL Recognized. ANSI Type MW30-C. Rated 180℃.
Insulating paper	According to Insulation System	According to Insulation System	UL Recognized. Measured 0.055 mm thick minimum.
Cable Tie	Various	Various	UL Recognized. Rated min. 120°C, For fixing the Internal wire
Internal wire	Various	3122	UL Recognized. Rated 300Vac, 200℃, 16-22 AWG.
	Various	1007	UL Recognized. Rated 300V, 105℃, 22-26AWG.
Data wire	Various	2651	UL Recognized. Rated 300V, 105℃, 24-26 AWG.
Wire connector	Various	Various	UL Recognized. Rated 250V, 3A, 85℃, Soldered to PCB.
PCB bracket	FOSHAN SHUNDE KINGDE ENGINEERING PLASTICS CO LTD	KF-5330	UL Recognized. PET. Rated 155℃, V-0, HWI=0, HAI=0, CTI=3. Measured 1.5 mm thick minimum.
PCB	Various	Various	UL Recognized. Rated V-0, 130℃, met UL 796. Measured 1.6 mm thick minimum.

WINDING(S) RESISTANCE

Winding Designation	Wire Size (mm)	Wire Type	Turns	Volts	Amps	DC resistance (Ω) +/- 10%:
Stator Winding	Ø0.25	According to Insulation System	128T	120V	NA	16.4

VERIFICATION PROCESS

Frequency: **Annual**	Test Site: **CEC**	Number of samples to test: **1**

Test Name	Test Parameters		
Winding resistance	See resistance per winding above.		
Dielectric Strength	Apply voltage Between	Test Voltage	Test Time
	Primary to core	1400	60s

6.0 Critical Features

Recognized Component - A component part, which has been previously evaluated by an accredited certification body with restrictions and must be evaluated as part of the basic product considering the restrictions as specified by the Conditions of Acceptability.

Listed Component - A component part, which has been previously Listed or Certified by an accredited Certification Organization with no restrictions and is used in the intended application within its ratings.

Unlisted Component - A part that has not been previously evaluated to the appropriate designated component standard. It may also be a Listed or Recognized component that is being used outside of its evaluated Listing or component recognition.

Critical Features/Components - An essential part, material, subassembly, system, software, or accessory of a product that has a direct bearing on the product's conformance to applicable requirements of the product standard.

Construction Details - For specific construction details, reference should be made to the photographs and descriptions. All dimensions are approximate unless specified as exact or within a tolerance. In addition to the specific construction details described in this Report, the following general requirements also apply.

1. Spacing - In primary circuits the following spacing are maintained through air and over surfaces of insulatingmaterial between current-carrying parts of opposite polarity and between bare live part and other non-current-carrying conductive parts(Rating of motor employed 1/3 horsepower (250W output) or less).

	Clearance	Creepage distances
Basic insulation	1.6 mm	2.4 mm
Supplementary insulation	1.2 mm	2.4 mm
Functional insulation	1.6 mm	2.2 mm
Reinforced insulation	1.5 mm	4.8 mm

2. Mechanical Assembly - Components such as switches, fuseholders, connectors, wiring terminals and display lamps are mounted and prevented from shifting or rotating by the use of lockwashers, starwashers, or other mounting format that prevents turning of the component.
3. Corrosion Protection - All ferrous metal parts are protected against corrosion by painting, plating or the equivalent.
4. Accessibility of Live Parts - All uninsulated live parts in primary circuitry are housed within a non-metallic enclosure constructed with no openings other than those specifically described in Sections 4 and 5.
5. Polarized Connection - This product is provided with a polarized power supply connection. All single pole switches and fuses are connected only to the ungrounded supply circuit conductor.
6. Grounding - All exposed dead-metal parts and all dead-metal parts within the enclosure that are exposed are connected to the grounding lead of the power supply cord.
7. Internal Wiring - Internal wiring is routed away from sharp or moving parts. Internal wiring leads terminating in soldered connections are made mechanically secure prior to soldering. Recognized Component separable (quick disconnect) connectors of the positive detent type, closed loop connectors, or other types specifically described in the text of this report are also acceptable as internal wiring terminals. At points where internal wiring passes through metal walls or partitions, the wiring insulation is protected against abrasion or damage by plastic bushings or grommets.
8. Schematics - Refer to Illustration 3, 3.1 to 3.3 for schematics requiring verification during Field Representative Inspection Audits.
9. Markings - The product is marked on a labeling system as described in item no. 12 of section 4.0 with the following:
   - applicant's name or brand name
   - model number
   - date of manufacture
   - electrical ratings (volts, power & frequency)
10. Cautionary Markings - The caution marking shall not be less than 2.4 mm in height.
    Refer to Illustration 1.1, 1.2.

6.0 Critical Features

11. Installation, Operating and Safety Instructions - Instructions for installation and use of this product areprovided by the manufacturer as required by the standard.
    The height of lettering in the text and illustrations of the safety instructions shall be as follows:
    a) Upper case letters shall not be less than 5/64 inch (2.1 mm) high;
    b) Lower case letters shall not be less than 1/16 inch (1.6 mm) high; and
    c) The phrases IMPORTANT SAFEGUARDS and SAVE THESE INSTRUCTIONS shall be in letters not less than 3/16 inch (4.8 mm) high.
    Refer to Illustration 2, 2.1 to 2.4 for layouts.

12. Carton Marking – The following are required:
    -The “HOUSEHOLD USE ONLY” or “HOUSEHOLD TYPE” must be located on at least one outside surface.
    -Appear in lettering not less than the height as specified:

The dimension of the carton panel (mm)	Minimum height of lettering in inches (mm)
0~152	3.2
152~254	4.8
more than 254	6.4

13. Production Control - Separate production lines for different versions. Quality checks will be performed for correspondence between Rating label logo and the specific differences, according to Illustration 1.

14. Logo Dependent Marking - The required marking is dependent on the specific ETL logo applied to the product as authorized by the Authorization to Mark. In addition to the required marking of items 9 and 10, all products bearing the cETL or cETLus logo must also be marked in letters not less than 2.4 mm high, as below :
    "ATTENTION:NE PAS PLONGER DANS L'EAU"
    "POUR USAGE DOMESTIQUE UNIQUEMENT"
    "Débranchez avant d'assembler ou de retirer des pièces"
    "Lire les instructions avant l'utilisation"


7.0 Illustrations

Illustration 1 - Table of version differences

Section	Item	Specific Difference	Logo Restriction
7.0	1.1	Label with English and French Cautionary Markings	cETL, cETLus, ETLus
7.0	1.2	Label with English Cautionary Markings	ETLus only

7.0 Illustrations

Illustration 1.1 - Cautionary Marking

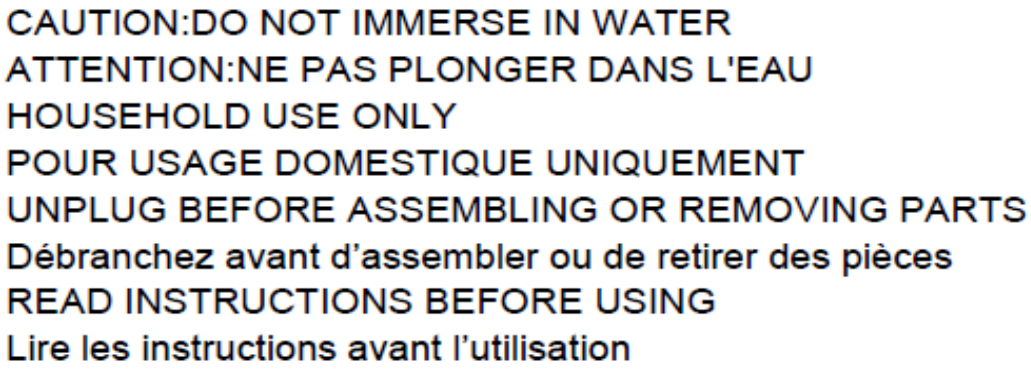

Note:
All letters not less than 3/32 inch (2.4 mm) high

7.0 Illustrations

Illustration 1.2 - Cautionary Marking

CAUTION:DO NOT IMMERSE IN WATER
HOUSEHOLD USE ONLY
UNPLUG BEFORE ASSEMBLING OR REMOVING PARTS
READ INSTRUCTIONS BEFORE USING

Note:
All letters not less than 3/32 inch (2.4 mm) high

7.0 Illustrations

Illustration 2 - Instruction Manual

Noted: Only part of the Instruction Manual shown in this report.

IMPORTANT SAFEGUARDS

When using electrical appliances, basic safety precautions should always be followed including the following:

1. Read all instructions.
2. Do not touch hot surfaces. Use handles or knobs.
3. To protect against electrical shock do not immerse cord, plugs, or main body of appliance in water or other liquid.
4. Close supervision is necessary when any appliance is used by or near children.
5. Turn the appliance OFF, then unplug from the outlet when not in use, before assembling or disassembling parts and before cleaning. To unplug, grasp the plug and pull from the outlet. Never pull from the power cord.
6. Do not operate any appliance with a damaged cord or plug or after the appliance malfunctions or has been damaged in any manner. Return appliance to the nearest authorized service facility for examination, repair, or adjustment. Contact the manufacturer at their customer ben@apecoo.com service telephone number for information on examination, repair, or adjustment.
7. The use of accessory attachments not recommended by the appliance manufacturer may cause injuries.
8. Do not use outdoors.
9. Do not let cord hang over edge of table or counter, or touch hot surfaces.
10. Do not place on or near a hot gas or electric burner, or in a heated oven.
11. Extreme caution must be used when moving an appliance containing hot oil or other hot liquids.
12. Always attach plug to appliance first, then plug cord into the wall outlet. To disconnect, turn any control to "off", then remove plug from wall outlet.
13. Do not use appliance for other than intended use.
14. A short power-supply cord (or detachable power-supply cord) is provided to reduce the risk resulting from becoming entangled in or tripping over a longer cord.
15. Longer detachable power-supply cords or extension cords are available and may be used if care
is exercised in their use.
16. If a longer detachable power-supply cord or extension cord is used:
1) The marked electrical rating of the cord set or extension cord should be at least as great as the electrical rating of the appliance;
2) The cord should be arranged so that it will not drape over the countertop or tabletop where it can be pulled on by children or tripped over unintentionally;
3) The appliance is of the grounded type, the cord set or extension cord should be a grounding-type 3-wire cord.
17. Oversize foods or metal utensils must not be inserted in a toaster-oven as they may create a fire or risk of electric shock."
18.A fire may occur if the toaster-oven is covered or touching flammable material, including curtains, draperies, walls, and the like, when in operation. Do not store any item on top of the appliance when in operation."

7.0 Illustrations

Illustration 2.1 - Instruction Manual

19.Do not clean with metal scouring pads. Pieces can break off the pad and touch electrical parts involving a risk of electric shock.
20.Extreme caution should be exercised when using containers constructed of other than metal or glass."
21. Do not store any materials, other than manufacturers recommended accessories, in this oven when not in use."
22. Do not place any of the following materials in the oven: (List all materials – that is, paper, cardboard, plastic, and the like).
23. Do not cover crumb tray or any part of the oven with metal foil. This will cause overheating of the oven."
24. Press and hold the power button to turn off the device.
25. Appliances are not intended to be operated by means of an external timer or separate remote-control system
26. This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
27.Children should be supervised to ensure that they do not play with the appliance.
28. Avoid contacting moving parts. Do not attempt to defeat any safety interlock mechanisms. Keep hands, hair, clothing, as well as spatulas and other utensils away from beaters during operation to reduce the risk of injury to persons, or damage to the mixer. Remove beaters from mixer before washing.
29.If the SUPPLY CORD is damaged, it must be replaced by the manufacturer, its service agent or similarly qualified persons in order to avoid a hazard.

HOUSEHOLD USE ONLY

SAVE THESE INSTRUCTIONS

7.0 Illustrations

Illustration 2.2 - Instruction Manual

	Decreasing button. Click this button to adjust the number of rotis, the amount of water, and the roti position. **Press and hold** it to decrease quickly.
	Water level button. Different flours are supposed to go with slightly different volumes of water for each dough, which needs to be adjusted to achieve the best results. After clicking this button, the icon will flash. Click  or  to choose the water level, then click this button again to confirm. There are 9 levels of water volume. L1 is the lowest and L9 is the highest. The default setting is L5. When the rotis are too dry or too small, turn up the water level; when the dough is too watery and sticky and cannot hold its shape well, turn down the water level.
	Roti baking level button. By choosing different levels, you can regulate the heating duration time of the rotis, thereby adjusting the levels of crispiness. After clicking this button, the icon will flash; click  or  to choose the baking level, then click this button to confirm. There are three levels. L1 is the lowest level with the shortest heating time, and L3 is the highest with the longest heating time. the default setting is L3. If you prefer crispier and more burnt rotis, choose L3.
	Internal pipeline cleaning button. After the machine has been used for a certain period (for example, 3 months or 6 months), the internal pipelines may need to be cleaned. **Press and hold** this button to initiate the internal pipeline cleaning program, removing any remaining oil and water from the internal pipes. For detailed instructions, please refer to the "**Cleaning and Storage**" section.
	Oil level button After click this button, the icon will flash. Click + or - to choose the oil level. Or if you do not want oil in your roti/tortillas, you can also put nothing in the oil container and ignore this icon.
	This icon lights up or flashes when entering the flour-clearing program.
	This icon lights up or flashes when entering the internal pipeline cleaning program.
	This icon lights up when the number of rotis is displayed
	This icon lights up when the baking level button is clicked.
	This icon lights up when the mixing cup is missing. Note: It can be removed by installing the mixing cup.
	This icon lights up in case of a water shortage alarm. Note: It can be removed by adding a proper amount of water.
	This icon lights up in case of a flour shortage alarm. Note: It can be removed by adding a proper amount of flour.
	This icon lights up when the water level is being selected.
	This icon flashes during preheating.


7.0 Illustrations

Illustration 2.3 - Instruction Manual

● Cleaning and storage

1. When cleaning the machine, please unplug the power cord.
2. After each use, the mixing cup and the mixing cup tray should be cleaned in time to prevent the flour from hardening and becoming difficult to clean.
3. When cleaning the baking plate, please wait for the baking plate to cool. Use a soft cloth or brush to clean the upper and lower baking plates.
4. Flour containers, water containers, oil containers, and other containers can be cleaned according to personal preference regarding the cleaning frequency.
5. For the disassembly and assembly of the mixing cup and flour container, please see below.

Flour container parts assembly (already assembled for 1st time use)

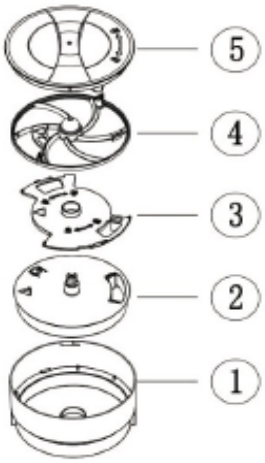

1. Put ② into ① and align the yellow triangle symbol on ② with the yellow triangle symbol on ①. (*Note: Please make sure the silicone is assembled correctly*). See the figure below:

7.0 Illustrations


Illustration 2.4 - Instruction Manual




2. Place ③ on ② and rotate clockwise to lock. (*Note: After locking, the direction of the arrow should be aligned.*) See the figure below.



3. Match the mixing wheel with ④ and rotate it slightly clockwise to make it match. (*Note: Use two stoppers of different sizes for the drive lever to ensure they match each other.*)

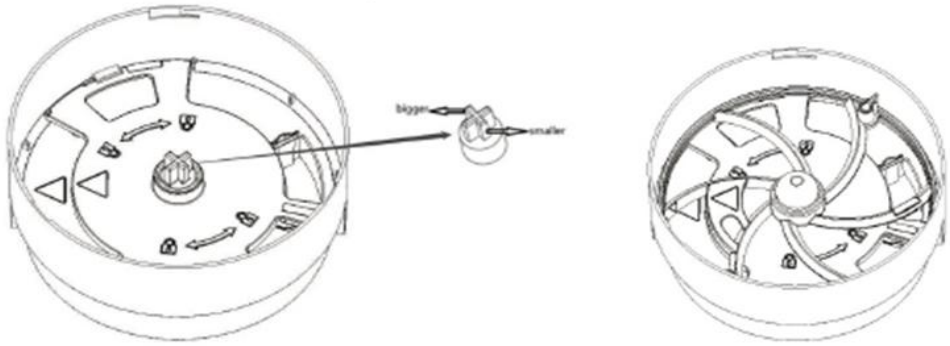

4. Please make sure that the silicone sheet is not lost or damaged during installation.

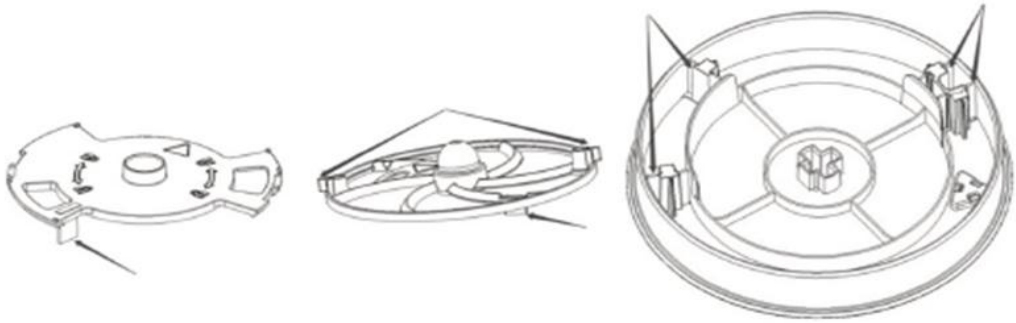


5. Add flour into the storage cup to the maximum extent, cover the lid, rotate, and lock it.




7.0 Illustrations

Illustration 3 - Circuit Diagram of whole appliance of model RRT34001

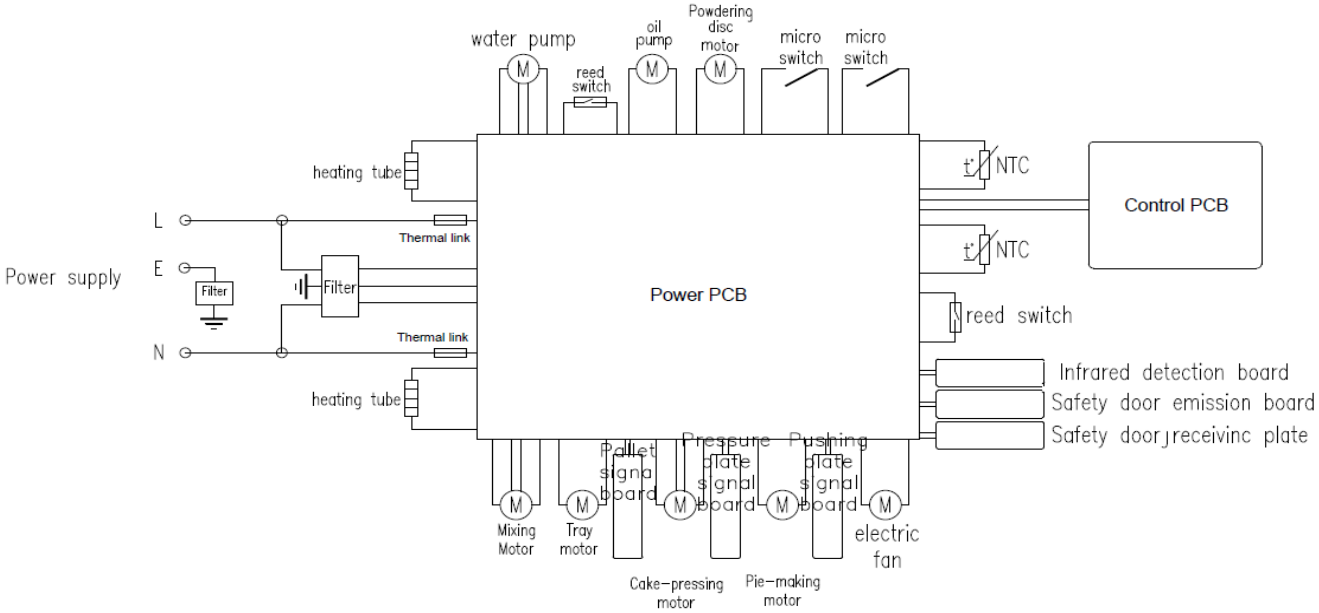


7.0 Illustrations


Illustration 3.1 - Circuit Diagram of Power PCB of model RRT34001

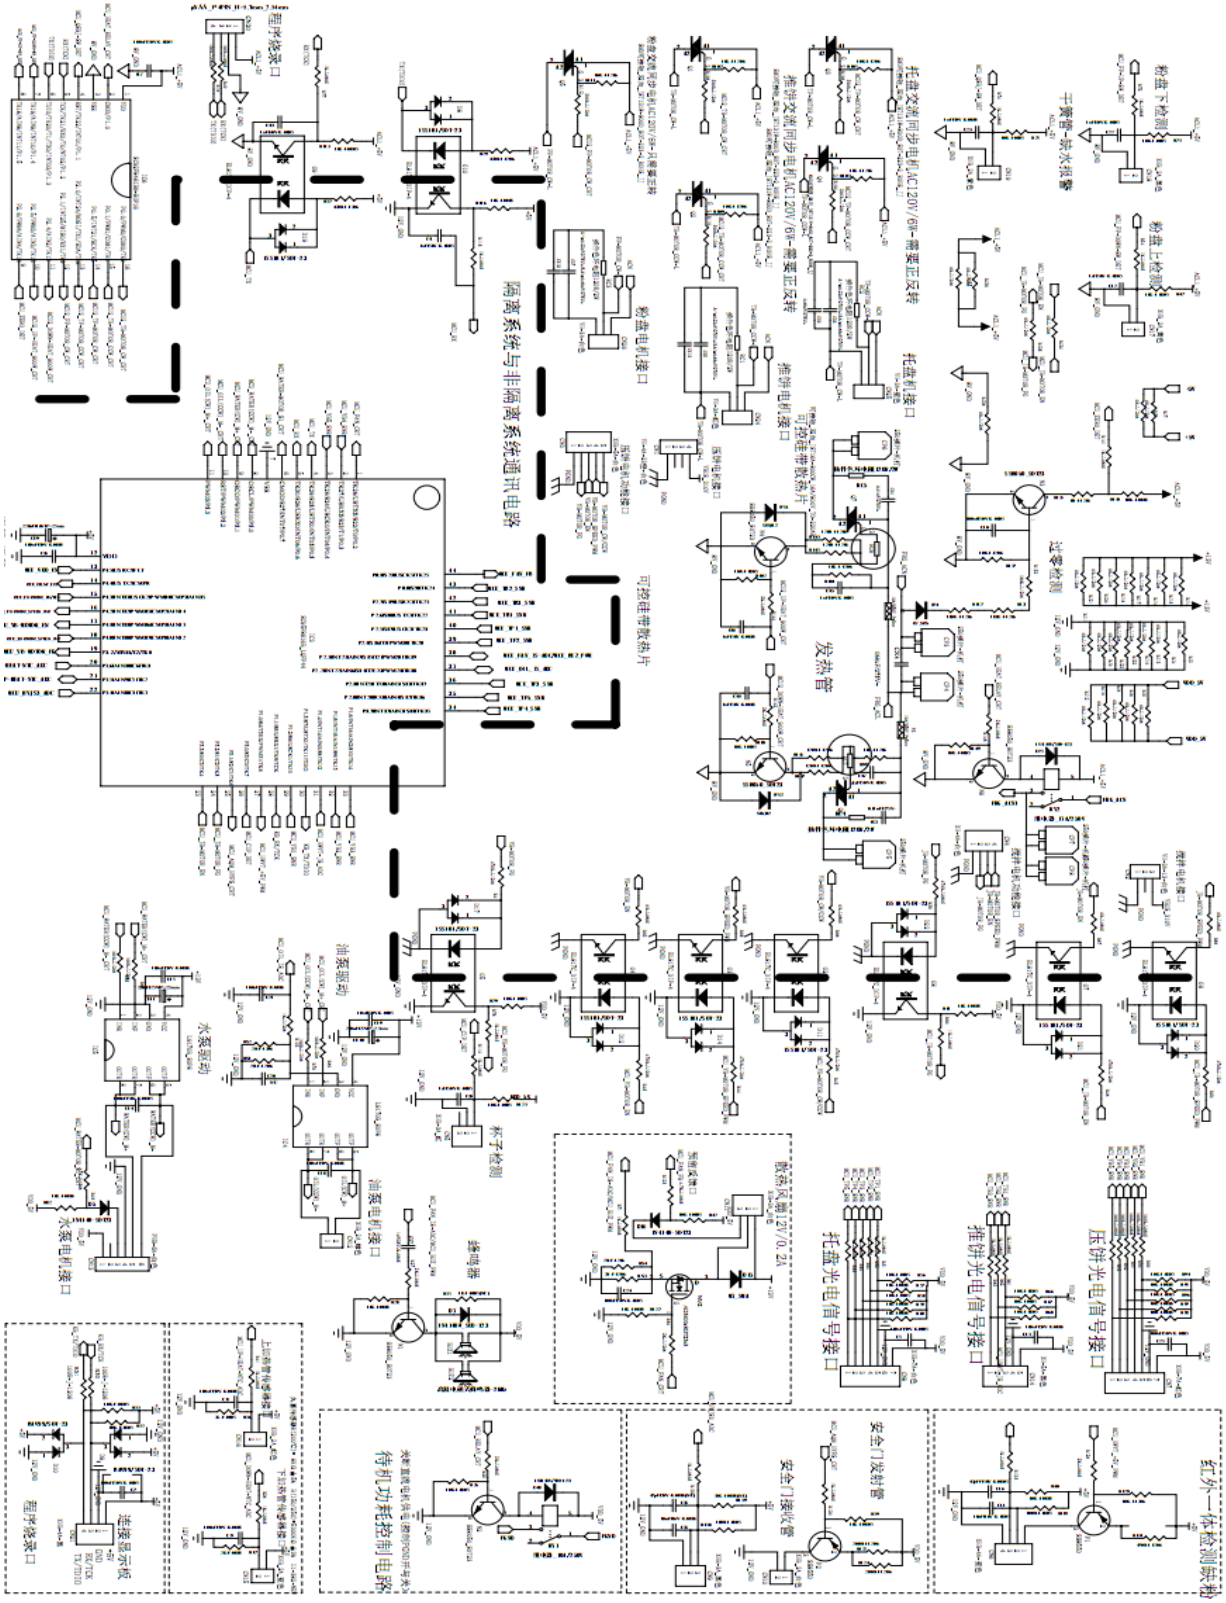

7.0 Illustrations


Illustration 3.2 - Circuit Diagram of Power PCB of model RRT34001

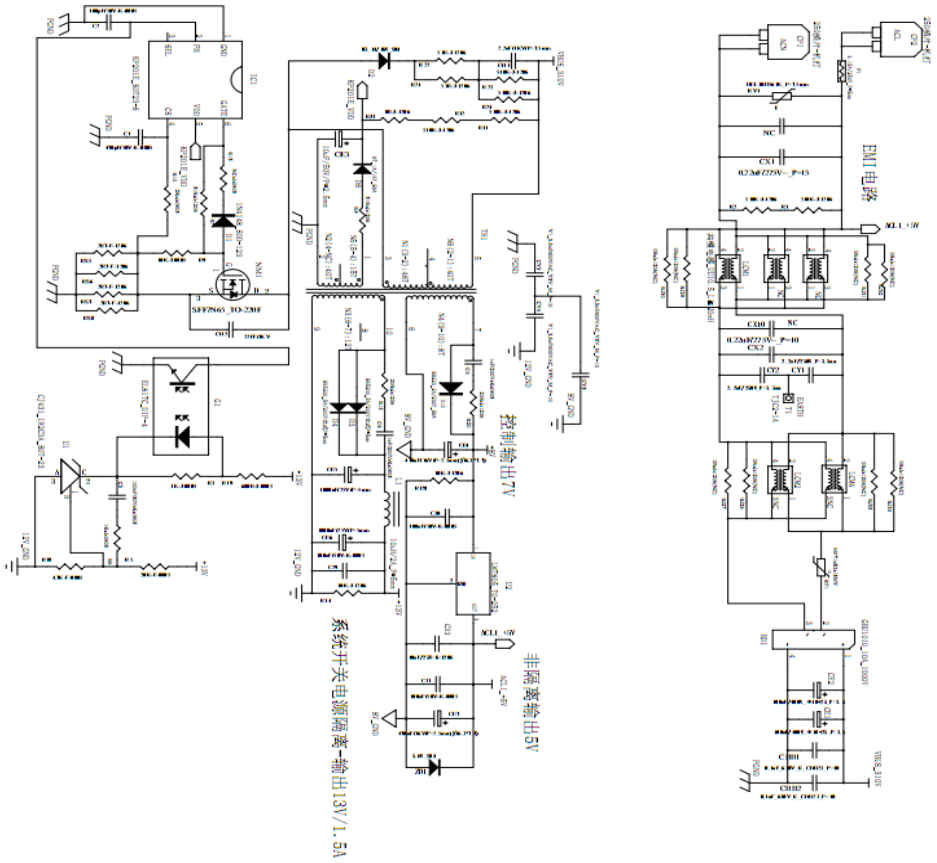

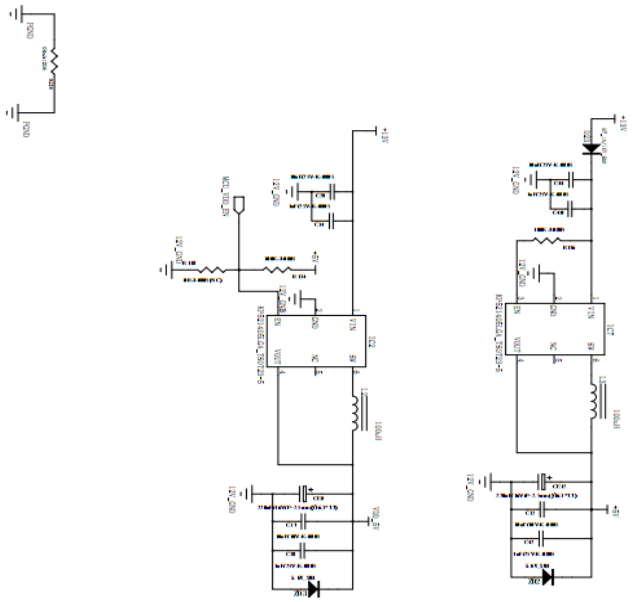


7.0 Illustrations

Illustration 3.3 - Circuit Diagram of Control PCB of model RRT34001

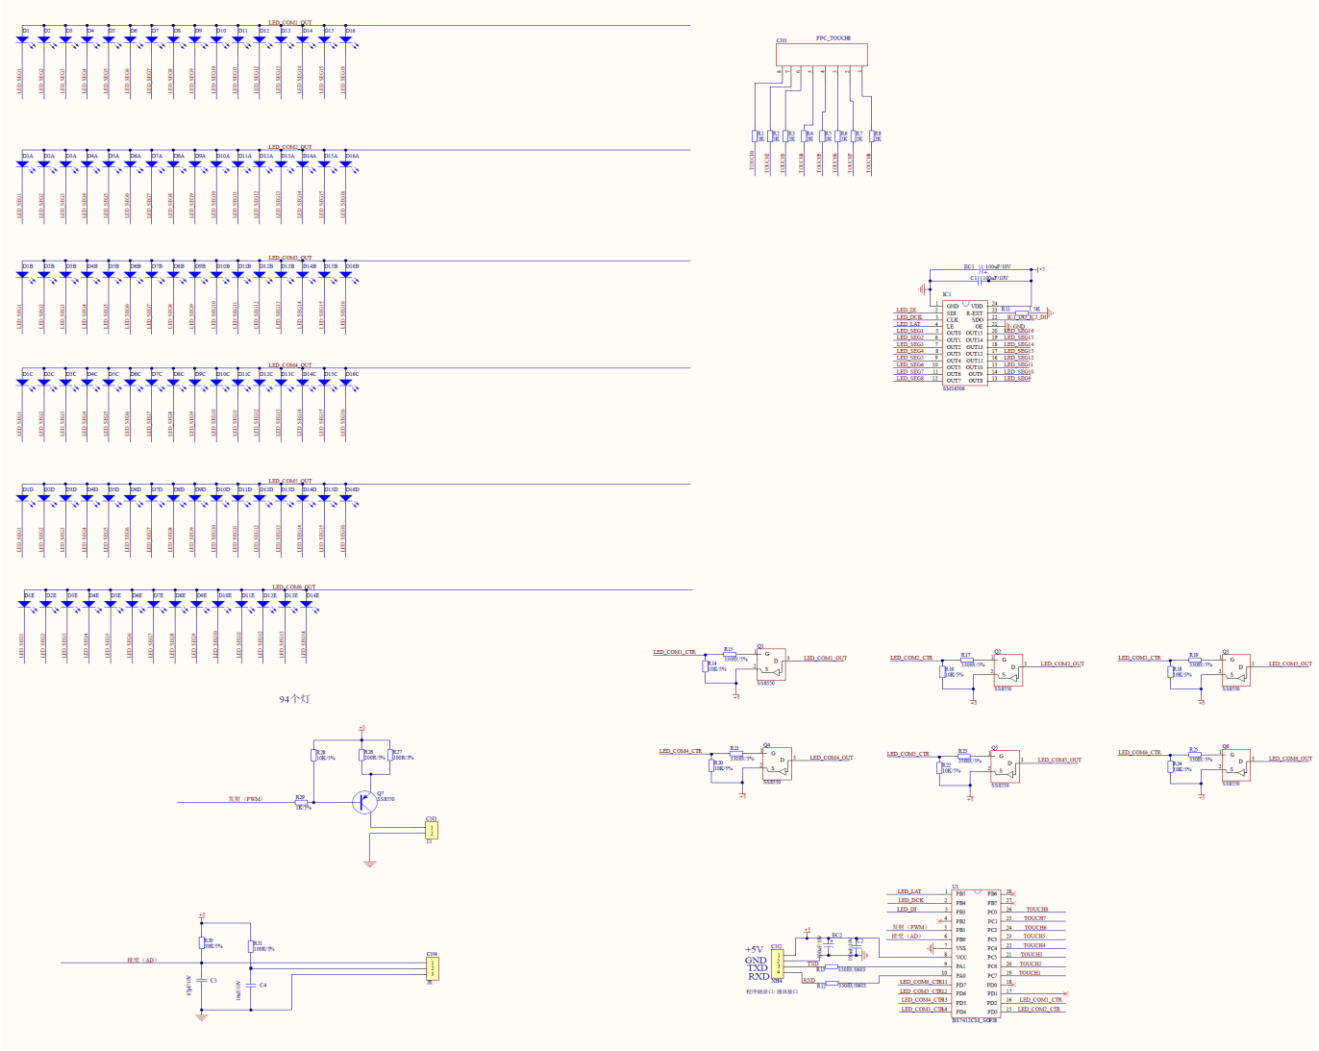


7.0 Illustrations

Illustration 4 - Specification of Motor Motor 2, type TX-STIR-175

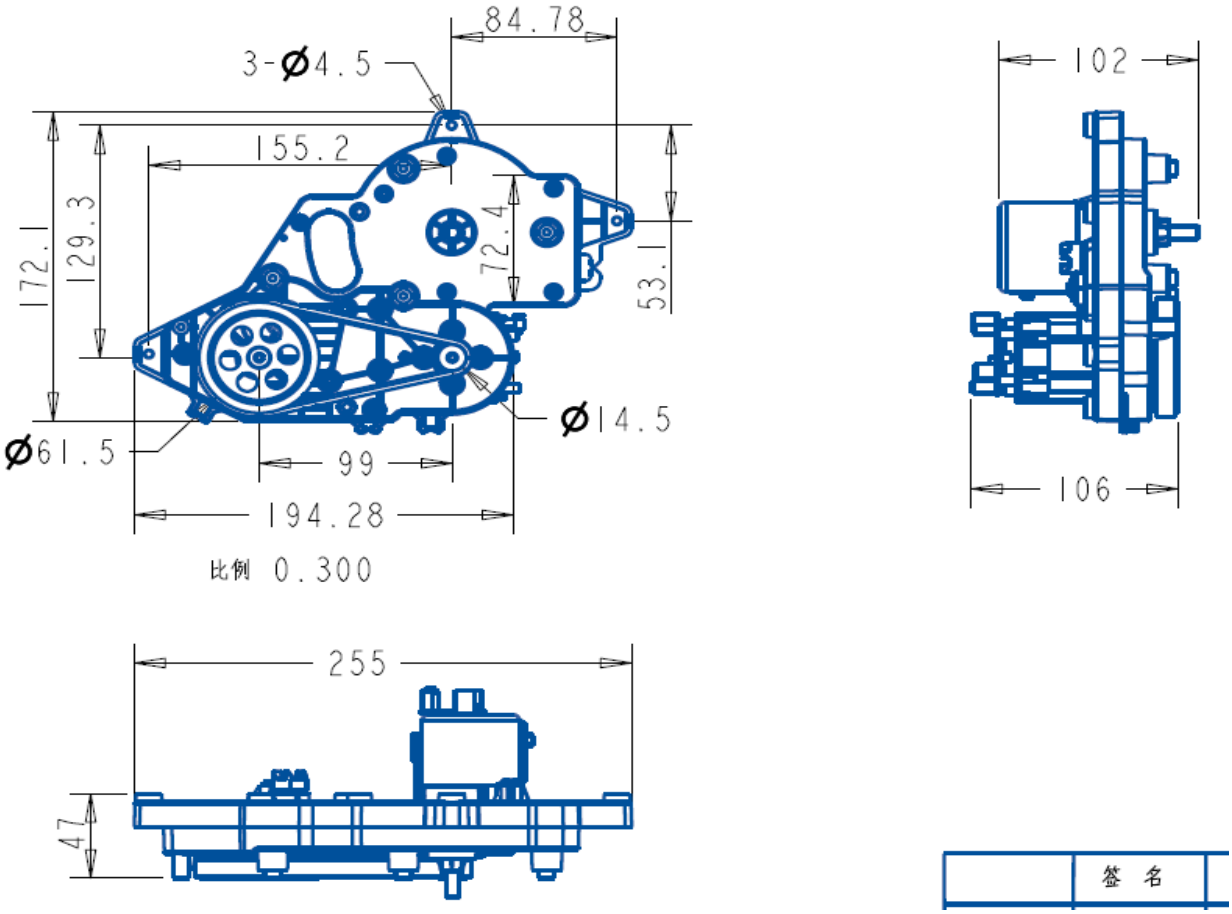


7.0 Illustrations

Illustration 4.1 - Specification of Motor Motor 4, type TX-PRESS-175

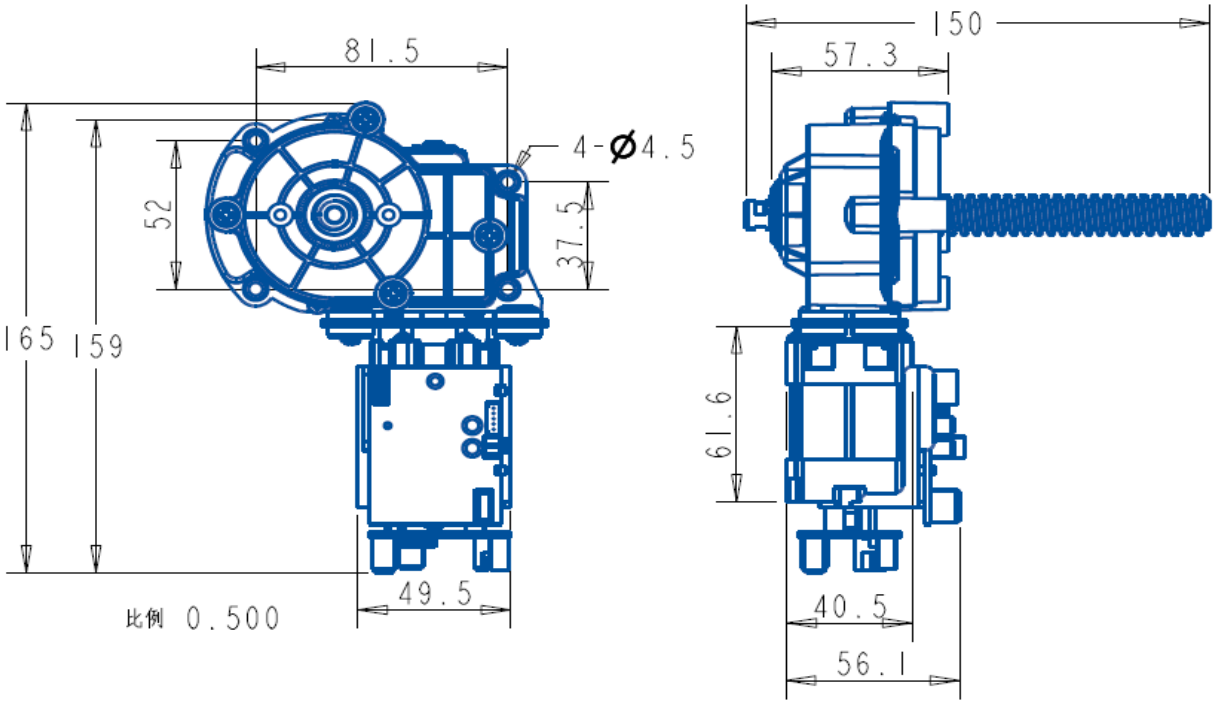


7.0 Illustrations

Illustration 4.2 - Specification of Lower heating plate, type TX

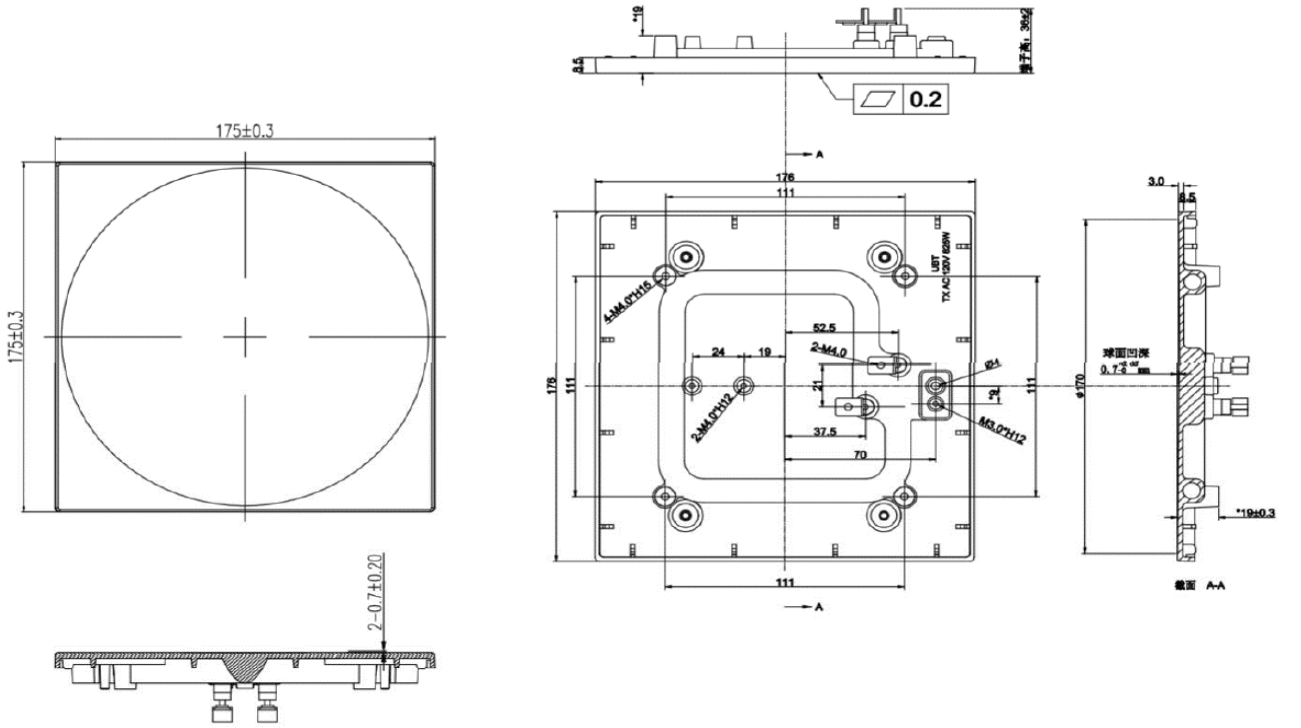

7.0 Illustrations


Illustration 4.3 - Specification of Upper heating plate, type TX

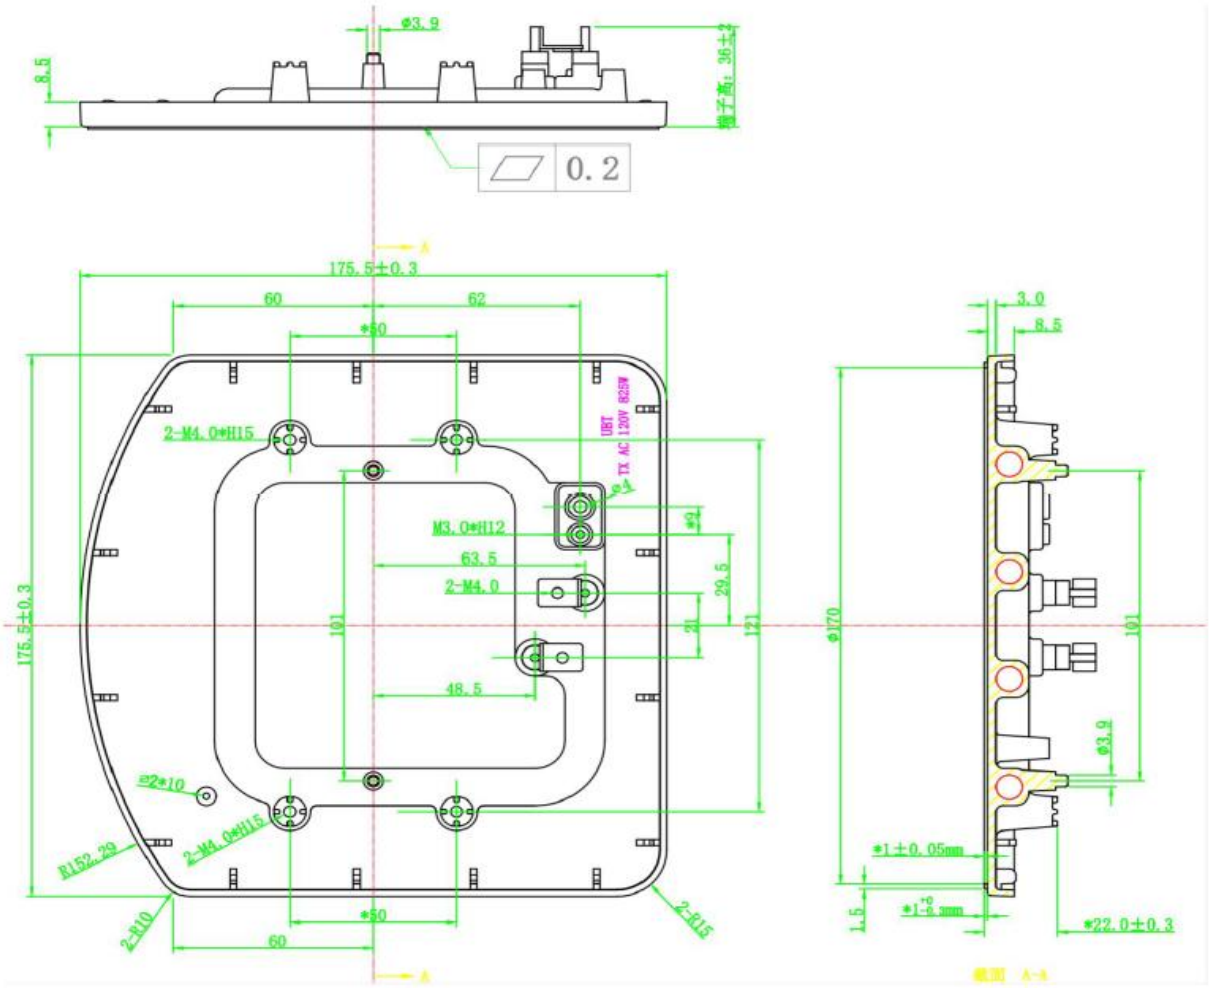


7.0 Illustrations

Illustration 4.4 - Specification of Inductor, type WM-U11109


1.DIMENSION(外观尺寸图): UNIT(单位):mm

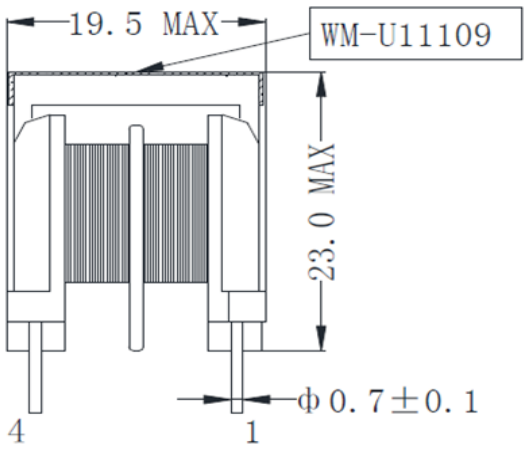

主视图

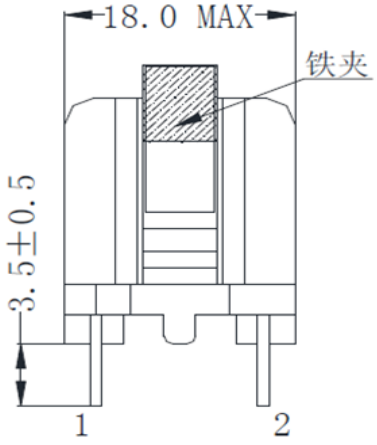


侧视图

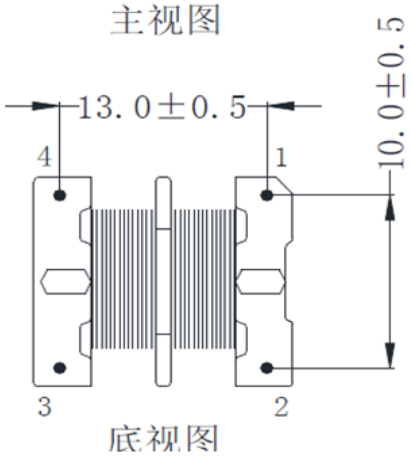


底视图

NOTE:
1. PIN1-2朝机台外顺绕.
2. 铁芯装于顶部,铁芯须用铁夹固定.
3. 产品须真空含浸.
4. 标签贴于顶部,字根朝PIN1-4.
5. 产品需过48H盐雾。

2.1.SCHEMATIC(线路图):

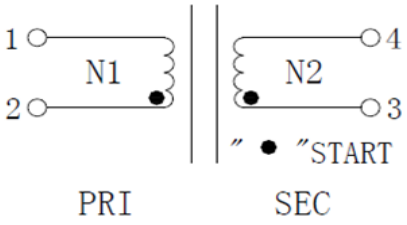

2.2. WINDI NG (剖面图):

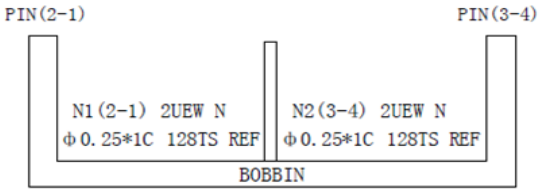


2.3. WINDING TABLE (绕线结构):

Winding No 组别	Pin 脚位	Wire&Wire Coppe 线径*股数	Turns 圈数	Winding Tape 绕线方式	Tape 胶带	Tube 套管
N1	2-1	2UEW 0.25*1C	128TS REF	密绕		
N2	3-4	2UEW 0.25*1C	128TS REF	密绕		

7.0 Illustrations

Illustration 4.5 - Specification of Winding coil, type T1495-1mH min

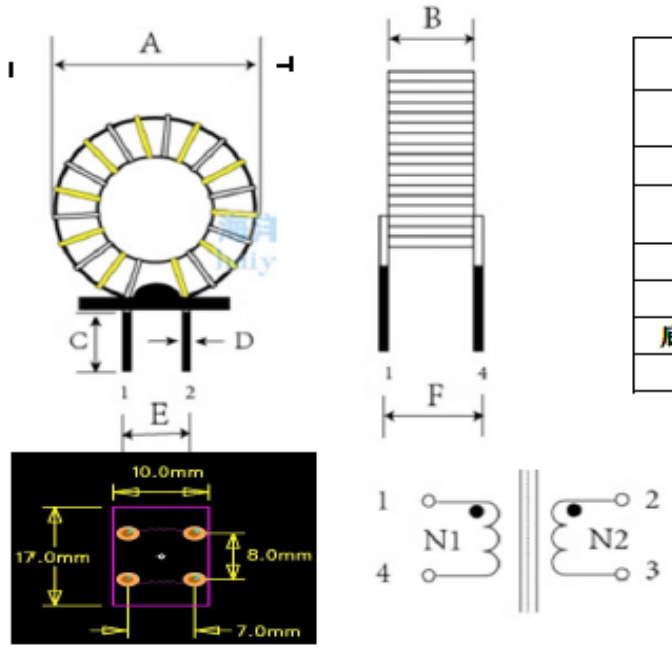

A	17.0mmMAX
B	7.0mmMAX
C	4.0mmMAX
D	0.7mm±0.1mm
E	8.0mm±0.5mm
F	7.0mm±0.5mm
底板	1.0mm

五、焊接性能: (参考)

1. 手工焊接

烙铁头温度: 350～380℃


焊接时间 : 3 秒/次

2. 波峰焊温度: 265℃±5℃

六, 绕组结构:

0.7mm 3UEW 绕 10TSREF 并绕


0.7mm 2UEW 绕 10TSREF 并绕




7.0 Illustrations

Illustration 4.6 - Specification of Transformer, type YC-E22-040


1. 外形尺寸/MECHANICAL DIMENSION(UNIT:mm)

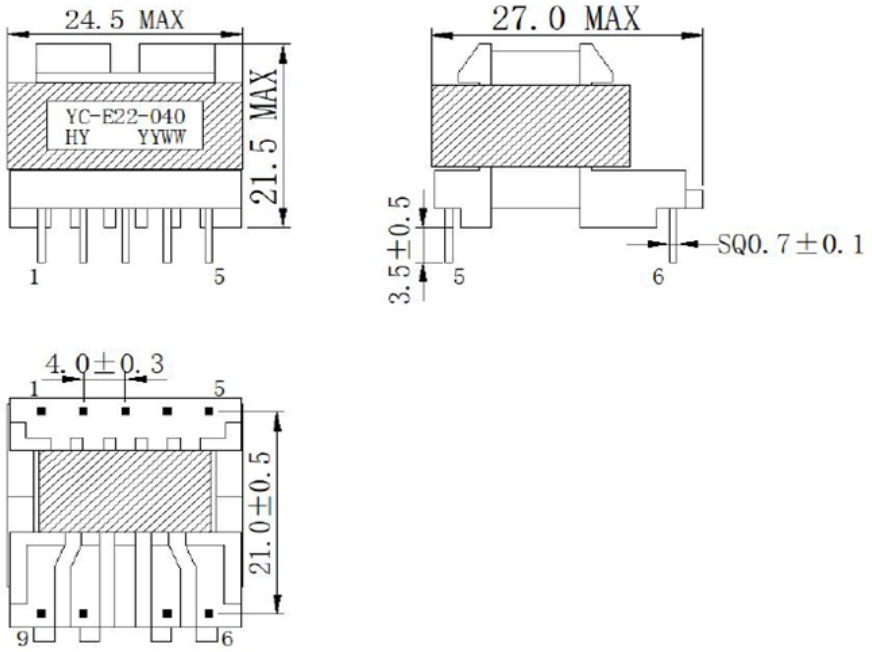

2. SCHEMATIC 电原理图:

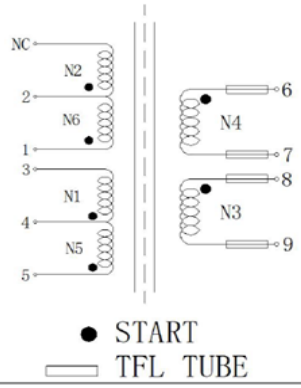

3. WINDING/内部结构图:

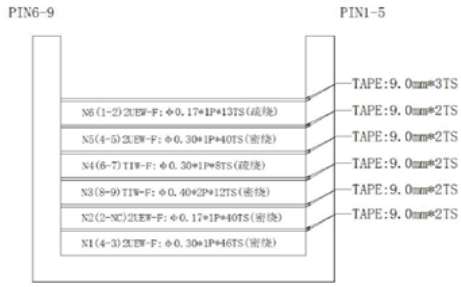

4：绕线顺序/WINDING SPECIFICATION:

绕组顺序	脚位		线径 WIRE	匝数 TURN	胶带 TAPE	TFL 套管		备注
	进线 S	收线 F				进线	出线	
N1	4	3	2UEW-F: ∮0.30*1p	46TS	9.0mm*2TS	/	TFL	密绕
N2	2	NC	2UEW-F: ∮0.17*1p	40TS	9.0mm*2TS	/	/	密绕
N3	8	9	TIW-F: ∮0.40*2p	12TS	9.0mm*2TS	TFL	TFL	密绕
N4	6	7	TIW-F: ∮0.30*1p	8TS	9.0mm*2TS	TFL	TFL	疏绕
N5	5	4	2UEW-F: ∮0.30*1p	40TS	9.0mm*2TS	/	/	密绕
N6	2	1	2UEW-F: ∮0.17*1p	13TS	9.0mm*3TS	/	/	疏绕

备注：
1. 所有绕组 PIN1-5 朝右，顺时针绕线；
2. 产品 PIN6.7.8.9 脚穿套管.

8.0 Test Summary					
Evaluation Period	31-Dec-2024 - 09-Feb-2026			Project No.	241231145GZU
Sample Rec. Date	31-Dec-2024	Condition	Prototype	Sample ID.	S241231145-001~010
Test Location	Intertek Testing Services Shenzhen Ltd., Shunde Branch Address: Room 202/203/204, Block 8, Tinfulai International Industrial Park, No. 3, Changfu West Road, Rongli Community, Ronggui Subdistrict, Shunde District, Foshan, Guangdong, China				
Test Procedure	Testing Lab				
Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria.					
The following tests were performed:					

Test Description	UL 1026:2012 Ed.6+R:29Sep2023 / Clause	CSA C22.2#60335-1:2016 Ed.2 & CSA C22.2#60335-2-9:2020 Ed.2 / Clause	UL 746C:2018 Ed.7+R:30Jun2022 / Clause
Stability Test	8	-	-
Strain Relief Test	10	-	-
Overcurrent and Over-Temperature Protection	19	-	-
Leakage Current Test	38	-	-
Operational Test	39	-	-
Tests for Insulation Resistance and Leakage Current as a Result of Moisture	43	-	-
Push-Back Relief Test	47	-	-
Metal Enclosure Impact Test	52		
Non-Metallic Enclosure-Fasteners Test	53	-	-
Abnormal Operation Test	55	-	-
Component Switches and Control Devices	60	-	-
Protection Against Access to Live Parts	-	8	-
Leakage Current and Electric Strength at Operating Temperature	-	13	-
Moisture Resistance	-	15	-
Leakage Current and Electric Strength	-	16	-
Overload Protection of Transformers and Associated Circuits	-	17	-
Abnormal Operation	-	19	-
Stability and Mechanical Hazards	-	20	-
Mechanical Strength	-	21	-
Construction	-	22	-
Supply connection and external flexible cords	-	25	-
Provision for Earthing	-	27	-
Screws and connections	-	28	-
Creepage Distance and Clearance	-	29	-
Resistance to heat and fire	-	30	-
Strain-Relief Test after Mold Stress-Relief Distortion	-	-	31
Polymeric Enclosure Impact Test	-	-	56
Mold Stress-Relief Distortion Test	-	-	61

Test Description	UL 1004-2:2014 Ed.2+R:28Feb2020 / Clause	CSA C22.2#77:2014 Ed.8+E1 / Clause	CSA C22.2#100:2014 Ed.7+U1 / Clause
Locked-Rotor or No-Load Temperature Test	3	-	-
Endurance Test	4	-	-
Locked-Rotor Temperature	-	6.4	-
Dielectric Strength	-	6.5	7.4
Endurance	-	6.6	-

8.0 Test Summary			
Test Description	UL 982:2019 Ed.8+R:23Apr2024 / Clause	(R2018) [CSA C22.2#1335.1:1993 Ed.1+G1] & (R2018) [CSAC22.2#1335.2.14:1993 Ed.1+G1] / Clause	-
Grounding	19	-	-
Moving Members	23	-	-
Stability	24	-	-
Enclosure and Guards	26	-	-
Grounding Test	31	-	-
Leakage Current Test	32	-	-
Operational Tests	33	-	-
Starting Current Test	34	-	-
Leakage Current Following Humidity Tests	38	-	-
Flooding of Live Parts - Ingress Test	40	-	-
Test for Reliability of Parts Not Subject to Flexing	42	-	-
Abnormal Operation Test	49	-	-
Glass Window or Door Impact Test	50	-	-
Electronic Control Circuit Test	53	-	-
Switch Overload Test	56	-	-
Interlock system endurance test	58	-	-
Strain Relief Test	59	-	-
Push-back Relief Test	60	-	-
Enclosures of Polymeric Material for Portable Appliances	64	-	-
Thermoplastic Coil Forms and Thermoplastic Insulating Material	66	-	-
Starting Current Test	-	9	-
Leakage Current and Electric Strength at Operating Temperature-Leakage Current	-	13	-
Flooding and Overflow (Motor-Operated Appliances)	-	15.2.1	-
Leakage Current Following Humidity (Motor-Operated Appliances)	-	15.3.1	-
Locked Rotor Test	-	19.7	-
Electronic Control Circuits Test	-	19.11	-
Sever-use Conditions	-	19.10.1-19.10.3	-
Stability	-	20.1	-
Enclosure and Guards	-	20.2.7	-
Impact Test	-	21.2	-
Switch Overload Test	-	24.15.2	-
Strain Relief	-	25.15.1	-
Enclosures of Polymeric Material for Portable and Under-the-Cabinet Motor- Operated Appliances	-	30.4-30.10	-
Test Description	Functional Safety	-	-
Functional Safety Clause SA3	NA	-	-
The above noted clauses have been properly addressed	Runze Hu	-	-

8.0 Test Summary					
Evaluation Period	31-Dec-2024 - 09-Feb-2026			Project No.	241231145GZU
Sample Rec. Date	31-Dec-2024	Condition	Prototype	Sample ID.	OGC-S241231145-001~004
Test Location	Foshan OGC Testing Service Co., Ltd. Room 416-1, Tianfulai Hardware Park, No.25 XinfaRoad, Ronggui, Shunde, Foshan,Guangdong, China				
Test Procedure	Testing at Manufacturers Premise				
Determination of the result includes consideration of measurement uncertainty from the test equipment and methods. The product was tested as indicated below with results in conformance to the relevant test criteria.					
The following tests were performed:					

Test Description	UL 1026:2012 Ed.6+R:29Sep2023 / Clause	CSA C22.2#60335-1:2016 Ed.2 & CSA C22.2#60335-2-9:2020 Ed.2 / Clause	-
Power Input Test	37	-	-
Normal Temperature Test	41	-	-
Dielectric Voltage-Withstand Test	44	-	-
Power Input and Current	-	10	-
Heating	-	11	-
Leakage Current and Electric Strength at Operating Temperature-Electric Strength	-	13	-
Temperature rise for touchable surface (for Ovens, rotary grills and cookers)	-	11.102	-

Test Description	UL 982:2019 Ed.8+R:23Apr2024 / Clause	(R2018) [CSA C22.2#1335.1:1993 Ed.1+G1] & (R2018) [CSAC22.2#1335.2.14:1993 Ed.1+G1] / Clause	-
Surface Temperatures	28	-	-
Input Test	35	-	-
Normal Temperature Test	36	-	-
Dielectric Voltage-Withstand Test	37	-	-
Power Input and Current Test	-	10	-
Heating (Normal Temperature) Test	-	11	-
Electric Strength Test	-	16	-

8.1 Signatures			
A representative sample of the product covered by this report has been evaluated and found to comply with the applicable requirements of the standards indicated in Section 1.0.			
Completed by:	Richard Chen	Reviewed by:	Kevin Ye
Title:	Engineer	Title:	Project Engineer
Signature:		Signature:	

9.0 Correlation Page For Multiple Listings	
The following products, which are identical to those identified in this report except for model number and Listee name, are authorized to bear the ETL label under provisions of the Intertek Multiple Listing Program.	
BASIC LISTEE	Zhejiang Tianxi Kitchen Appliance Co., Ltd.
Address	No. 1 West 2nd Road, Huzhen Town, Jinyun, LISHUI Zhejiang 321404
Country	CHINA
Product	Cookie Maker

MULTIPLE LISTEE 1	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	

MULTIPLE LISTEE 1 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 2	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	

MULTIPLE LISTEE 2 MODELS	BASIC LISTEE MODELS

MULTIPLE LISTEE 3	None
Address	
Country	
Brand Name	
ASSOCIATED MANUFACTURER	
Address	
Country	

MULTIPLE LISTEE 3 MODELS	BASIC LISTEE MODELS

10.0 General Information

The Applicant and Manufacturer have agreed to produce, test and label ETL Listed products in accordance with the requirements of this Report. The Manufacturer has also agreed to notify Intertek and to request authorization prior to using alternate parts, components or materials.

COMPONENTS

Components used shall be those itemized in this Intertek report covering the product, including any amendments and/or revisions.

LISTING MARK

The ETL Listing mark applied to the products shall either be separable in form, such as labels purchased from Intertek, or on a product nameplate or other media only as specifically authorized by Intertek. Use of the mark is subject to the control of Intertek.

The mark must include the following four items:

1) applicable country identifiers "US" and/or "C" or "US", "C" and "EU"
2) the word "Listed" or "Classified" or "Recognized Component" (whichever is appropriate)
3) a control number issued by Intertek
4) a product descriptor that identifies the standards used for certification. Example:

For US standards, the words, “Conforms to” shall appear with the standard number along with the word, “ Standard” or “Std.” Example: “Conforms to ANSI/UL Std. XX.”

For Canadian standards, the words “Certified to CAN/CSA Standard CXX No. XX.” shall be used, or abbreviated, “Cert. to CAN/CSA Std. CXX No. XX.”

Can be used together when both standards are used.

If all standards on the ATM have the same standard title, the shared title or its abbreviation may be used in place of the examples above. Example: "Medical Electrical Equipment" or "MEE"; "Information Technology Equipment" or "ITE"; "Audio/Video Information And Communication Technology Equipment" or "A/V ICTE".

Note: A facsimile must be submitted to Intertek, Attn: Follow-up Services for approval prior to use. The facsimile need not have a control number. A control number will be issued **after signed Certification Agreements** have been received by the Follow-up Services office, approval of the facsimile of your proposed Listing Mark, satisfactory completion of the Listing Report, and scheduling of a factory assessment in your facility.

MANUFACTURING AND PRODUCTION TESTS

Manufacturing and Production Tests shall be performed as required in this Report.

FOLLOW-UP SERVICE

Periodic unannounced audits of the manufacturing facility (and any locations authorized to apply the mark) shall be scheduled by Intertek. An audit report shall be issued after each visit. Special attention will be given to the following:

1. Conformance of the manufactured product to the descriptions in this Report.
2. Conformance of the use of the ETL mark with the requirements of this Report and the Certification Agreement.
3. Manufacturing changes.
4. Performance of specified Manufacturing and Production Tests.

In the event that the Intertek representative identifies non-conformance(s) to any provision of this Report, the Applicant shall take one or more of the following actions:

1. Correct the non-conformance.
2. Remove the ETL Mark from non-conforming product.
3. Contact the issuing product safety evaluation center for instructions.

10.1 Evaluation of Unlisted Components

Because Unlisted Components are uncontrolled, and they do not fall under a third party follow up program, Intertek may require these components to be tested and/or evaluated at least once annually, more often for certain components, as part of the independent certification process. The Unlisted Components in Section 5.0 require testing and/or evaluation as indicated.

The Applicant will be notified, in writing, via the applicable contact methods, as defined in Section 1.0, when these components must be selected and sent to Component Evaluation Center (CEC) for re-evaluation.

Due to particular testing requirements, some components may be requested to be shipped to specific labs. Thus, specific shipment destination(s) for each sample will be provided in the written notification.

Managing CEC Location:
Intertek Testing Services Shenzhen Ltd., Shunde Branch
ETL Component Evaluation Center
Room 202/203/204, Block 8, Tianfulai International Industrial Park, No.3, Changfu West Road, Rongli Community, Ronggui Subdistrict,
Shunde District, Foshan, Guangdong, China
Attn: Ms. Joey Kuang

Sample Disposition: Due to the destructive nature of the testing, all samples will be discarded at the conclusion of testing unless, the manufacturer specifically requests the return of the samples. The request for return must accompany the initial component shipment.

11.0 Manufacturing and Production Tests

The manufacturer agrees to conduct the following Manufacturing and Production Tests as specified:

Required Tests

Dielectric Voltage Withstand Test
Grounding Continuity Test
Polarization Test

11.1 Dielectric Voltage Withstand Test

Method

One hundred percent of production of the products covered by this Report shall be subjected to a routine production line dielectric withstand test.

The test shall be conducted on products, which are fully assembled. Prior to applying the test potential, all switches, contactors, relays, etc., should be closed so that all primary circuits are energized by the test potential. If all primary circuits cannot be tested at one time, then separate applications of the test potential shall be made.

The test voltage specified below shall be applied between primary circuits and accessible dead-metal parts. The test voltage may be gradually increased to the specified value but must be maintained at the specified value for one second or one minute as required.

Test Equipment

The test equipment shall incorporate a transformer with an essentially sinusoidal output, a means to indicate the applied test potential, and an audible and/or visual indicator of dielectric breakdown.
The test equipment shall incorporate a voltmeter in the output circuit to indicate directly the applied test potential if the rated output of the test equipment is less than 500VA.
The test voltage and a resistance of 120,000 ohms is connected across the output, the test equipment is to indicate an unacceptable performance within 0.5 second. A resistance of more than 120,000 ohms may be used to produce an indication of unacceptable performance.
If the rated output of the test equipment is 500VA or more, the applied test potential may be indicated by either:
1 - a voltmeter in the primary circuit;
2 - a selector switch marked to indicate the test potential; or
3 - a marking in a readily visible location to indicate the test potential for test equipment having a single test potential output.
In cases 2 and 3, the test equipment shall include a lamp or other visual means to indicate that the test potential is present at the test equipment output. All test equipment shall be maintained in current calibration.

Products Requiring Dielectric Voltage Withstand Test:

Product	Test Voltage	Test Time
All products covered by this Report.	1000V or 1200V	60 s 1 s

11.2 Grounding Continuity Test

Method

Each product listed below shall be subjected to a test to determine that there is continuity between accessible dead-metal parts of the product and the grounding pin or blade of the attachment plug.

If all accessible dead metal is connected, only a single test need be performed. A visual or audible device (ohmmeter, buzzer, etc.) may be used to indicate grounding continuity.

Products Requiring Grounding Continuity Test:

All products covered by this Report.

11.3 Polarization Test

Method

As a routine production-line verification, each cord-connected appliance provided with a 2-wire polarized or 3-wire grounding attachment plug, shall be examined or tested for electrical continuity between the ungrounded circuit supply conductor of the attachment plug (see Figure 10.1 for attachment plug blade connections) and all components intended to be connected to the ungrounded conductor. If the continuity cannot be readily determined by visual inspection and component checking, an electrical continuity test is to be conducted.

a) The switch, if employed and

b) The thermal protect device, if employed

Any indicating device such as ohmmeter, a battery-and-buzzer combination, or the like, shall be used to determine compliance with the continuity requirements mentioned above.

Products Requiring Polarization Test:

All products covered by this Report.

12.0 Revision Summary				
The following changes are in compliance with the declaration of Section 8.1:				
Date/ Proj # Site ID	Project Handler/ Reviewer	Section	Item	Description of Change
				None